



DAIKIN


Refrigerant Recovery Process

Prepare By: Hairul Fahmi
Sharul Hakim

1) Put recovery cylinder to weighing scale.



2) Connect middle hose of manifold gauge to recovery machine.

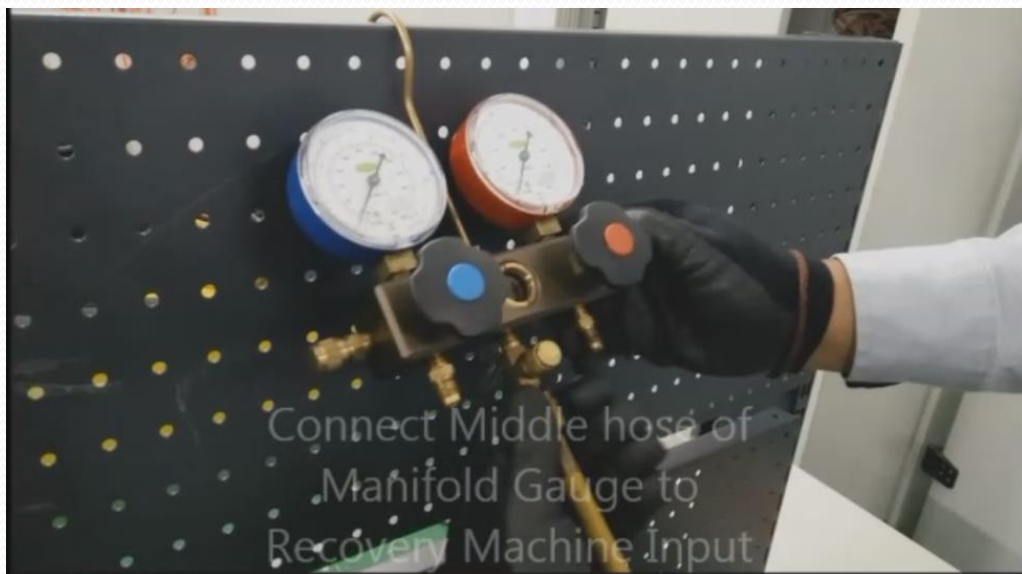

3) Connect low side hose of manifold gauge to suction service port.




4) Connect hose from recovery cylinder to recovery machine.



5) Open valve of suction service port.



6) Open low side valve of manifold gauge.

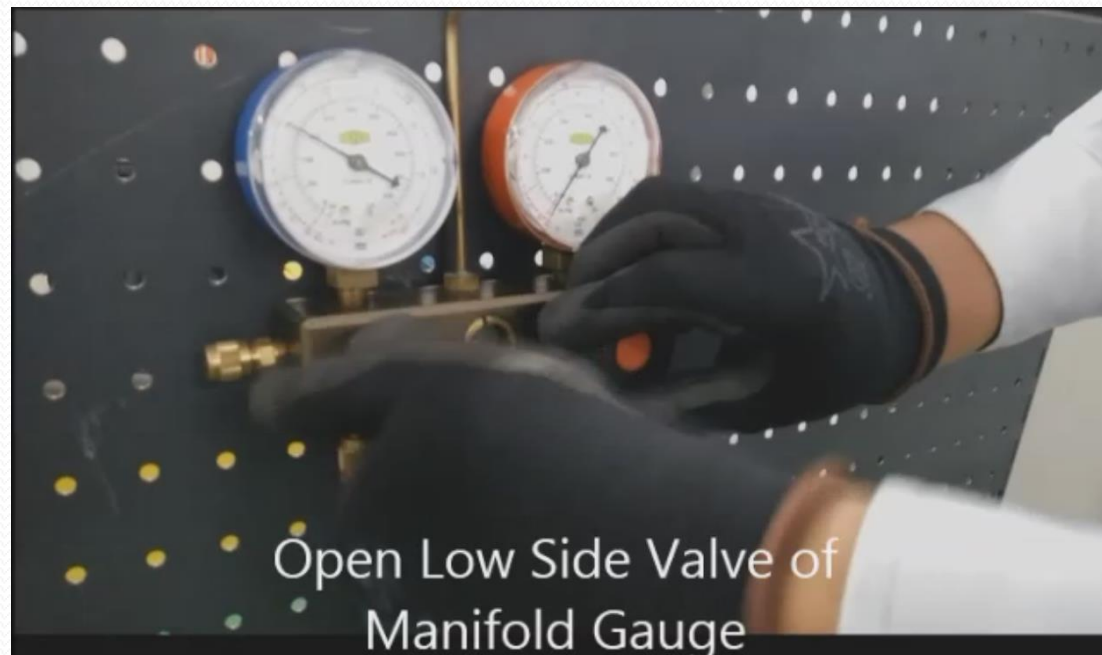

7) Open input valve of recovery machine.




8) Open valve of recovery cylinder.




9) Open output valve of recovery machine.



10) Select center button to recovery.

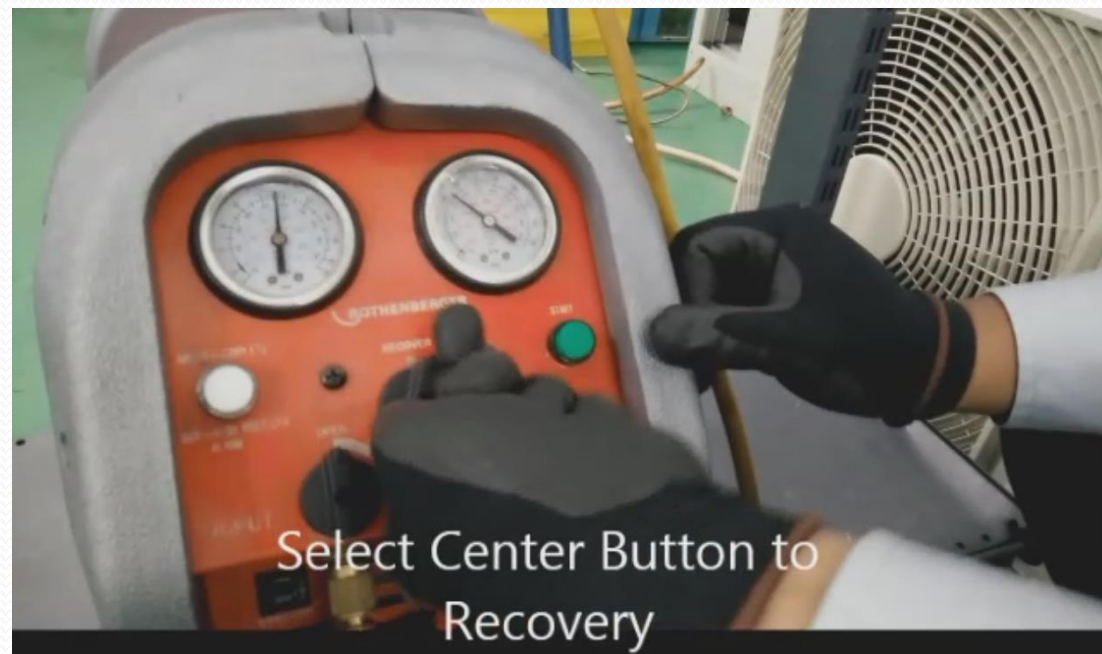


11) Turn On weighing scale and make sure display become zero.

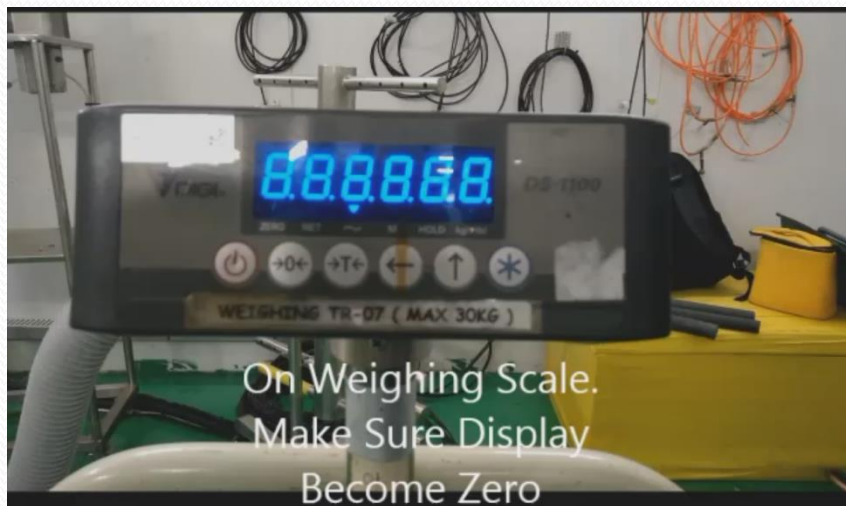


12) Turn on the recovery machine to start recovery.



13) When low side of manifold gauge become zero, lamp indicator automatically indicated.

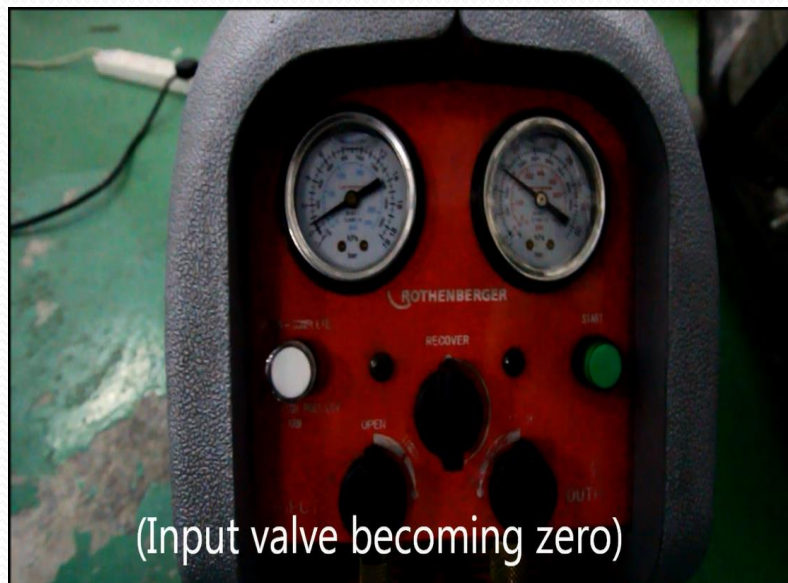

14) Close the low side valve and turn off the recovery unit.

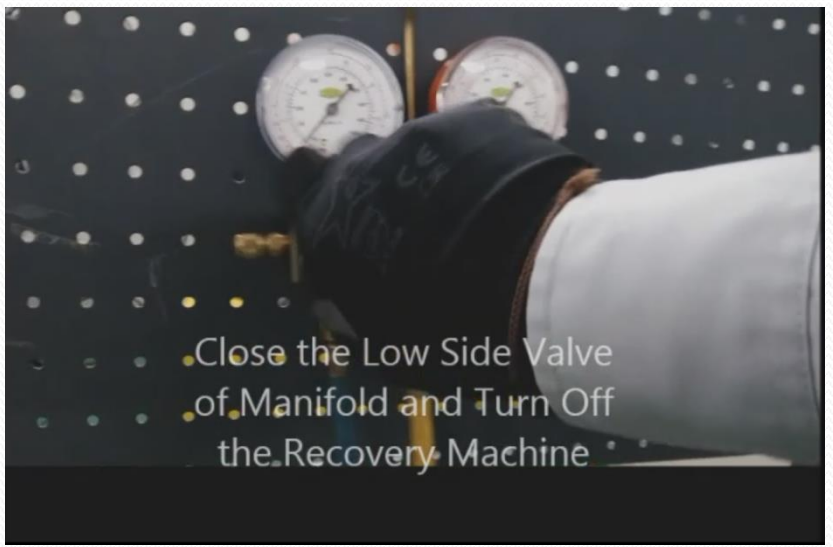

Thank You