






The above equipment is recommended for refrigerant recovery process:

- 1) **A Recovery Unit** that is suitable for the type of refrigerant recovery.
- 2) **A Recovery Cylinder** with two connection ports to enable charging of liquid and extraction of vapour simultaneously.
- 3) **A Digital Weighing Scale**, used to avoid overfilling the Recovery Cylinder and ensuring that the exact amount of refrigerant in the system. This aids monitoring of consumption and leakage.
- 4) **A Manifold Gauge** with pressure and suction gauges and connection hoses.



Refrigerant process flow

DAIKIN

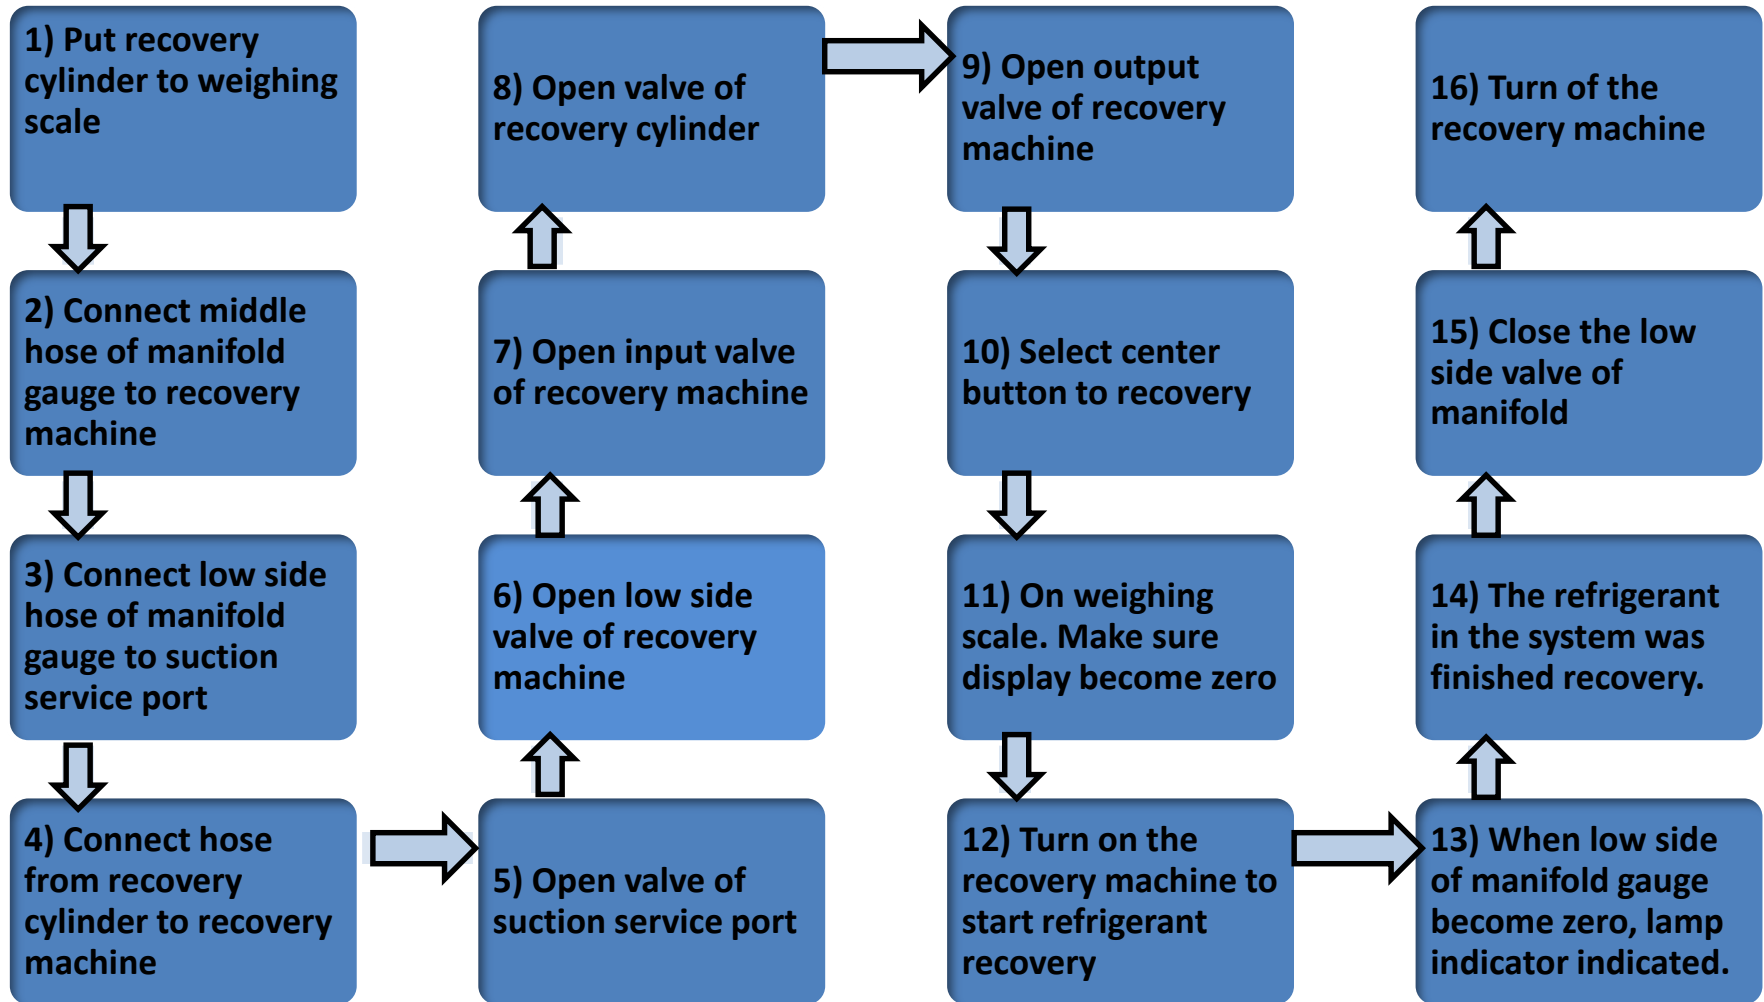



Thank You