

FOR REFERENCE PURPOSES ONLY

Topics in Current Chemistry collections

Carol Sze Ki Lin *Editor*

Chemistry and Chemical Technologies in Waste Valorization



Springer

Topics in Current Chemistry Collections

Journal Editors

Massimo Olivucci, Siena, Italy and Bowling Green, USA
Wai-Yeung Wong, Hong Kong

Series Editors

Hagan Bayley, Oxford, UK
Kendall N. Houk, Los Angeles, USA
Greg Hughes, Codexis Inc, USA
Christopher A. Hunter, Cambridge, UK
Seong-Ju Hwang, Seoul, South Korea
Kazuaki Ishihara, Nagoya, Japan
Barbara Kirchner, Bonn, Germany
Michael J. Krische, Austin, USA
Delmar Larsen, Davis, USA
Jean-Marie Lehn, Strasbourg, France
Rafael Luque, Córdoba, Spain
Jay S. Siegel, Tianjin, China
Joachim Thiem, Hamburg, Germany
Margherita Venturi, Bologna, Italy
Chi-Huey Wong, Taipei, Taiwan
Henry N.C. Wong, Hong Kong
Vivian Wing-Wah Yam, Hong Kong
Chunhua Yan, Beijing, China
Shu-Li You, Shanghai, China

Aims and Scope

The series *Topics in Current Chemistry Collections* presents critical reviews from the journal *Topics in Current Chemistry* organized in topical volumes. The scope of coverage is all areas of chemical science including the interfaces with related disciplines such as biology, medicine and materials science.

The goal of each thematic volume is to give the non-specialist reader, whether in academia or industry, a comprehensive insight into an area where new research is emerging which is of interest to a larger scientific audience.

Each review within the volume critically surveys one aspect of that topic and places it within the context of the volume as a whole. The most significant developments of the last 5 to 10 years are presented using selected examples to illustrate the principles discussed. The coverage is not intended to be an exhaustive summary of the field or include large quantities of data, but should rather be conceptual, concentrating on the methodological thinking that will allow the non-specialist reader to understand the information presented.

Contributions also offer an outlook on potential future developments in the field.

More information about this series at <http://www.springer.com/series/14181>

Carol Sze Ki Lin

Editor

Chemistry and Chemical Technologies in Waste Valorization

With contributions from

Nils Kristian Afseth • Themistoklis Altintzoglou • Tone Aspevik
Ronan Behling • Julen Bustamante • Gregory Chatel • Yong Chen
James H. Clark • Juan Carlos Colmenares • Chenyu Du
Thomas I. J. Dugmore • Asbjørn Gildberg • Joseph A. Houghton
Yunzi Hu • David Chi Wai Hui • Houde Jing • Ewelina Kuna
Shao-Yuan Leu • Carol Sze Ki Lin • Diana Lindberg • Hao Liu
Zhi-hui Liu • Greg Martin • Avtar S. Matharu • Gordon McKay
J. E. Mgya • E. B. Mubofu • Chao Ning • Åge Oterhals
Nattha Pensupa • Luize Z. Ramin • Sissel Beate Rønning
Li-ping Sun • Zheng Sun • Sabine Valange • Huaimin Wang
Ragnhild Dragøy Whitaker • Sileshi Gizachew Wubshet
Vânia G. Zuin



Springer

FOR REFERENCE PURPOSES ONLY

Editor

Carol Sze Ki Lin
School of Energy and Environment
City University of Hong Kong
Hong Kong, China

Partly previously published in Top Curr Chem (Z) Volume 375 (2017); Top Curr Chem (Z) Volume 376 (2018).

ISSN 2367-4067

Topics in Current Chemistry Collections
ISBN 978-3-319-90652-2

Library of Congress Control Number: 2018942227

© Springer International Publishing AG, part of Springer Nature 2018

The chapters “Sonocatalysis: A Potential Sustainable Pathway for the Valorization of Lignocellulosic Biomass and Derivatives”, “Valorisation of Biowastes for the Production of Green Materials Using Chemical Methods” and “Green and Sustainable Separation of Natural Products from Agro-Industrial Waste: Challenges, Potentialities, and Perspectives on Emerging Approaches” are licensed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>). For further details see license information in the chapters.

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, express or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Switzerland AG
The registered company address is: Gewerbestrasse 11, 6330 Cham, Switzerland

Contents

Preface.....	vii
Sonocatalysis: A Potential Sustainable Pathway for the Valorization of Lignocellulosic Biomass and Derivatives	1
Ewelina Kuna, Ronan Behling, Sabine Valange, Gregory Chatel and Juan Carlos Colmenares: Top Curr Chem (Z) 2017, 2018:41 (23, March 2017) DOI 10.1007/s41061-017-0122-y	
Waste Printed Circuit Board (PCB) Recycling Techniques.....	21
Chao Ning, Carol Sze Ki Lin, David Chi Wai Hui and Gordon McKay: Top Curr Chem (Z) 2017, 2018:43 (28, March 2017) DOI 10.1007/s41061-017-0118-7	
Chemical Valorization of Cashew Nut Shell Waste	57
E. B. Mubofua and J. E. Mgya: Top Curr Chem (Z) 2018, 2018:8 (13, February 2018) https://doi.org/10.1007/s41061-017-0177-9	
Valorisation of Biowastes for the Production of Green Materials Using Chemical Methods	73
Thomas I. J. Dugmore, James H. Clark, Julien Bustamante, Joseph A. Houghton and Avtar S. Matharu: Top Curr Chem (Z) 2017, 2018:46 (3, April 2017) DOI 10.1007/s41061-017-0133-8	
Valorization of Proteins from Co- and By-Products from the Fish and Meat Industry	123
Tone Aspevik, Åge Oterhals, Sissel Beate Rønning, Themistoklis Altintzoglou, Sileshi Gizachew Wubshet, Asbjørn Gildberg, Nils Kristian Afseth, Ragnhild Dragøy Whitaker and Diana Lindberg: Top Curr Chem (Z) 2017, 2018:53 (2, May 2017) DOI 10.1007/s41061-017-0143-6	

Integration of Waste Valorization for Sustainable Production of Chemicals and Materials via Algal Cultivation.....	151
Yong Chen, Li-ping Sun, Zhi-hui Liu, Greg Martin and Zheng Sun: Top Curr Chem (Z) 2017, 2018:89 (27, November 2017) https://doi.org/10.1007/s41061-017-0175-y	
Recent Trends in Sustainable Textile Waste Recycling Methods: Current Situation and Future Prospects	189
Nattha Pensupa, Shao-Yuan Leu, Yunzi Hu, Chenyu Du, Hao Liu, Houde Jing, Huaimin Wang and Carol Sze Ki Lin: Top Curr Chem (Z) 2017, 2018:76 (16, August 2017) DOI 10.1007/s41061-017-0165-0	
Green and Sustainable Separation of Natural Products from Agro-Industrial Waste: Challenges, Potentialities, and Perspectives on Emerging Approaches	229
Vânia G. Zuin and Luize Z. Ramin: Top Curr Chem (Z) 2018, 2018:3 (17, January 2018) https://doi.org/10.1007/s41061-017-0182-z	
Erratum to: Valorization of Proteins from Co- and By-Products from the Fish and Meat Industry	283
Tone Aspevik, Åge Oterhals, Sissel Beate Rønning, Themistoklis Altintzoglou, Sileshi Gizachew Wubshet, Asbjørn Gildberg, Nils Kristian Afseth, Ragnhild Dragøy Whitaker and Diana Lindberg: Top Curr Chem (Z) 2017, 2018:57 (16, May 2017) DOI 10.1007/s41061-017-0146-3	

Preface

Increasing demand for consumer goods from an exploding world population is placing enormous strain on the resources needed by the world's manufacturing industries. Traditional resources have often been from non-renewable sources located in relatively accessible regions, but these are finite, their exploitation non-sustainable, and they are becoming scarce. At the same time, the wastes generated in manufacturing and in use of the articles of today's society have been allowed to accumulate in rapidly filling landfill sites or disposed of in other environmentally harmful ways.

As the Editor in this special issue of *Topics in Current Chemistry* entitled 'Chemistry and Chemical Technologies in Waste Valorization', I have selected relevant works from worldwide respected and well-known leaders on this hot topic. The aim of this collection is to familiarize chemists with techniques and technologies used in waste valorization, and to show that chemistry plays an important role in transforming waste to useful resources.


Prof. Juan Carlos Colmenares's contribution deals with the use of sonocatalysis which is related to the use of a catalytic conversion method assisted by ultrasound energy [1]. This constitutes an alternative way for biomass upgrading. The possibility of combining catalysis with sonication provides an effective conversion method for lignocellulosic wastes. His review highlights recent progress and methods based on catalysis assisted by ultrasound energy for the transformation of lignocellulosic biomass into valuable products. Whereas Prof. Gordon McKay's contribution deals with various waste printed circuit board (WPCB) treatment methods as well as recycling techniques of WPCB divided into direct treatment (landfill and incineration), primitive recycling technology (pyrometallurgy, hydrometallurgy, biometallurgy and primitive full recovery of NMF-non metallic fraction) and

advanced recycling technology (mechanical separation, direct use and modification of NMF). These topics are reviewed and analyzed based on their advantages and disadvantages [2]. Also the evaluation criteria are discussed including economic, environmental and gate-to-market ability. His review indicates the future research direction of WPCB recycling should focus on a combination of several techniques or in series recycling to maximize the benefits of process.

Prof. James Clark presents an overview on some of the more recent developments in processing the three main components of biomass—carbohydrates, lipids, and proteins for green materials, as well as case studies that bring these technologies and materials together into final products for applied usage [3]. Similarly, Prof. Mubofu Egid reports the valorisation of cashew nut shells liquid (CNSL) via various chemical reactions for the production of industrially important chemicals and materials [4]. The reactions involved in these transformations include transfer hydrogenation reactions, isomerization reactions, metathesis reactions, carbonylation reactions, polymerization reactions, isomerizing metathesis reactions, and isomerizing carbonylation reactions. Dr. Diana Lindberg's contribution covers all the important aspects of achieving optimal utilization of proteins in residual raw materials, such as heads, bones, carcasses, blood, skin, viscera, hooves and feathers originating from the fisheries, aquaculture, livestock and poultry sectors [5]. Her review includes industrially applied technologies such as freezing/cooling, acid preservation, salting, rendering and protein hydrolysis. In this regard, it is important to achieve stable production and quality through all the steps in the manufacturing chain, preferably supported by at- or online quality control points in the actual processing step. If aiming for the human market, knowledge of consumer trends and awareness are important for production and successful introduction of new products and ingredients.

Dr. Nattha Pensupa's contribution provides an overview of valorization of textile waste to value-added products, as well as an overview of different strategies for sugar recovery from cellulosic fiber and their hindrances [6]. Prof. Zheng Sun presents a critical review of recent technological developments in the production of chemicals and other materials from microalgae grown using different types of waste. A range of novel approaches are examined for efficiently capturing CO₂ in flue gas via photosynthetic microalgal cultivation. Strategies for using microalgae to assimilate nitrogen, organic carbon, phosphorus, and metal ions from wastewater are considered in relation to modes of production [7]. Lastly, Prof. Vania G. Zuin presents a review on green and sustainable separation of natural products from agro-industrial waste [8]. Her review discusses the concepts of green and sustainable separation of natural products, with highlights of the main studies conducted on this topic over the last 10 years. The principal analytical techniques (such as solvent, microwave, ultrasound and supercritical treatments), byproducts (e.g., citrus, coffee, corn and sugarcane waste) and target compounds (polyphenols, proteins, essential oils, etc.) are covered. These include the emerging green and sustainable separation approaches towards bioeconomy and circular economy contexts.

The guest editor would like to express her appreciation and gratitude to the Topics in Current Chemistry editorial office (Springer) for their kind invitation to compile this comprehensive topical collection on **Chemistry and Chemical Technologies in Waste Valorisation**. I would also like to extend my most sincere gratitude to thank all the authors and reviewers who contributed to the publication of this topical collection. It was a pleasing experience to work with them on this topical collection. Last but not least, I sincerely thank the publishing editors, Elizabeth Hawkins and Charlotte Hollingworth and assistant editor, Na Xu, who patiently and kindly took us through the development of this topical collection over the past two years to achieve this impressive final result, which would not have been possible without such support.

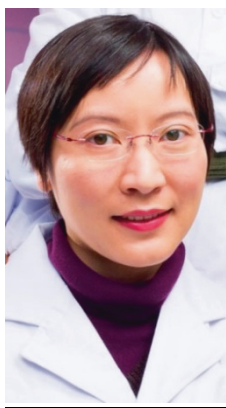

Carol Sze Ki Lin
School of Energy and Environment
City University of Hong Kong
Tat Chee Avenue, Kowloon, Hong Kong

References

1. Kuna, E., Behling, R., Valange, S., Chatel, G., Colmenares, J.C. 2017. Sonocatalysis: A Potential Sustainable Pathway for the Valorization of Lignocellulosic Biomass and Derivatives. *Topics in Current Chemistry*, **375**(2), 41.
2. Ning, C., Lin, C.S.K., Hui, D.C.W., McKay, G. 2017. Waste Printed Circuit Board (PCB) Recycling Techniques. *Topics in Current Chemistry*, **375**(2), 43.
3. Mubofu, E.B., Mgya, J.E. 2018. Chemical Valorization of cashew nut shells waste. *Topics in Current Chemistry*.
4. Dugmore, T.I.J., Clark, J.H., Bustamante, J., Houghton, J.A., Matharu, A.S. 2017. Valorisation of Biowastes for the Production of Green Materials Using Chemical Methods. *Topics in Current Chemistry*, **375**(2), 46.
5. Aspevik, T., Oterhals, Å., Rønning, S.B., Altintzoglou, T., Wubshet, S.G., Gildberg, A., Afseth, N.K., Whitaker, R.D., Lindberg, D. 2017. Valorization of Proteins from Co- and By-Products from the Fish and Meat Industry. *Topics in Current Chemistry*, **375**(3), 53.

6. Chen, Y., Sun, L.-p., Liu, Z.-h., Martin, G., Sun, Z. 2017. Integration of Waste Valorization for Sustainable Production of Chemicals and Materials via Algal Cultivation. *Topics in Current Chemistry*, **375**(6), 89.
7. Pensupa, N., Leu, S.-Y., Hu, Y., Du, C., Liu, H., Jing, H., Wang, H., Lin, C.S.K. 2017. Recent Trends in Sustainable Textile Waste Recycling Methods: Current Situation and Future Prospects. *Topics in Current Chemistry*, **375**(5), 76.
8. Zuin, V.G., Ramin, L.Z. 2018. Green and sustainable separation of natural products from agro-industrial waste: challenges, potentialities and perspectives on emerging approaches. *Topics in Current Chemistry*.



Sonocatalysis: A Potential Sustainable Pathway for the Valorization of Lignocellulosic Biomass and Derivatives

Ewelina Kuna¹ · Ronan Behling² · Sabine Valange² · Gregory Chatel³ · Juan Carlos Colmenares¹

Received: 21 November 2016 / Accepted: 18 February 2017 / Published online: 23 March 2017
© The Author(s) 2017. This article is an open access publication

Abstract Lignocellulosic biomass represents a natural renewable chemical feedstock that can be used to produce high value-added chemicals and platform molecules. Nowadays, there are extensive studies on a variety of aspects concerning the valorization of lignocellulosic biomass into desirable products. Among the current technologies for biomass conversion some require extreme conditions along with high temperatures and pressures. Therefore, major technological innovations based on more economical and environmental methodologies are currently developed both in academic laboratories and in industry. In this context, ultrasound-assisted catalysis constitutes an alternative method offering new strategies to upgrade biomass. The possibility of combining catalysis with sonication indeed provides avenues that are worth exploring for the valorization of lignocellulosic compounds into value-added chemical feedstocks. In this mini-review, the available sonochemical systems are first presented, with a focus on the most important ultrasonic parameters, which is intended to provide a mechanistic background. Next, this contribution aims to provide insight into the most recent developments along with prominent examples in the field of sonocatalysis applied to the chemical transformation of lignocellulosic biomass and its derivatives.

Chapter 1 was originally published as Kuna, E., Behling, R., Valange, S., Chatel, G. & Colmenares, J. C. Top Curr Chem (Z) (2017) 375: 41. DOI 10.1007/s41061-017-0122-y.

✉ Gregory Chatel
gregory.chatel@univ-smb.fr


✉ Juan Carlos Colmenares
jcarloscolmenares@ichf.edu.pl

¹ Institute of Physical Chemistry, Polish Academy of Sciences, Kasprzaka 44/52, 01-224 Warsaw, Poland

² Institut de Chimie des Milieux et Matériaux de Poitiers (IC2MP), Université de Poitiers, CNRS, ENSIP, B1, 1 rue Marcel Doré, 86073 Poitiers Cedex 9, France

³ Univ. Savoie Mont Blanc, LCME, F-73000 Chambéry, France

Graphical Abstract

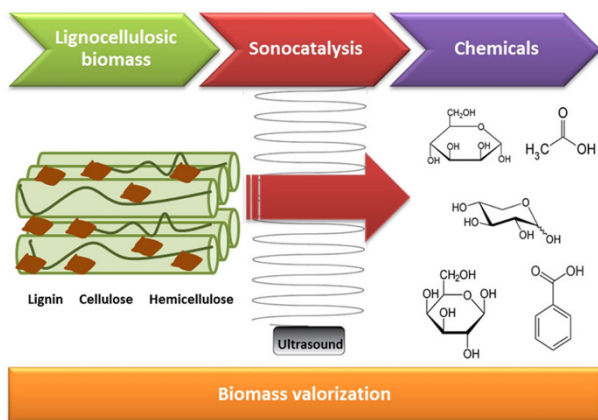

Keywords Sonochemistry · Sonocatalysis · Biomass upgrading · Lignocellulosic waste valorization · Lignocellulose depolymerization

1 Introduction

The worldwide accessibility of biomass undoubtedly plays a fundamental role in sustainable energy production. In favorable circumstances, around 25% of global energy requirements can be supplied by biomass [1]. The enormous potential of plant materials resides in the presence of lignocellulosic residues coming from forest residues, energy crops, municipal and industrial wastes [2]. This type of renewable resource is now increasingly used for the production of value-added chemicals and transport fuels [3]. Nevertheless, plant dry matter possesses a sturdy structure, which complicates the effective conversion process of lignocellulosic biomass into platform chemicals. Lignocellulose is a recalcitrant biopolymer composed of the semi-crystalline polysaccharide cellulose, the polysaccharide hemicellulose, and the three-dimensional amorphous phenylpropanoid lignin polymer [4, 5]. The conversion of lignocellulosic feedstock leads to the production of a variety of added value platform chemicals, including phenolic compounds (*p*-coumaryl alcohol, coniferyl alcohol, and sinapyl alcohol), aliphatic acids (formic acid, acetic acid, levulinic acid), and furan aldehydes (hydroxymethyl furfural) [6]. It is worth mentioning that the accessibility to desired products is dependent on biomass pretreatment methods, which have a significant influence on the production of their derived feedstocks for further valorization strategies. Notwithstanding, the selection of the most favorable pretreatment process depends predominantly on the target molecule and many other factors such as economical and environmental aspects [7]. The depolymerization process of lignocellulosic biomass includes physical, chemical, and biological treatments, as well as various combinations thereof (Fig. 1) [7–9]. The physical pretreatment of biomass as a first step for

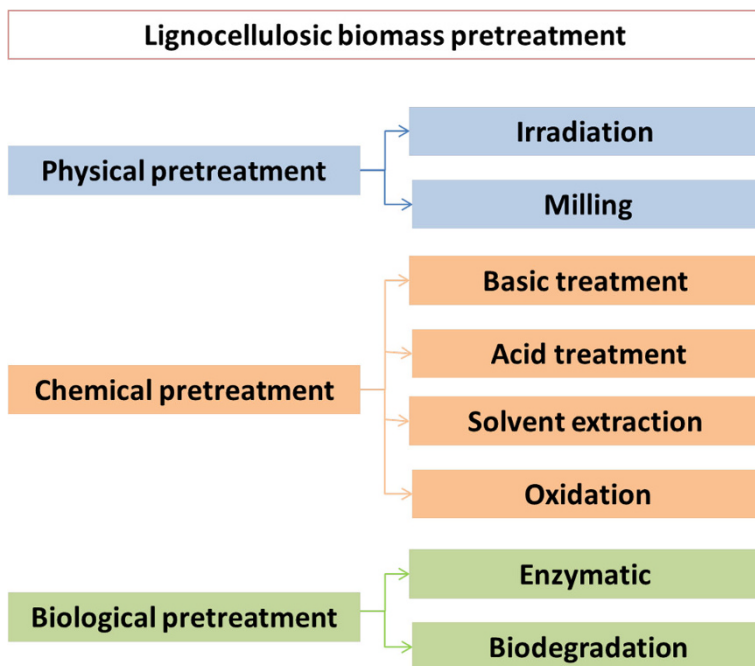


Fig. 1 Methods for pretreatment of lignocellulosic biomass. (Adapted and modified from Ref. [9])

further upgrading is achieved by mechanical comminution of lignocellulosic materials through a combination of chipping, grinding, or milling. In the particular case of cellulosic biomass, such physical process leads to a size reduction due to a decrease of both the degree of polymerization and the crystallinity, resulting in the increase of the mass transfer and the improvement of the hydrolyzation reaction. However, the energy consumption required for physical treatment is higher than the theoretical energy content available in lignocellulose, which makes it prohibitively expensive for large-scale uses [10]. An alternative for deconstructing lignocellulosic biomass is chemical pretreatment. This method is based on catalytic processes such as acid/alkaline hydrolysis, oxidative delignification, cracking, reduction reaction, among others [11]. Acid pretreatment allows converting hemicellulose into monomeric sugars (e.g. glucose, xylose) and soluble oligomers, whereas alkaline hydrolysis renders lignin recoverable. Delignification of lignocellulosic biomass can also be performed by treating in the presence of oxidizing agents (e.g. hydrogen peroxide, ozone, and oxygen) [12]. In most of these cases, catalysis increases the efficiency of the process and is responsible for the major effects achieved by pretreatment [13]. The application of catalysts provides a more effective approach in biological processing, where the yield of hydrolysis is relatively low along with long pretreatment times. Enzymatic hydrolysis can also be improved by combining ultrasonic pretreatment with the organosolv process. Ultrasound has the potential to enhance the separation and hydrolysis of lignocellulosic materials [12]. By contrast,

the combined use of organic solvents (including ionic liquids) or their mixtures with water was shown to enhance dissolution of biomass and increase depolymerization rates [14].

The immensity of available pretreatment methods creates opportunity to choose those which enable downstream processing of lignocellulosic biomass. Recovered carbohydrate polymers such as cellulose and hemicellulose can further be transformed into fermentable sugars and then into fuels or feedstock chemicals. Valuable products can also be obtained from lignin through development and integration of current and new technologies such as sonocatalysis, heterogeneous photocatalysis, or microwave-assisted conversion [15, 16]. According to a classification proposed in previous papers [8, 17] a simplified summary of conversion strategies is given in Fig. 2. Thermal technologies can be used to produce solid feedstocks (e.g. biochar), liquids (e.g. oils and viscous tars), and gaseous products. However, methods such as pyrolysis and gasification require large energy inputs due to the high processing temperatures. Chemical conversion techniques (e.g. catalyzed depolymerization, hydrotreating, oxidation, liquid-phase reforming) constitute a more energy efficient and environmentally sustainable way to valorize biomass [17].

In the present review, we focus on the recent literature advances on sonocatalytic valorization of lignocellulosic biomass and their platform molecules. It is evident that catalysis is regarded as a key route enabling technology for pretreatment and conversion of lignocellulosic biomass [8]. Over the past few years, research on the development and optimization of highly active and selective catalytic systems has been an ongoing activity to overcome drawbacks associated with harsh chemical conditions, low yield production, and high processing cost [18]. Additionally,

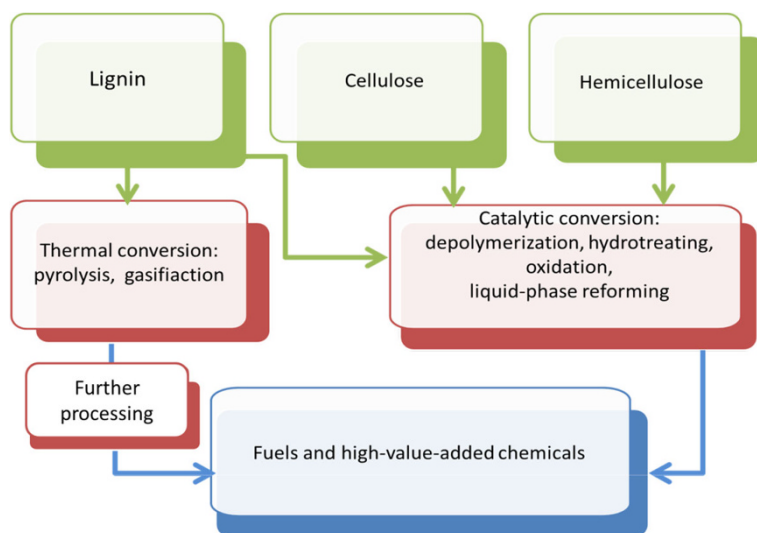


Fig. 2 Biorefinery strategies for lignocellulosic biomass valorization to fuels and chemicals. (Adapted and modified from Refs. [8, 17])

sonochemical-assisted reactions offer opportunities to develop environmentally friendly and cost-effective processes for biomass upgrading [4, 19].

2 Generalities on Sonochemistry

Sonochemical effects arise from cavitation, which is defined as the phenomenon of formation, growth, and implosive collapse of bubbles under the influence of an ultrasonic field in liquids [20, 21]. Cavitation can be categorized into various forms (acoustic, hydrodynamic, optic, and particle cavitation) depending on the method of generation and associated ultrasonic/experimental parameters (frequency, acoustic power, shape of the reactor, solvents, temperature, pressure, etc.). Acoustic and hydrodynamic cavitation may generate physical and chemical changes in solution in contrast to optic and particle cavitations. Numerous “hot spots” can be created by acoustic and hydrodynamic cavitation due to the accumulation of a huge amount of energy which in turn results in immense pressures and temperatures [22, 23]. The pressure fluctuation induced by changing the geometry of the flow system produces hydrodynamic cavitation, while the pressure fluctuation in the passageway of sound waves induced acoustic cavitation [24].

Acoustic cavitation takes place within collapsing bubbles (gas-phase chemistry), on the outer side of the bubbles (solution-phase chemistry) and at the liquid–solid interface (physical modification) [21]. The chemical and physical effects of ultrasound eventuate from the cavitation phenomenon and not from direct interaction between chemical species and ultrasonic waves [21, 25]. The chemical effect of ultrasound is the consequence of the implosive collapse of microbubbles, producing free-radicals, whereas the physical effects are the result of shock waves

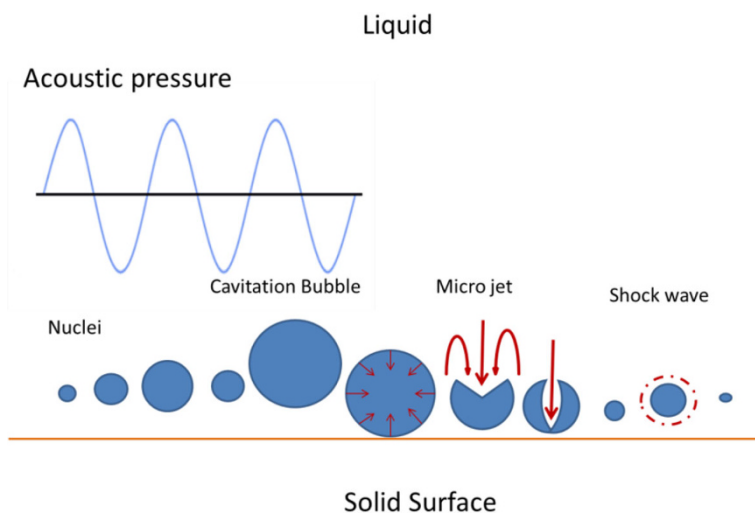


Fig. 3 Acoustic cavitation mechanism

and microjet generated during symmetric and asymmetric cavitation, respectively (Fig. 3) [26].

The rate of motion of ultrasound is significantly greater than the molecular scale [23]. Generally, when the sound velocities in a liquid are around $1000\text{--}1500\text{ m s}^{-1}$ the power ultrasound (in opposition to diagnostic ultrasound, particularly used in medical imaging) can oscillate from approximately 10 to 10^{-4} cm over the frequency range of $20\text{--}2000\text{ kHz}$ [21, 22]. The compression and expansion waves put the liquid under dynamic tensile stress. As a result, the local pressure decreases adequately below the saturated vapor pressure and initiate cavitation [21, 27]. Microbubbles present in a liquid absorb energy from ultrasound waves and undergo a rapid overgrowth leading to violent collapse. The final stage of implosion is almost adiabatic and provides extreme conditions [21, 28].

2.1 Homogeneous and Heterogeneous Sonochemical Systems

Sonochemical reactions can be classified into three categories, namely homogeneous sonochemistry of liquids, heterogeneous sonochemistry of liquid–liquid or liquid–solid systems, and sonocatalysis (which involves the aforementioned systems) (Fig. 4) [29, 30]. Homogeneous systems include radical reactions, which are accelerated by sonication and that follow via radical or radical-ion intermediates [32]. In this case, the chemical bonds are broken under the high temperature and pressure generated during cavitation [24]. The short-lived chemical species are turned back to the bulk liquid and react with other species [32]. Sometimes homogeneous sonochemistry followed by secondary reactions taking place in the liquid, especially in the case of compounds of low volatility, which can interact with

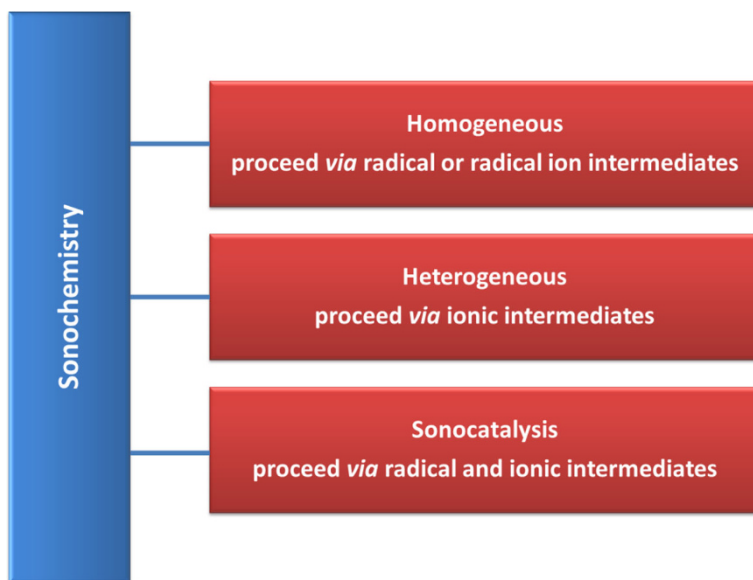


Fig. 4 Classification of sonochemistry reactions

radical species produced from solvent sonolysis [33]. In homogeneous systems, where the surroundings are uniform, the cavity remains spherical. Cavity collapse in heterogeneous system may proceed via two fundamentally different mechanisms such as microjet impact and shock wave damage. Deformation in the cavity is caused by asymmetric motions of the molecules in liquid during cavity collapse. The expanded bubble's potential energy is converted into kinetic energy of a high-speed liquid jet that passes through the bubble's interior and pierces the opposite bubble wall. The available energy is predominantly handed over to the accelerating jet rather than the bubble wall itself [34, 35]. High energy concentration can cause an intense damage to the boundary surface. The stress fracture on the surface can be invoked by shockwaves generated through cavity collapse in the liquid. The impingement of microjets and shockwaves form the localized erosion, which is in charge of ultrasonic cleaning and another sonochemical effects such as particle size reduction or improved mass transfer on heterogeneous reactions [24]. In heterogeneous systems, the use of ultrasound accelerates chemical reactions, drawing on mechanical effects of cavitation. The dynamics of the cavity collapse changes dramatically when cavitation takes place in a liquid nearby a solid surface [32]. The imposition of the heterogeneous and homogeneous sonochemistry includes a radical and an ionic reaction mechanism. Indeed, depending of the ultrasonic frequency (see Sect. 2.2), the sonication enhances radical formation and mechanical effects (e.g. mass transfer) [30].

2.2 More Important Parameters in Sonochemistry

The selection of ultrasonic parameters (such as frequency, acoustic power, temperature, pressure, solvent, design of reactors, etc.) is a crucial issue in order to optimize the system and thus influence efficiency of a chemical process. There are different ways to optimize these parameters depending on the target experimental outcome; they can be chosen by taking into account the data concerning studies on bubble cavitation characteristics [36]. The problem connected with cavitation distribution and quantification might be addressed by using different experimental or theoretical mapping techniques [37]. The basic aspects of each method, their applicability, pros and cons have been highlighted by Sutkar and Gogate [37, 38]. Their analysis allows one to determine the behaviour of cavitation activity regarding reactor geometry over a range of operating parameters [24]. In order to estimate mutual relation, bubble dynamics analysis has been also employed by other researchers [37, 39]. The study includes quantifying the correlation between the pressure and temperature linked with cavity implosion as a function of intensity, frequency, and initial radius of the nuclei [24].

The cavity dynamics is defined by two elements: the maximum magnitude accomplished by the cavity before implosion (that determines the pressure and temperature generating during collapse) and the lifetime of the cavity (that defines the distance travelled by the cavity from the place where it is formed) [37, 40]. Both elements are of paramount importance for the design of sonochemical reactors and should be optimized by appropriately adjusting the various geometric and operating parameters [37]. The reactor design has significant effects on the cavitation

activity, in terms of the reactor and horn tip diameters (including the ratio of both diameters) and the position of the horn tip immersed in the liquid [24, 41].

Another factor that has an influence on the cavitation is the amount of energy, which is supplied to the bulk solution. The power dissipation rate varies on the extent of temperature growth, which causes direct changes in the gas solubility and vapour pressure, generating active cavitation sites. Energy efficiency is expressed by the amount of energy dissipated into the liquid and is generally calculated by a calorimetric method (monitoring the temperature as a function of time allows to estimate the acoustic power) [24, 37].

The effect on the bubble cavitation is directly connected to the frequency of the ultrasound. We can distinguish frequencies at low range (20–80 kHz) and high range (>150 kHz) [42]. High frequency does not promote the occurrence of active cavitation, because of insufficient duration of the ultrasonic cycle, which is required for the growth, radial motion, and collapse of bubbles. The short-lived bubble can boost the concentration of free radicals and may have a higher probability to get out the cavitation site to the bulk mixture. Compared to lower frequency ultrasound, high ultrasonic frequencies produce less violent cavitation and lead to chemical effects. Low frequencies are responsible for physical effects, where rapid cavitation leading to enormous temperatures and pressures at the cavitation site [43]. It is noteworthy that physical properties of the liquid phase have also many effects on ultrasonic cavitation. Relative low volatility, viscosity, and high surface tension of liquid solvents are preferred for favoring efficient cavitation [37]. Active cavitation occurs also in heterogeneous sites in liquids such as impurities, gas microbubbles, non-volatile additives, etc. [36].

The physical and chemical effects produced by ultrasonic cavitation in a liquid phase provide extreme local conditions such as immense local heating ($\sim 5000\text{ }^{\circ}\text{C}$), pressures ($\sim 1000\text{ atm}$), and heating/cooling rates ($10^{10}\text{ }^{\circ}\text{C s}^{-1}$) [34]. Microjet streams and shock waves created by cavitation promote better energy and mass transfer, which has an impact on accelerating chemical reaction, increasing conversion, improving the yield, and enhancing the selectivity in both homogeneous and heterogeneous systems [44]. For this reason, sonochemistry has found wide applications in chemical synthesis used for the preparation of nanostructured materials (e.g. hybrid lignocellulosic materials) [45] and modification of inorganic materials (e.g. clay minerals) [46]. Additionally, the benefits of the use of ultrasound in organic synthesis are also highlighted by interesting review articles [47–49]. Some key examples where synthetically useful sonochemical organic transformations carried out in homogenous and heterogeneous conditions include: hydrolysis [50], cycloaddition (e.g. Diels–Alder reaction) [51], coupling (e.g. Suzuki reaction, Mitsunobu reaction) [47], isomerization (e.g. glucose to fructose) [52], alkylation [53], esterification [54], and polymerization reactions [55].

3 Ultrasound-Assisted Catalysis for Lignocellulosic Biomass Valorization

3.1 Principles of Sonocatalysis

The combination of sonochemistry with catalysis can be used to accomplish a number of chemical reactions with convenient workup conditions (e.g. shorter reaction times) in contrast to more conventional methods [56]. Heterogeneous reactions follow via ionic intermediates provoked by mechanical effects, whereas radical reaction enhanced mainly by sonication. In the case when radical and ionic mechanisms lead to other products, ultrasound might promote the radical reaction, which can also provide new synthetic pathways [30]. The fundamental rule of sonocatalysis is diffusion and sorption of the main components on a solid surface followed by a series of heterogeneous chemical reactions on active sites [57]. In a heterogeneous reaction system, the improvement of chemical reaction is mainly caused by physical effects. The physical phenomena improve mass transfer from turbulent mixing and acoustic streaming, generate cavitation erosion at liquid–solid interfaces, and are responsible for deformation of solid surfaces (Fig. 5) [25].

The effect of ultrasonic irradiation on a heterogeneous catalyst may cause physical and chemical modifications (e.g. changes in crystallization, dispersion, and surface properties, as well as changes on catalytic reactivity during reaction (Fig. 5) [58]. The chemical rate increases due to enhancement of external transport phenomena and the increase in temperature at the catalyst surface. Acoustic

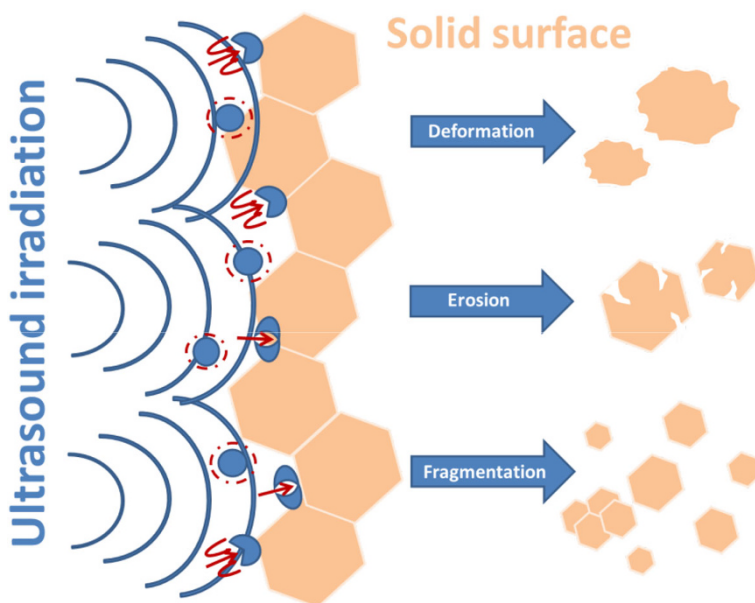


Fig. 5 Effect of ultrasound irradiation on a heterogeneous catalyst surface

cavitation can induce the breaking of the catalytic particle and gives more accessibility to the internal surface for the reagents. In the gas–liquid–solid system (e.g. hydrogenation reactions) sonication increases the interphase surface and favors the removal of outer oxide or other passivating layers from the catalyst surface [49].

3.2 Homogenous and Heterogeneous Sonocatalysis

The application of ultrasound in homogeneous and heterogeneous reaction systems in the presence of catalysts is viewed as a convenient technique for lignocellulosic valorization. Catalysis assisted by ultrasound includes a variety of reactions such as hydrolysis, hydrogenation, oxidation [59]. Sonication improves hydrolysis of lignocellulosic materials into sugars and their subsequent fermentation into bio-ethanol. The main reason for enhanced conversion is the substantial improvement of mass transfer in reacting systems, as well as the activation of chemical and biological catalysts [37]. Yunus et al. reported that the acid hydrolysis of palm oil to xylose was increased from 22 to 52% under ultrasound pretreatment (20 kHz, 2 kW), in comparison to silent conditions (Table 1; Entry 1) [60]. An improvement of the reaction rate under ultrasound (25 kHz, 600 W) was noticed also by Choi and Kim during the acid-catalyzed hydrolysis of starch (Table 1; Entry 2) [61]. Ultrasonic energy can have a direct influence on hydrolysis and fermentation reactions of cellulosic materials, while the application of ultrasound with enzymes accelerates saccharification and the fermentation rate [36]. Cavitation effects enhance the transport of enzyme macromolecules to the surface of the substrate, whereas the substrate surface is opening up to the action of enzymes due to the mechanical effect of cavitation [4, 62]. Additionally, the sono-assisted enzymatic conversion of cellulose performed in solvents such as ionic liquids (ILs) yielded high performances by promoting high conversion, yield, and selectivity [36]. The combination of ultrasound with ILs has indeed recently attracted much interest for lignocellulosic biomass valorization [36]. For example, enzymatic hydrolysis of lignocellulose assisted by ultrasound (45 kHz, 100 W) in imidazolium-based ionic liquid media improves cellulosic conversion from 75 to 95% [63] and saccharification ratio to 92% from 55% [64] in 60 min (24 kHz, 35 W). The benefits of ultrasound-assisted enzymatic processes are the enhanced solvation and the increased reactivity of biomass reactants, coupled to reactions taking place at lower temperature within shorter time and with less requirement for acid or base catalysts [36].

The nature of solvents fulfils a crucial role in the lignocellulose depolymerization process. In some cases, ionic liquids were used only selectively to dissolve lignin rather than hemicellulose or cellulose [65]. For example, the catalytic hydroprocessing of lignin under ultrasound conditions resulted in a higher efficiency when conducted in an ionic liquid (1-butyl-3-methylimidazolium acetate) in comparison to organic solvents and water. Considerable enhancement in conversion up to 90% was noticed with nano-Ni and NiO nanosheets catalysts [66]. The conversion rate and the mass distribution of products depends on the procedure used for the pretreatment (acidic or alkali) of lignin. This means that in most cases, acidic extraction leads to a larger extent of depolymerization reaction (Table 1; Entry 3)

Table 1 Homogeneous and heterogeneous sonocatalytic biomass valorization

Entry	Process	Catalyst	Substrate	Sonochemical parameters	Experimental details	Sonocatalytic behaviour	References
1	Hydrolysis	2% sulphuric acid (aqueous solution)	Oil palm empty fruit bunch	2 kW (20 kHz)	Reaction time 15, 45, 60 min Solvent H ₂ SO ₄ concentration (2%) Temperature 25 °C	The highest yield of xylose (58%) was obtained under ultrasound irradiation (90% amplitude) during 45 min, whereas without ultrasonic pretreatment yield was equal to 22%	[60]
2	Hydrolysis	1–5% sulphuric acid (aqueous solution)	Starch Maltose Maltotriose	600 W (25 kHz)	Reaction time 100 min. Solvent dilute sulfuric acid (1–5 wt%) Temperature 90–100 °C	The reaction yield in the presence of ultrasound is higher than in the reaction without sonication (increased ~75 % at 90 °C)	[61]
3	Hydroprocessing	Fe ₃ O ₄ (NiAlO) x Fe ₃ O ₄ (NiMgAlO) x	Miscanthus (lignin, glucose, xylose, arabinose, galactose, mannose, extractives, and ash)	(35 kHz)	Reaction time: 6 h/ 24 h. Solvent: ethyl acetate/methanol/ionic liquid [BMIM]OAc Temperature room temperature/180 °C	Catalysts exhibited a slight activity whereas considerable growth in conversion (up to 90% under US irradiation) was noticed on nano-Ni (0) and NiO (111) nanosheets samples	[66]
4	Degradation	Rutile- TiO ₂ Anatase-TiO ₂ Montmorillonite Clay (MMT), ZnO and Fe ₃ O ₄	2-hydroxyethyl cellulose	100 W (24 kHz)	Reaction time 100 min Solvent water Temperature 25 °C	The sonocatalytic activity (rate constants) of nanoparticles catalysts increases in the following order: Fe ₃ O ₄ , Rutile-TiO ₂ , ZnO, Anatase-TiO ₂ , and MMT	[68]

Table 1 continued

Entry	Process	Catalyst	Substrate	Sonochemical parameters	Experimental details	Sonocatalytic behaviour	References
5	Sonophotocatalytic Degradation	TiO ₂	Chitosan	30–90 W (24 kHz)	Reaction time 60 min Solvent water Temperature: 25 °C	In 60 min (at loading catalyst: 0.1–0.6 g/L) rate constant is modified in the range of 0.354–1.134 ($\text{mol}^{1.7} \text{L}^{-1.7} \text{min}^{-1} \times 10^{-9}$) while for the sonocatalytic degradation from 1.737 to 2.654 ($\text{mol}^{1.7} \text{L}^{-1.7} \text{min} \times 10^{-9}$)	[69]
6	Hydrolysis	Hydrochloric acid	Corn starch	Not provided by the authors	Reaction time 90 min Solvent hydrochloric acid Temperature 100 °C	The optimum conditions (levulinic acid yield 23%) were achieved during first 90 min at 100 °C with acid concentration (4.5 mol/L) and the ratio of liquid: solid (15:1 mL/g)	[72]
7	Oxidation	FeCl ₃ /HNO ₃ (various Lewis acids)	A mixture of benzyl alcohols	120 W (35 kHz)	Reaction time 10–25 min Solvent acetone Temperature room temperature.	Ultrasound enhances chemical reactions and allows to obtain the complete conversion of benzyl alcohol into aldehyde during first 10 min reaction. However, continuation of the reaction over 20 min does not improve the yield (94%) and leads to other oxidized byproducts (e.g. benzoic acid)	[73]
8	Oxidation	TEMPO/NaBr/NaClO	Cotton linter pulp	300 W (40 kHz)	Reaction time 24 h Solvent water Temperature 25 °C	Ultrasonic-assisted by TEMPO oxidation allows obtain high carboxylate content (1.66 mmol/g) cellulose nanocrystals (the widths 5–10 nm; the lengths 100–400 nm)	[74]

Table 1 continued

Entry	Process	Catalyst	Substrate	Sonochemical parameters	Experimental details	Sonocatalytic behaviour	References
9	Oxidation	Au/SiO ₂	D-glucose	(35 kHz)	Reaction time 60 min Solvent: 30% hydrogen peroxide Temperature room temperature	The application of ultrasound provides high conversion (~100%) and selectivity (~80% into gluconic acid) and eliminates consequent reaction by products (fructose, mannose, glycolaldehyde, sorbitol, and maltose)	[79]
10	Hydrogenation	Raney-Ni Cu/SiO ₂ Cu/ZnO/Al ₂ O ₃	D-fructose	0–50 W	Reaction time: 120 min Solvent – Temperature 70–110 °C	In the case of Raney-Ni catalyst, reaction selectivity was slightly lower at 30 W (47%) than under silent conditions (51%) and reactions carried out with 10 W (50%) and 50 W (50%)	[80]

[66]. Additionally, work by Napoly and co-workers shows that it is possible to obtain vanillin-based monomers with yield equal to 0.51 wt% in the presence of a tungsten-based catalyst and an oxidizing agent such as H_2O_2 [67]. Na_2WO_4 acted as the most promising catalyst, which promoted an effective system, where ultrasound generated sufficient oxidation conditions (20 kHz, 11 W) and involved strengthened oxidative coupling of phenoxy radicals [67].

A relevant study about the degradation of cellulose was recently published by Taghizadeh (Table 1; Entry 4) [68]. The degradation behaviour of 2-hydroxyethyl cellulose was conducted in the presence of a variety of heterogeneous catalysts (such as titanium oxide, montmorillonite clay, zinc oxide, and iron oxide) under ultrasound irradiation (24 kHz). Sonolytic degradation (without catalyst) increases with increasing of ultrasonic power (in the range of 30–90 W); however, it is remarkably lower in comparison to the efficiency of the sonocatalytic degradation. The results obtained revealed that the combined use of catalysts and US irradiation improved the degree of cellulose depolymerization. Among all the catalysts tested, the most efficient was Fe_3O_4 , which provided a better ability for radical generation through electron transfer between the metal ion and the water molecules during the sonication process. The possibility of combining ultrasound irradiation with heterogeneous photocatalysis was also studied by the same research group (Table 1; Entry 5) [69]. The complete degradation of chitosan (with cellulose-based structure) was achieved during 1 h in the presence of titanium oxide at 24 kHz. In this case, sonophotocatalysis enhanced the production of reactive radicals as well as increasing the active sites of the catalyst surface.

Behling et al. recently investigated the low frequency (20 kHz) ultrasound-assisted aqueous-phase oxidation of vanillyl alcohol to vanillin using a heterogeneous Co_3O_4 catalyst with hydrogen peroxide as the primary oxidizing agent under mild reaction conditions (low temperature and atmospheric pressure). The outcome of this work was that the ultrasound-assisted catalytic reaction is faster (4x), more selective (2.3x), and more efficient (2.7x) than the corresponding reaction carried out under silent conditions [70]. Additionally, a large decrease of the overall energy consumption was observed under ultrasound (36 vs. 288 kJ). Moreover, from an environmental point of view, green metrics indicators such as the E factor and the process mass intensity (PMI) calculated for both activation systems clearly showed the benefit of the ultrasound-mediated reaction [70]. The ultrasound-microwave assisted process is also an interesting approach for lignocellulosic biomass valorization. The simultaneous microwave (100 W) and ultrasound irradiations was shown to improve the hydrolysis reaction rates of glucose [71] and corn starch [72] (Table 1; Entry 6) in 60 min. In both cases, the reaction yield to levulinic acid was high (49 and 23% from glucose and corn starch, respectively) in comparison with those reported in the open literature.

Kardos and Luche [42] have investigated interesting approaches to obtain high value-added chemicals through the conversion of biomass feedstocks such as polymeric carbohydrates to lower weight molecules. In the case of polysaccharides, the partial or total depolymerization has to be taken into account. Hydrolytic procedures, already mentioned before, have been widely examined to accomplish this aim. Nevertheless, particular attention should be paid to oxidation reactions. For

example, glucose being selectively oxidized into glucuronic acid in the presence of iron sulfate under ultrasound irradiation (100 kHz), whereas hexoses are oxidized to the corresponding uronic acids. It is interesting to note that this type of reaction cannot be performed without oxygen or acoustic activation [42].

The sonocatalytic oxidation of primary benzyl alcohols into the corresponding aldehydes was reported by Naik et al. [73]. They noted that the mixture of $\text{HNO}_3/\text{FeCl}_3$ provides high yields (80–94%) of aldehydes within 10–25 min (Table 1; Entry 7). Reactions carried out under silent conditions showed fourfold lower rates and yields than those performed under sonication. The application of ultrasound (35 kHz, 120 W) gave excellent yields with short reaction times and allowed to avoid over-oxidized products.

The work of Qin et al. [74] showed that the TEMPO/NaBr/NaOCl oxidation system assisted by ultrasound (40 kHz, 300 W) can be used to prepare cellulose nanocrystals with high carboxylate content from cotton linter pulp (Table 1; Entry 8). This is consistent with the study carried out by Brochette–Lemoine et al. [75]. The results of these investigations indicated that the rate of the oxidation of methyl α -D-glucopyranoside or sucrose was increased in the presence of ultrasound. Moreover, the reaction can then occur without the commonly used sodium bromide owing to the ability of ultrasound to generate the active oxidizing species during the catalytic cycle. Additionally, sonication accelerated the oxidation reaction, especially when the frequency of ultrasound was increased from 20 up to 500 kHz [76]. In order to scale up the oxidation of cellulose, Paquin et al. [77] proposed the use of a continuous flow-through system instead of the classical standard batch mode. The flow-through reactor increased the reaction rate ($\sim 36\%$) in comparison to the batch reactor while decreasing the overall energy consumption ($\sim 87\%$) [4].

Another reaction worth interest for the industry is the production of gluconic acid from D-glucose. Rinsant et al. [78] have described a way to selectively oxidize glucose via a sono-Fenton process with hydrogen peroxide in the presence of iron (II) sulfate as catalyst. In contrast to preconceived ideas, they proved that sonochemistry does not constitute an “intensive energy consuming” technology. Furthermore, the energy consumption could be minimized when ultrasound-based processes are optimized. Energy consumption (under ultrasound) was lower than that attained under conventional reactions. Remarkably high conversion ($\sim 100\%$) and selectivity ($\sim 95\%$) values were obtained only after 15 min (20 kHz, 0.25 W mL^{-1}). This example on D-glucose oxidation relies on the efficient combination of an eco-friendly oxidant (hydrogen peroxide) and ultrasound, which constitutes a promising strategy for the valorization of biomass. In the same strategy of sugar oxidation by sonocatalysis, Bujak et al. [79] observed that silica-supported gold catalysts are extremely active and selective for D-glucose oxidation to gluconic acid at ambient temperature and under ultrasound conditions (35 kHz) (Table 1; Entry 9). The application of ultrasound is of crucial importance to provide not only high conversion of glucose into gluconic acid with 100% yield, but also high reproducibility.

The effect of sonication (26, 78 and 130 W cm^{-2}) on D-fructose hydrogenation in the presence of heterogeneous catalysts was examined by Toukoniitty et al. [80]. The reaction rate and selectivity were investigated at various conditions of

temperature (70–110 °C), pressure (10, 30, and 50 bar), and ultrasonic power (0–50 W) (Table 1; Entry 10). The application of sonication during the hydrogenation reaction considerably accelerated the reaction rate in the presence of the Cu/SiO₂ catalyst. High temperature and pressure had a moderate effect on the catalyst activity whereas the variation of nominal ultrasonic power input effectively improved the reaction rates.

4 Challenges and Future Perspectives

In most cases, combining catalysis with sonication has interesting effects on reactions course. In the present mini-review, we have shown that the use of sonocatalysis allows avoiding harsh chemical conditions, along with reducing reaction times and improving heat and mass transfer, thereby increasing chemical rate constants, yields, and selectivities. Hence, the ultrasound-assisted catalysis can be successfully applied for the pretreatment and chemical conversion of lignocellulosic biomass and its derivatives in a variety of processes such as hydrolysis, oxidation, and hydrogenation reactions. The recent studies on the use of ultrasound to assist catalytic reactions have clearly shown great advantages and technological potential of this concept for the chemical industry, especially when thinking about processes under flow. More significant scientific breakthroughs for biomass valorization are expected to occur in this innovative field in the near future. Last, but not least, and continuing in the same lines, the important role of ultrasound on photocatalysis (ultrasound and photocatalysis together) for the valorization of lignocellulosic biomass and its derivatives might be also a promising research avenue worth broad interest in the huge spectrum of possibilities offered by lignocellulose-based processes, for instance, sonophotocatalytic proof concepts for: lignocellulosic biomass depolymerization [81], biohydrogen [82], and biomethane production [83].

Acknowledgements Prof. Dr. Colmenares would like to thank the National Science Centre (Poland) for the support within the project Sonata Bis Nr. 2015/18/E/ST5/00306 and the support from COST Action FP1306 for networking and possibilities for meetings and future students exchange. M.Sc. Kuna would like to acknowledge the COST Association (Action FP1306) for the Trainee Grant (COST-STSM-ECOST-STSM-FP1306-010216-068720). Ronan Behling acknowledges the CAPES Foundation (Brazilian Ministry of Education) for awarding his PhD scholarship (13342-13-4) through the Science without Borders program.

Open Access This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

References

1. Perlack RD, Wright LL, Turhollow AF, Graham RL, Stokes BJ, Erbach DC (2015) Biomass as feedstock for a bioenergy and bioproducts industry: The technical feasibility of a billion-ton annual

- supply. https://www1.eere.energy.gov/bioenergy/pdfs/final_billionton_vision_report2.pdf. Accessed April 2015
- United Nations Environmental Programme Division of Technology, Industry and economics International Environmental Technology Centre Osaka/Shiga J. Converting Waste Agricultural Biomass into a Resource. United Nations Environ. Program. (2009) Japan http://www.unep.org/ietc/Portals/136/Publications/Waste%20Management/WasteAgriculturalBiomassEST_Compendium.pdf. Accessed July 2009
 - Briens C, Piskorz J, Berruti F (2008) Biomass valorization for fuel and chemicals production. A review. *Int J Chem React Eng* 6:1542–6580
 - Chatel G, De Oliveira Vigier K, Jérôme F (2014) Sonochemistry: what potential for conversion of lignocellulosic biomass into platform chemicals? *Chemsuschem* 7:2774–2787
 - Mora-Pale M, Meli L, Doherty TV, Linhardt RJ, Dordick JS (2011) Room temperature ionic liquids as emerging solvents for the pretreatment of lignocellulosic biomass. *Biotechnol Bioeng* 6:1229–1245
 - Jönsson LJ, Alriksson B, Nilvebrant NO (2013) Bioconversion of lignocellulose: inhibitors and detoxification. *Biotechnol Biofuels* 6:16–26
 - Harmsen P, Huijgen W (2010) Literature review of physical and chemical pretreatment processes for lignocellulosic Biomass. Energy. ECN-E–10-013:1-49. <https://www.ecn.nl/docs/library/report/2010/e10013.pdf>. Accessed September 2010
 - Zakzeski J, Bruijninx PC, Jongerius AL, Weckhuysen BM (2010) The catalytic valorization of lignin for the production of renewable chemicals. *Chem Rev* 110:3552–3599
 - Silveira MHL, Morais ARC, Lopes AM, Oleksyszyn DN, Bogel-Lukasik R, Andreus R, Ramos LP (2015) Current pretreatment technologies for the development of cellulosic ethanol and biorefineries. *Chemsuschem* 8:3366–3390
 - Kumar P, Barrett DM, Delwiche MJ, Stroeve P (2010) Methods for pretreatment of lignocellulosic biomass for efficient hydrolysis and biofuel production. *Ind Eng Chem Anal Ed* 48:3713–3729
 - Brodeur G, Yau E, Badal K, Collier J, Ramachandran KB, Ramakrishnan S (2011) Chemical and physicochemical pretreatment of lignocellulosic biomass: a review. *Enzyme Res* 787532:1–17
 - Bussemaker MJ, Zhang D (2011) Effect of ultrasound on lignocellulosic biomass as a pretreatment for biorefinery and biofuel applications. *Ind Eng Chem Res* 52:3563–3580
 - Nitsos CK, Mihailof CM, Matis KA, Lappas AA, Triantafyllidis KS (2013) The role of catalytic pretreatment in biomass valorization toward fuels and chemicals. In: Triantafyllidis KS, Lappas AA, Stöcker M (eds) *The role of catalysis for the sustainable production of bio-fuels and bio-chemicals*, 1st edn. Elsevier, Amsterdam, pp 217–260
 - Akhtar N, Gupta K, Goyal D, Goyal A (2015) Recent advances in pretreatment technologies for efficient hydrolysis of lignocellulosic biomass. *Environ Prog Sustain Energy* 35:489–511
 - Gallezot P (2012) Conversion of biomass to selected chemical products. *Chem Soc Rev* 44:60–72
 - Li SH, Liu S, Colmenares JC, Xu YJ (2016) A sustainable approach for lignin valorization by heterogeneous photocatalysis. *Green Chem* 18:594–607
 - Li C, Zhao X, Wang A, Huber GW, Zhang T (2015) Catalytic Transformation of Lignin for the Production of Chemicals and Fuels. *Chem Rev* 115:11559–11624
 - Subhedar PB, Gogate PR (2016) Ultrasound assisted intensification of biodiesel production using enzymatic interesterification. *Ultrason Sonochem* 29:67–75
 - Amaniampong PN, Karam A, Trinh QT, Xu K, Hirao H, Jérôme F, Chatel G (2017) Selective and Catalyst-free Oxidation of D-Glucose to D-Glucuronic acid induced by High-Frequency Ultrasound. *Sci. Rep* 7(40650):1–8
 - Gogate PR (2011) Theory of cavitation and design aspects of cavitation reactors. In: Pankaj, Ashokkuma M (eds) *Theoretical and experimental sonochemistry involving inorganic systems*, 1st edn. Springer Netherlands, Berlin, pp 31–67
 - Xu H, Zeiger BW, Suslick KS (2013) Sonochemical synthesis of nanomaterials. *Chem Soc Rev* 42:2555–2567
 - Agarwal A, Ng WJ, Liu Y (2011) Principle and applications of microbubble and nanobubble technology for water treatment. *Chemosphere* 4:1175–1180
 - Suslick KS, McNamara WB, Didenko Y (1999) Hot spot conditions during multi-bubble cavitation. In: Crum LA, Mason TJ, Reisse J, Suslick KS (eds) *Sonochemistry and sonoluminescence*, 1st edn. Springer Netherlands, The Netherlands, pp 191–204
 - Colmenares JC (2014) Sonication-induced pathways in the synthesis of light-active catalysts for photocatalytic oxidation of organic contaminants. *Chemsuschem* 7:1512–1527

25. Suslick KS (1997) Sonoluminescence and sonochemistry. In: IEEE Ultrason. Symp. Proceedings. An Int. Symp. (Cat. No.97CH36118) 1. doi:[10.1109/ULTSYM.1997.663076](https://doi.org/10.1109/ULTSYM.1997.663076)
26. Hagenson LC, Doraiswamy LK (1998) Comparison of the effects of ultrasound and mechanical agitation on a reacting solid-liquid system. *Chem Eng Sci* 53:131–148
27. Hickel S (2013) DNS and LES of two-phase flows with cavitation. Direct and Large-Eddy Simulation IX 1st edn, Springer International Publishing, Dresden, Germany, pp 1–28
28. Lorimer JP, Mason TJ (1987) Sonochemistry. Part 1-The physical aspects. *Chem Soc Rev* 16:239–274
29. Price G (1997) Sonochemistry and sonoluminescence. *Sonochem, Ultrason.* doi:[10.1016/S1350-4177\(97\)85630-1](https://doi.org/10.1016/S1350-4177(97)85630-1)
30. Mason TJ (1997) Ultrasound in synthetic organic chemistry. *Chem Soc Rev* 26:443–451
31. Cella R (2012) Ultrasound in synthetic applications and organic chemistry. In: Chen D, Sharma SK, Mudhoo A (ed) *Handbook on applications of ultrasound: sonochemistry for sustainability*, 1st edn. Taylor & Francis Group LLC, Boca Raton, FL, p 263–277
32. Cella R, Stefani H (2009) Ultrasound in heterocycles chemistry. *Tetrahedron* 65:2619–2641
33. Hussein EM, Khairou KS (2014) Sonochemistry: synthesis of bioactive heterocycles. *Rev J Chem* 4:221–251
34. Suslick KS (2001) Encyclopedia of physical science and technology. In: Meyers RA (ed) *Sonoluminescence and sonochemistry*, 3rd edn. Elsevier Science Ltd, Massachusetts, pp 1–20
35. Suslick KS (2005) Sonochemistry. Van Nostrand's encyclopedia of chemistry. John Wiley & Sons. Doi: [10.1002/0471740039.vec2346](https://doi.org/10.1002/0471740039.vec2346)
36. Luo J, Fang Z, Smith RL (2014) Ultrasound-enhanced conversion of biomass to biofuels. *Prog Energy Combust Sci* 41:56–93
37. Gogate PR, Sutkar VS, Pandit AB (2011) Sonochemical reactors: important design and scale up considerations with a special emphasis on heterogeneous systems. *Chem Eng J* 166:1066–1082
38. Sutkar VS, Gogate PR (2009) Design aspects of sonochemical reactors: techniques for understanding cavitation activity distribution and effect of operating parameters. *Chem Eng J* 155:26–36
39. Flannigan DJ, Suslick KS (2005) Plasma formation and temperature measurement during single-bubble cavitation. *Nature* 434:52–55
40. Gogate PR, Pandit AB (2015) Design and scale-up of sonochemical reactors for food processing and other applications. In: Graff KF, Gallego-Juárez JA (eds) *Power ultrasonics*, Elsevier Ltd, Kidlington, UK, pp 725–755
41. Gogate PR, Pandit AB (2011) Cavitation Generation and usage without ultrasound: hydrodynamic cavitation. In: Pankaj, Ashokkuma M (eds) *Theoretical and experimental sonochemistry involving inorganic systems*, Springer, Netherlands, Berlin, pp 69–106
42. Kardos N, Luche JL (2001) Sonochemistry of carbohydrate compounds. *Carbohydr Res* 332:115–131
43. Thompson L, Doraiswamy L (1999) Sonochemistry: science and engineering. *Ind Eng Chem Res* 38:1215–1249
44. Saito S (2015) Ultrasound field and bubbles. In: Grieser F, Choi PK, Enomoto N, Harada H, Okitsu K, Yasu K (eds) *Sonochemistry and the acoustic bubble*, 1st edn. Elsevier, Amsterdam, pp 11–39
45. Dong YY, Li SM, Ma MG, Zhao JJ, Sun RC, Wang SP (2014) Environmentally-friendly sonochemistry synthesis of hybrids from lignocelluloses and silver. *Carbohydr Polym* 102:445–452
46. Chatel G, Novikova L, Petit S (2016) How efficiently combine sonochemistry and clay science? *Appl Clay Sci* 119:193–201
47. Baig RBN, Varma RS (2012) Alternative energy input: mechanochemical, microwave and ultrasound-assisted organic synthesis. *Chem Soc Rev* 41:1559–1584
48. Cravotto G, Cintas P (2006) Power ultrasound in organic synthesis: moving cavitation chemistry from academia to innovative and large-scale applications. *Chem Soc Rev* 35:180–196
49. Luche JL (2013) *Synthetic organic sonochemistry*, 1st edn. Springer, US, New-York, pp 246–250
50. Piiskop S, Hagu H, Jarv J, Salmar S, Tuulmets A (2007) Sonification effects on ester hydrolysis in alcohol-water mixtures. *Proc Est Acad Sci Chem* 56:196–206
51. Javed T, Mason TJ, Phull SS, Baker NR, Robertson A (1995) Influence of ultrasound on the Diels-Alder cyclization reaction: synthesis of some hydroquinone derivatives and Ionapalene, an antiprosoriatic agent. *Ultrason Sonochem* 2:S3–S4
52. Wang Y, Pan Y, Zhang Z, Sun R, Fang X, Yu D (2012) Combination use of ultrasound irradiation and ionic liquid in enzymatic isomerization of glucose to fructose. *Process Biochem* 47:976–982
53. Hofmann J, Freier U, Weeks M (2003) Ultrasound promoted C-alkylation of benzyl cyanide - Effect of reactor and ultrasound parameters. *Ultrason Sonochem* 10:271–275

54. Grönroos A, Aittokallio N, Kolehmainen E (2004) Ultrasound accelerated esterification of bile acids. *Ultrason Sonochem* 11:161–165
55. Paulusse MJM, Sijbesma RP (2006) Ultrasound in polymer chemistry: revival of an established technique. *J Polym Sci Part A Polym Chem* 44:5445–5452
56. Gawande MB, Bonifácio VDB, Luque R, Branco PS, Varma RS (2014) Solvent-free and catalysts-free chemistry: a benign pathway to sustainability. *ChemSuschem* 7:24–44
57. Ince NH, Ziyilan A (2015) Single and hybrid applications of ultrasound for decolorization and degradation of textile dye residuals in water. In: Sharma SK (ed) *Green chemistry for dyes removal from waste water*, Wiley, Hoboken, NJ, USA, pp 261–263
58. Suslick K, Skrabalak S (2008) Sonocatalysis. In: Ertl G, Knozinger H, Schuth F, Weitkamp J (eds) *Handbook of heterogeneous catalysis*, 2nd edn. Wiley-VCH, Weinheim, pp 2006–2017
59. Bonrath W (2005) Ultrasound supported catalysis. *Ultrason Sonochem* 12:103–106
60. Yunus R, Salleh SF, Abdullah N, Biak DRA (2010) Effect of ultrasonic pre-treatment on low temperature acid hydrolysis of oil palm empty fruit bunch. *Bioresour Technol* 101:9792–9796
61. Choi J, Kim S (1994) Effect of ultrasound on sulfuric acid-catalysed hydrolysis of starch. *Korean J Chem Eng* 11:178–184
62. Yachmenev G, Condon BD, Lambert AH (2007) Intensification of enzymatic reactions in heterogeneous systems by low intensity, uniform sonication: new oad to “Green Chemistry”. In: Eggleston G, Vercellotti JR (eds) *Industrial application of enzymes on carbohydrate-based materials*, 1st edn. American Chemical Society, Washington, pp 137–156
63. Yang F, Li L, Li Q, Tan W, Liu W, Xian M (2010) Enhancement of enzymatic in situ saccharification of cellulose in aqueous-ionic liquid media by ultrasonic intensification. *Carbohydr Polym* 81:311–316
64. Ninomiya K, Ohta A, Omote S, Ogino C, Takahashi K, Shimizu N (2013) Combined use of completely bio-derived cholinium ionic liquids and ultrasound irradiation for the pretreatment of lignocellulosic material to enhance enzymatic saccharification. *Chem Eng J* 215–216:811–818
65. Chatel G, Rogers RD (2014) Review: oxidation of lignin using ionic liquids—an innovative strategy to produce renewable chemicals. *ACS Sustain Chem Eng* 2:322–339
66. Finch KBH, Richards RM, Richel A, Medvedovici AV, Gheorghe NG, Verziu M, Coman SM, Parvulescu VI (2012) Catalytic hydroprocessing of lignin under thermal and ultrasound conditions. *Catal Today* 196:3–10
67. Napoly F, Kardos N, Jean-Gérard L, Goux-Henry C, Andrioletti B, Draye M (2015) H₂O₂-mediated kraft lignin oxidation with readily available metal salts: what about the effect of ultrasound? *Ind Eng Chem Res* 54:6046–6051
68. Taghizadeh MT, Seifi-Aghjekohal P (2015) Sonocatalytic degradation of 2-Hydroxyethyl Cellulose in the presence of some nanoparticles. *Ultrason Sonochem* 26:265–272
69. Taghizadeh MT, Abdollahi R (2011) Sonolytic, sonocatalytic and sonophotocatalytic degradation of chitosan in the presence of TiO₂ nanoparticles. *Ultrason Sonochem* 18:149–157
70. Behling R, Chatel G, Valange S (2017) Sonochemical oxidation of vanillyl alcohol to vanillin in the presence of a cobalt oxide catalyst under mild conditions. *Ultrason Sonochem* 36:27–35
71. Li G, Li L, Liu L, Lai Y, Li W, Kong H (2012) Study on preparation of levulinic acid by hydrolysis of glucose using ultrasound-microwave assisted hydrochloric acid. *Chem Bioeng* 2012:5–7
72. Zhou K, Qian H, Zhoun H, Zhu K (2008) Study on technology of ultrasound-microwave assisted generates levulinic acid by hydrolysis of corn starch. *Sci Technol Food Ind* 29:243–246
73. Naik R, Nizam A, Siddekha A, Pasha MA (2011) An efficient sonochemical oxidation of benzyl alcohols into benzaldehydes by FeCl₃/HNO₃ in acetone. *Ultrason Sonochem* 18:1124–1127
74. Qin ZYY, Tong GLL, Chin YCF, Zhou JCC, Frank Chin YC, Zhou JCC (2011) Preparation of ultrasonic-assisted high carboxylate content cellulose nanocrystals by tempo oxidation. *BioResources* 6:1136–1146
75. Brochette-Lemoine S, Trombotto S, Joannard D, Descotes G, Bouchu A, Queneau Y (2000) Ultrasound in carbohydrate chemistry: sonophysical glucose oligomerisation and sonocatalysed sucrose oxidation. *Ultrason Sonochem* 7:157–161
76. Lemoine S, Thomazeau C, Joannard D, Trombotto S, Descotes G, Bouchu A, Queneau Y (2000) Sucrose tricarboxylate by sonocatalysed TEMPO-mediated oxidation. *Carbohydr Res* 326:176–184
77. Paquin M, Loranger É, Hannaux V, Chabot B, Daneault C (2013) The use of Weissler method for scale-up a Kraft pulp oxidation by TEMPO-mediated system from a batch mode to a continuous flow-through sonoreactor. *Ultrason Sonochem* 20:103–108

78. Rinsant D, Chatel G, Jérôme F (2014) Efficient and selective oxidation of D-Glucose into Gluconic acid under low-frequency ultrasonic irradiation. *Chem Cat Chem* 6:3355–3559
79. Bujak P, Bartczak P, Polanski J (2012) Highly efficient room-temperature oxidation of cyclohexene and D-glucose over nanogold Au/SiO₂ in water. *J Catal* 295:15–21
80. Toukoniitty B, Kuusisto J, Mikkola J, Salmi T, Murzin DY (2005) Effect of ultrasound on catalytic hydrogenation of D-Fructose to D-Mannitol. *Ind Eng Chem Res* 44:9370–9375
81. Ninomiya K, Takamatsu H, Onishi A, Takahashi K, Shimizu N (2013) Ultrason Sonochem 20:1092–1097
82. Penconi M, Rossi F, Ortica F, Elisei F, Gentili PL (2015) Hydrogen Production from Water by Photolysis, Sonolysis and Sonophotolysis with Solid Solutions of Rare Earth, Gallium and Indium Oxides as Heterogeneous Catalysts. *Sustainability* 7:9310–9325
83. Jafari O, Zilouei H (2016) Enhanced biohydrogen and subsequent biomethane production from sugarcane bagasse using nano-titanium dioxide pretreatment. *Bioresour Technol* 214:670–678



Waste Printed Circuit Board (PCB) Recycling Techniques

Chao Ning¹ · Carol Sze Ki Lin² · David Chi Wai Hui¹ · Gordon McKay^{1,3}

Received: 3 September 2016 / Accepted: 31 January 2017 / Published online: 28 March 2017
© Springer International Publishing Switzerland 2017

Abstract With the development of technologies and the change of consumer attitudes, the amount of waste electrical and electronic equipment (WEEE) is increasing annually. As the core part of WEEE, the waste printed circuit board (WPCB) is a dangerous waste but at the same time a rich resource for various kinds of materials. In this work, various WPCB treatment methods as well as WPCB recycling techniques divided into direct treatment (landfill and incineration), primitive recycling technology (pyrometallurgy, hydrometallurgy, biometallurgy and primitive full recovery of NMF-non metallic fraction), and advanced recycling technology (mechanical separation, direct use and modification of NMF) are reviewed and analyzed based on their advantages and disadvantages. Also, the evaluation criteria are discussed including economic, environmental, and gate-to-market ability. This review indicates the future research direction of WPCB recycling should focus on a combination of several techniques or in series recycling to maximize the benefits of process.

Keywords Waste printed circuit board · Recycling techniques · Pyrometallurgy · Hydrometallurgy · Mechanic separation · Performance evaluation

Chapter 2 was originally published as Ning, C., Lin, C. S. K., Hui, D. C. W. & McKay, G. Top Curr Chem (Z) (2017) 375: 43. DOI 10.1007/s41061-017-0118-7.

✉ Gordon McKay
gmckay@qf.org.qa

- ¹ Chemical and Biomolecular Engineering Department, The Hong Kong University of Science and Technology, Hong Kong SAR, Hong Kong
- ² School of Energy and Environment, The City University of Hong Kong, Tat Chee Avenue, Hong Kong SAR, Hong Kong
- ³ College of Science and Engineering, Hamad bin Khalifa University, Education City, Qatar Foundation, Doha, Qatar

Abbreviations

EEE	Electrical and electronic equipment
WEEE	Waste electrical and electronic equipment
PCB	Printed circuit board
WPCB	Waste printed circuit board
MF	Metallic fraction of printed circuit board or waste printed circuit board
NMF	Non-metallic fraction of printed circuit board or waste printed circuit board

1 Introduction

Electrical and electronic equipment items (EEE) including MP3, cell phones, and tablets have been the indispensable necessity of peoples' daily lives while past decades have witnessed the rapid growth of EEE manufacturing industries. Currently, the production rate of EEE is estimated to be between 8.3 and 9.1 million tons per year in 2005 with an increasingly rapid growth rate due to technology updates, making it the dominant manufacturing industry in the world [1, 2]. The rapid development of EEE has given rise to the blooming of the printed circuit board manufacturing industry, which produces the core components of electrical and electronic equipment [3, 4]. Meanwhile, the accelerating upgrading of these industries also shortens the life span of EEE from around 5 years to as short as 2 or 3 years [5, 6]. This is an accelerating process, with an annual rate of 3–5% according to an EU report in 2000 [7]. Consequently, it is not difficult to realize the fact that the amount of waste electrical and electronic equipment (WEEE), as the result of EEE jettisoning, is increasing at an overwhelming rate. It is estimated that currently the amount of WEEE production is nearly 45 million tons yearly worldwide with an annual growth rate of 7–10% [8].

The printed circuit board (PCB) is considered to be the core part in most kinds of EEE (see Table 1). It is estimated that global production of printed circuit boards (PCBs) was around \$50 billion in 2010 and reached nearly \$60 billion in 2012 with a market growth rate of 1.7% [10, 11]. However, the mass disposal of WEEE generates a huge stream of waste printed circuited board (WPCB) into municipal solid waste, which was produced in large amounts which increase significantly every year (Fig. 1). Although WPCB only occupies a small portion around 3–6% of

Table 1 Main components of typical WEEE [9]

Typical WEEE	Main components
Refrigerator	Tubes, liners, condenser, wires, refrigerant
Air conditioner	Heat exchanger, motor, compressor, copper pipe, PCBs, wires, refrigerant
Washer	Tub, drain hose, motor, wires, salt waste
Television	Deflection yoke, demagnetized coil, speaker, PCBs, wires, CRT, LCD
Computer	Speaker, battery, storage medium, PCBs, wires, CRT, LCD
Printer/duplicator	Roller, toner, PCBs, wires, toner cartridge

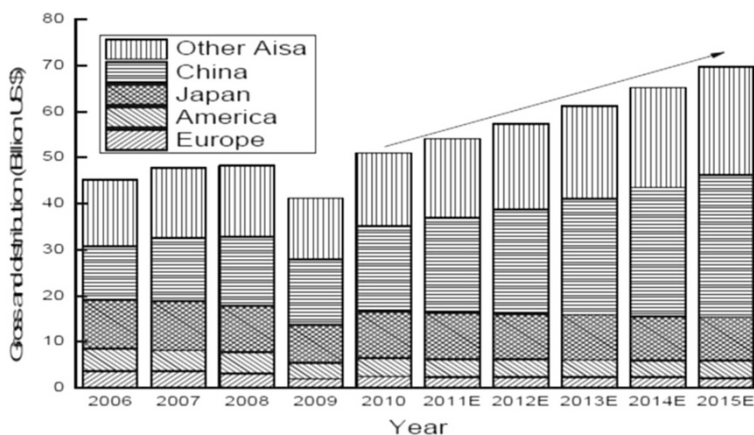


Fig. 1 PCBs increasing based on the global gross [11]

the total WEEE generated worldwide, the immense total WEEE amount still made it considerable [8, 12]. WPCB can be either directly treated, which includes landfill and incineration, or the recycling of WPCB by various kinds of technologies is also an alternative [13–18]. Compared to direct treatments, recycling is more favorable due to both environmental and economical consideration given the enrichment of materials in WPCB. It is regarded as a secondary resource since the concentration of precious metals, organic resins, or polymers in WPCB is normally ten times higher than rich non-renewable are (sometimes even hundred times higher) [19]. Therefore, recycling is not simply reduction of waste but the reuse of resources with better economic feasibility and less environmental impact.

The USEPA (United States Environmental Protection Agency) has identified seven major benefits when scrap iron and steel are used instead of virgin materials (Table 2). Using recycled materials in place of virgin materials results in significant energy savings (see Table 3 [20]). Also, the European Commission launched the 2002/96/EC Directive, known as the WEEE Directive, which came into effect on February 13, 2003, with the aim of achieving up to 70–80% recovery of electrical and electronic equipment [15]. Therefore, recycling is not only for the purpose of resource refining, more importantly, it can reduce the toxic pollution emitted in the initial manufacturing process, which will make a significant benefit difference in remediation costs.

Current recycling methods includes pyrometallurgy and hydrometallurgy, which have a long history and wide application [21–23]. Biometallurgy as an emerging technology also takes up a certain share of the WPCB recycling market [24–26]. Many studies have been done to improve the performance or cut the cost of these techniques. However, the inherent drawbacks are very obvious for these techniques, including the irritation to the environmental intensive energy consumption. Therefore, new advanced technologies are in great demand due to the requirement of technology with high safety and economic feasibility. Mechanical separation was developed due to the requirement for a high-purity metallic fraction of WPCB (MF)

Table 2 Recycled materials energy savings over virgin materials

Materials	Energy savings (%)
Aluminum	95
Copper	85
Iron and steel	74
Lead	65
Zinc	60
Paper	64
Plastics	>80

Table 3 Benefits of using scrap iron and steel

Benefits	Percentage
Saving in energy	74
Saving in virgin materials use	90
Reduction in air pollution	86
Reduction in water use	40
Reduction in water pollution	76
Reduction in mining wastes	97
Reduction in consumer wastes generated	105

and it can achieve good separation performance for real-use applications [27–30]. Recently, the use of the non-metallic fraction (NMF), which was forgotten in the past, is becoming the concern of researches including both the direct use or the modification of NMF [31–35].

However, a unanimous blind spot among the majority of works is the environmental emission analysis, which is a very serious problem derived from WPCB treatment. Several studies have been done on the evaluation of the emissions or discharge [5, 15]. Common pollutants generated from WPCB treatment or recycling include heavy metals, secondary particulates, PBDD/Fs, and PCDD/Fs, which have been studied and their toxicities are regarded as obstacles to WPCB recycling. However, emissions with lower toxicity, especially bromide in the form of hydrogen bromide or bromide, did not receive adequate attention. Despite the relatively low harm these emissions possess compared to dioxin-like organic compounds or heavy metals, the jeopardy they show is still a significant threat to human health that requires detailed studies and further treatment. Moreover, the complexity of WPCB's composition creates the scenario that specific analysis targeting certain pollutants is available while an overall review of emissions impact is still absent. Therefore, this overall emission impact study and strategy needs more effort.

Other than the discussion of emission, another issue mentioned previously is concerned with the techniques that focus mainly on general WEEE treatment methods. Nevertheless, WPCB shares several similarities with WEEE in terms of composition and chemical characteristics, the minor differences between them still requiring the development of better process techniques for WPCB treatment [36–38]. The common composition of EEE is shown in Table 4 while the detailed

Table 4 Main materials found in EEE [39]

Material	Percentage
Ferrous	98
Non-ferrous	28
Plastics	19
Glass	4
Wood	1
Other	10

discussion of WPCB will be presented in a later section. Therefore, the techniques for WEEE can be applied to WPCB but may not acquire ultimate efficiency. Actually, compared with WEEE, the composition of WPCB is more or less more consistent, since the outer casing for WEEE varies with different kinds of EEE, for example, the refrigerator or television while most WPCB has no relationship with the outer casing, making WPCB simpler for treatment or recycling. Thus, the specific design and analysis for WPCB treatment or recycling is indispensable in order to obtain the maximum sustainable environmental and economical benefits.

Herein, the lack of a summary on current techniques due to the upgrading of techniques as well as the absence of systematic emission analysis claims that an overall review of this field is imperative. Also, with the development of technologies, the overlapping of chemical, mechanical and physical treatments is very obvious, thus a new criteria is necessary for sorting and evaluating the interdisciplinary recycling and treatment techniques. In this work, the treatment and recycling techniques of WPCB are categorized according to their recovery rate and both existing and emerging techniques are reviewed and discussed. The performance of WPCB recycling techniques is evaluated from both an economic and environmental perspective. Moreover, the concept of “gate to market ability” is introduced for a more profound understanding of the feasibility of WPCB recycling techniques.

2 Characterization of WPCB

The composition of WPCB varies, since the source, components, and manufacturing processes of the WPCB maybe very different [40]. Generally, the composition of currently used PCBs is classified as glass fiber reinforced epoxyresin (FR-4), which is normally used for small electronic equipment or a paper laminated phenol is resin (FR-2) used in home appliances [41, 42]. Also, during the manufacturing process, carbonaceous compounds including brominated flame retardants and dyes are added in order to improve the flame resistance and visual recognition ability. In Table 5, it is obvious that WPCB mainly consists of MF and NMF. It is generally accepted that WPCB contains around 30% metallic fraction and 70% non-metallic fraction by weight [43, 44]. However, what needs to be clarified is that the percentage of noble metals in WPCB has been decreasing in recent years with the upgrading of technologies [45].

It is widely accepted that WPCB is comprised of a heterogeneous mixture [39, 46–48]. The heterogeneity originates from two aspects, which are the

Table 5 Composition of a populated PCB [36]

Components of WPCB	Percentage
Non-metal (e.g., epoxy resin, glass, etc.)	>70
Copper	~ 16
Solder	~ 4
Iron, ferrite (from transformer cores)	~ 3
Nickel	~ 2
Silver	0.05
Gold	0.03
Palladium	0.01
Other (bismuth, antimony, tantalum, etc.)	<0.01

heterogeneity of different PCB brands including the use of cellulose paper reinforced phenolic resin or glass fiber reinforced epoxy resin and heterogeneity in the morphology of a PCB due to the presence of metal plating [49]. However, if an adequate amount of WPCB is collected and pulverized into fine powder, empirically rules of the composition of WPCB can still be identified by comparing them globally. This is the so-called “pseudo-homogenous” effect, which means that the individual composition of a certain WPCB item will vary from others, while the bulk composition of all WPCB items will still share similarities, as shown in Table 6.

Generally, the uncertainty of WPCB composition hampers the systematic treatment or recycling of WPCB, since the complexity of it interferes with each component [59]. Therefore, pulverization is a very important pretreatment part for mixed WPCB recycling and treatment techniques since the higher pseudo-homogeneity is more favorable for easier application in overall treatment.


3 Direct treatment methods—landfill and incineration

The types of technologies for WPCB recycling are increasing with the development of research and thus the old category for technologies sorting is no longer applicable. Some processes divide the technologies to thermal or non-thermal, or

Table 6 Materials composition of several common used printed circuit boards

Metals/Ref.	[15]	[50]	[51]	[52]	[53]	[54]	[55]	[56]	[57]	[58]
Cu/%	36.4	16.0	33.87	18.29	19.187	32.5	19.60	31.95	26.8	19.19
Au/%	–	0.025	0.0007	0.011	0.013	0.004	–	–	0.008	0.007
Ag/%	–	0.100	0.04	0.018	0.0704	0.3	0.0034	0.34	0.33	0.01
Al/%	8.7	5.0	2.57	–	4.011	3.7	2.34	11.11	4.7	7.06
Pb/%	3.8	2.0	4.96	2.31	0.385	–	0.30	2.41	–	1.01
Pd/%	–	0.010	0.0012	–	0.0028	–	0.0016	–	–	–
Sn/%	4.6	3.0	0.153	3.92	0.689	0.9	0.17	1.78	1.0	2.03
Cd/%	–	–	0.00002	–	–	–	–	–	0.015	–
Total	53.5	33.14	41.59	24.55	24.36	37.40	22.42	47.59	32.85	29.31

Fig. 2 Hierarchy figure of the WPCB treatment and recycling techniques

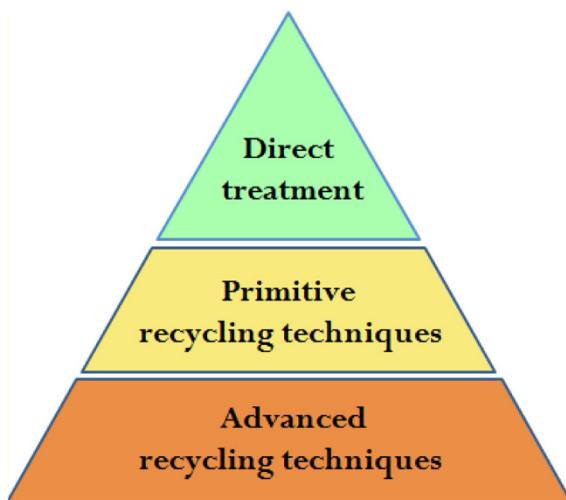

some divide into chemical treatment or mechanical treatment, others divide them by the atmosphere of the reaction or some divide them into hydrometallurgical processing or pyrometallurgical processing [16, 60, 61]. In this review, the treatment and recycling techniques for WPCB are classified according to their recovery degree (Fig. 2). Direct treatment including landfilling and incineration means that no or only the energy of WPCB was recovered while primitive recycling means the simple recycling of MF, while the NMF ended up in disposal or limited non-hazardous treatment. Advanced recycling includes two parts: separation methods without damage to the NMF and the direct use or modification of NMF. It is highly convincing that this classification can better describe the current situation of WPCB recycling and provide a basis for an overall treatment perspective instead of focusing on only one or two areas.

3.1 Landfill

Landfill is a WPCB treatment method with a long history and wide application worldwide because of simplicity in operation. However, the land for WPCB disposal is thereby regarded as wasteland and normally incapable of being exploited again in predictable decades, which is not suitable for countries/communities where there is a lack of land space. In addition, the environmental issues aroused by WPCB landfilling such as the leachate formation in landfill sites and evaporation of hazardous substances raise safety concerns. It is reported that almost 70% of the heavy metal in landfill sites come directly from WEEE, which indicates that a considerable part of heavy metals actually come from WPCB [62]. Concurrently, the co-landfilling of WPCB with various kinds of municipal solid waste makes the formation of leachate containing brominated toxic compounds and heavy metals possible due to the reactions during the landfilling process [13, 14]. The synergic pollution will contaminate the atmosphere, soil, and ground water, and this has been proven by several research groups.

Heavy metals including lead and mercury are identified in landfill sites. Lindberg et al. identified total gaseous mercury (TGM), monomethyl mercury (MMM), and dimethyl mercury (DMM) in the landfill gas in Florida, USA [63]. The results show that the mean concentration of TGM is 7190 ng/m^3 and MMM is 6 ng/m^3 . It should be emphasized that DMM, a form of extremely toxic organic mercury, was also observed in landfill gas with a concentration of 30 ng/m^3 . Spalvins et al. also identified lead in the leachate in landfill sites with a concentration of $0.007\text{--}0.066 \text{ mg/l}$ [64]. Other than heavy metals, PCDE(polychlorinated diphenyl ethers)/PBDE(polybrominated diphenyl ethers) were also discovered in landfill sites by Osako et al. [65]. Samples from seven different landfill sites in Japan were collected and analyzed. Landfill sites in operation or closure within 1 year show the presence of several kinds of hazardous compounds, especially obvious is the higher concentration of brominated flame retardants and the derivatives. TBBPA with concentration from n.d. to $620,000 \text{ pg/l}$ and PBDE-47, -99, and -100 with the total concentration from n.d. to 4000 pg/l were detected in the raw leachate from different landfill sites. More dangerously, the hazards of landfill leachate and gas are not only limited to the landfill site because they will propagate through aquatic systems or rain fall and cause the spread of contamination. Wong et al. found that even in the downstream of the small-scale landfill site of a Chinese processing village, a certain amount of metals can still be detected including Cd (n.d. to 10.3 mg/kg), Cu ($17.0\text{--}4540 \text{ mg/kg}$), Ni ($12.4\text{--}543 \text{ mg/kg}$), Pb ($28.6\text{--}590 \text{ mg/kg}$), and Zn ($51.3\text{--}324 \text{ mg/kg}$) [66]. This indicates the possibility of toxic substance migration, which makes the condition of landfill sites much worse.

It summary, landfilling is currently considered an improper way to treat WPCB due to the environmental concerns it brings about, and actually the function of it is to use land resources to remedy hazardous WPCB, which is a waste of resources for both soil and WPCB. Therefore, stricter policies and regulations have been imposed on simply landfill WPCB in many countries and more environmental benign treatment methods are required [67–71].

3.2 Incineration

Incineration means the combustion of WPCB by converting its calorific value to energy and emitting the gas directly or after treatment with the purpose mainly to remove the non-metallic fraction part (around 70 wt%) [72, 73]. It has the advantages of significantly reducing the volume of WPCB by 50%, and also the calorific value of WPCB is relatively high compared to municipal solid waste, which is around $9.9 \times 10^4 \text{ kJ/kg}$ [15, 16]. Therefore, it readily satisfies the minimum incineration calorific value for waste, which is roughly 5000 kJ/kg . Currently in the world, incineration is still widely used in American, Asia, and Europe due to the simplicity of the process. However, during the combustion of WPCB, toxic emissions including heavy metals, fly ash, polychlorinated dibenzo-*p*-dioxins/polychlorinated dibenzofurans (PCDD/Fs) and polybrominated dibenzo-*p*-dioxins and dibenzofurans (PBDD/Fs) are released into the atmosphere in the absence of post-purification [74, 75]. Cadmium, copper, nickel, lead, and zinc will be vaporized according to the order of their melting points and released into the

atmosphere [76]. Unfortunately, incineration is an ideal place for the formation of PCDD/Fs and PBDD/Fs due to the presence of halogens and an oxidizing atmosphere as well as incomplete combustion [77–79]. Additionally, in incineration, copper in WPCB will play the role of catalyst for dioxin formation in the presence of brominated flame retardant [5]. This all contributed to the high emission amount of PBDD/Fs, as high as 130,000 ng/g, which is very high compared to other investigations [80]. Also, the amount of PBDD/Fs exceeds PCDD/Fs significantly due to the abundance of bromide in WPCB. Other gaseous pollutants including Br_2 , HBr, CO, and NO_x also attract considerable concern about them.

Ni et al. has conducted high-temperature WPCB incineration in a tube furnace and found that high-temperature combustion favors the removal of PBDD/Fs, which can release maximum 99.9% bromide into flue gas in the form of HBr or Br_2 with much lower toxicity compared with PBDD/Fs [79]. Also, the temperature needs to exceed 1200 °C in order to reduce the formation of CO and ensure the completely decomposition of brominated flame retardant (Fig. 3). However, the high temperature will slightly favor the formation of NO_x from 690 mg/ Nm^3 (800 °C) to 790 mg/ Nm^3 (1400 °C) that exceeds the emission standard value of 500 mg/ Nm^3 . In spite of HBr and Br_2 having a lower toxicity, they still need further treatment like adsorption to avoid the emission to local atmosphere.

Other than the gaseous emission that incineration releases, there is still the solid-phase residue of the incineration that is termed “bottom ash,” which will be landfilled or processed for further treatment. There are significantly enriched heavy metals in the bottom ash including copper (35.8–1295 mg/kg), Pb (226.3–606.6 mg/kg), and Cd (0.87–7.46 mg/kg), which makes the safe disposal of it become a troublesome issue [76]. Normally, a vitrification process at a temperature of 1500–1600 °C is typical for the treatment of bottom ash [82].

Therefore, incineration as a treatment method for WPCB is not an environmentally friendly option considering the toxic emissions. Also, the construction of an incineration plant is a major expenditure for local governments. Actually, as these side effects were revealed by the emerging researches, the use of existing incineration plant or planning for future incineration plants was seriously affected in many countries. Public concerns and acceptability were more attracted to the recycling instead of simple treatment of WPCB.

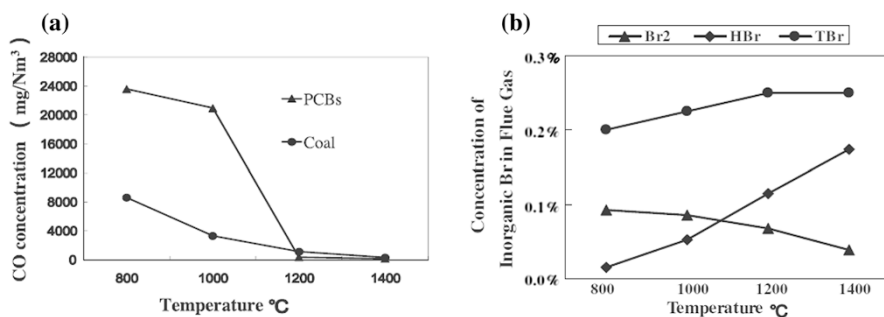


Fig. 3 Effects of temperature on CO emission (a) and HBr/ Br_2 emission (b) (excess air factor = 1.3, high temperature zone residence time = 0.25 s)

4 Primitive Recycling Techniques

4.1 Partial Recovery of Metallic Fraction from WPCB

4.1.1 Pyrometallurgy Recycling Techniques

Pyrometallurgy recycling techniques are conducted by decomposing WPCB in the absence of air or the presence of an inert atmosphere. It is a very important and mature technology for WPCB recycling and numerous works have been done on this. Although pyrometallurgy shares similarities with incineration, they are still distinct and separate techniques. The main difference between pyrometallurgy and incineration is that the purpose of incineration is simply reducing the volume of WPCB and to, achieve partial heat recovery though the incineration of WPCB when the heat released is adequate, whereas the purpose of pyrometallurgy focuses more on resource recovery, which includes the concentrating of MF and other materials out of the WPCB feedstock by decomposing NMF to low molecular weight organic compound-formed liquid or gas. This also leads to the result that unlike incineration, the operation cost for pyrometallurgy is normally much higher than incineration due to maintaining the absence of oxygen from the process. More comparisons of incineration and pyrolysis in detail are listed in Table 7.

In pyrometallurgy, the process is typically divided into two stages. In the first stage, the WPCB starts to decompose due to the intensive heat input and the release of volatile organic compounds. The second stage is the formation of char due to the pyrolysis of polymer inside the structure [6]. Therefore, temperature is a very critical variable in pyrometallurgy such that low temperatures (<400 °C) will favor the formation of liquid products while high temperatures (>800 °C) will help the breakage of high molecular weight compounds, thus producing more small organic molecular [15, 83, 84]. Also, the pyrolysis of WPCB is extremely dangerous while the temperature is low (lower than 800 °C) and the absence of an inert atmosphere since there will be PBDD/Fs formation [85]. Normally, the absence of air is relatively difficult to ensure, especially in large-scale applications, thus the production of PBDD/Fs is a serious issue for low-temperature pyrolysis.

As for the pyrolysis products, some pyrolysis reactions can produce pyro-oil or pyro-gas, which has the potential to be used as fuel or chemical material source, but the complexity and uncertainty of it greatly hampers its application [15, 16]. Also, the products of pyrometallurgy have been characterized by several groups and HBr, by-products of brominated phenols, PCDD/Fs, PBDD/Fs have been found in pyrolysis products, which has the side effects of aquatic toxicity, carcinogenicity, and mutagenicity [17, 18, 86–89]. As for the pyro-solid, which is the inorganic components left after pyrolysis normally generates a huge amount of acidic effluents, will jeopardize the aquatic environment and cause side effects to human health [90]. As a result, the majority of research only focuses on the recovery rate of WPCB without overall consideration of the environmental impact analysis.

Pyrolysis of commercial WPCB has been done in an autoclave at 500 °C for 30 min and the pyro-liquid, pyro-gas, as well as pyro-solid were collected [15]. The

Table 7 Comparison between incineration and pyrolysis [81]

Aspect	Incineration	Pyrolysis
Dioxins and furans emissions	Incineration produces dioxins that are released in air and remain also in the solid material	Pyrolysis has a reduced production of dioxins
Bromine recovery	Incineration achieves complete bromine evolution in combustion gases. There is a risk of formation of elementary Br ₂	Bromine evolves part in the gas and part in pyrolysis oil. Bromine recovery could be an important aspect for the pyrolysis plant
Tin recovery	With incineration tin solder recovery is not possible	Tin solder recovery is possible with pyrolysis
Heat recovery	Incineration will release more heat than pyrolysis	Pyrolysis products will have 70 and 40%, respectively, of the raw material heating value (respectively for RAMs and CPUs)
Heavy metals emissions	Incineration results in the emission of mercury and cadmium	Pyrolysis process has reduced emissions of heavy metals

yields of pyro-liquid, pyro-gas, pyro-solid, and char derived from the pyrolysis of polymeric materials were 16.2, 7.3, 76.5, and 5.8%, respectively. However, the value of these pyrolysis products is very limited since the pyro-solid contains a high content of heavy metals including Cu (36.4 wt%) and Pb (3.8 wt%), which is not capable of being recovered and actually requires further treatment. Also, the pyro-liquid contains a certain amount of Br and Cl, which is hazardous to human health, and is not clarified in the paper. Guan et al. also studied the pyrolysis products of WPCB and the GCV value of pyro-liquid was found to be around 29 MJ/kg, which is around the same level as coal, which is normally 30 MJ/kg [16]. However, the Br inside the pyro-liquid will hamper the usage of it, which must undergo removal before application. The main components of pyro-gas are hydrogen, carbon monoxide, carbon dioxide, and methane at 500 °C. However, there still are some bromorganic molecules inside, which will affect the usage of the pyro-gas. Therefore, we can conclude that the failure of separation with Br is a serious challenge for the application of pyro-liquid and pyro-gas. Thus, Terakado et al. used metal oxide including ZnO, Fe₂O₃, La₂O₃, CaO, and CuO as the fixation of Br in pyrolysis process and the results show a significant reduction of HBr as well as bromorganic compounds emission [91]. The deficiency is that metal oxide was used as additive and still in the end bromide salt requires further treatment.

Guo et al. has done the pyrolysis in 500 °C and 71.60 wt% solid residue, 18.23 wt% tar, and 10.71 wt% gas were obtained from this process [92]. The main component of the pyro-gas is CO, CO₂, propylene, and small bromorganic molecules like bromomethane and bromopropane. The calorific value of pyro-gas is 2.386 MJ/kg, which is quite low comparing to natural gas (38.93 MJ/kg), together with the difficulty in direct application due to bromide inside the gas. The pyro-tar and pyro-solid have been investigated and been found to have a certain amount of metal and bromide, reducing its environmental friendliness. The energy balance was

calculated and it shows that only 35% of the heat required for pyrolysis is capable of recovery from the pyrolysis products, which means an additional heat source is necessary for the process.

Cayumil et al. has done high temperature pyrolysis from 800 to 1350 °C [93]. After this process, they obtained a slag phase, tin–lead (~40% Sn, ~8% lead, and ~45% copper)-rich metallic phase and copper-rich phase (~85% copper), which has relatively high purity. However, there are still 22–25 wt% of slag phase which has not be recycling and the crucial point is that there is still certain percentage of metal inside this slag phase, which means that although this process is very energy-intensive, there is still a considerable amount of toxic solid waste produced (Fig. 4).

To remedy the drawbacks of a high pyrolysis temperature and side reaction occurrence, vacuum pyrometallurgy techniques have recently been developed as an advanced technology for pyrometallurgy recycling techniques, since it has the advantages of low operation temperature and a reduction in the intensity and occurrence of side reaction or reformation of hazardous materials [94–96]. However, the strict vacuum requirement calls for a separation before vacuum metallurgical methods.

Anjan Kumari et al. conducted vacuum pyrometallurgy followed by solvent extraction to recycle various kinds of product after vacuum pyrolysis at 300 °C for 4 min due to the enhanced performance of pyrolysis under high vacuum [88]. This is a very systematic process that has the advantage to recycle fuel oil, fuel gas, sulfuric acid, Cu, Ni, and Fe. Therefore, the emission of toxic gas will be reduced significantly since the recovery section takes a big percentage of the total composition of WPCB feedstock. Details about this process are shown in Fig. 5. However, attention to the bromide is still not be given, since the process does not contain a step for bromide removal and TEHA dissolved in kerosene is used as the extraction solvent, which will also have the side effect of emission.

Zhou et al. found that the assistance of pre-separation will improve the efficiency of the process [49, 97]. The pretreatment is mainly aimed at separate solder and other electronic components. They performed the vacuum pyrolysis at 600 °C for 30 min under a vacuum lower than 1.5 kPa. However, the pretreatment was conducted at 183 °C, which needs an energy input as they are using an oil bath, which is not comparable to the result of separation of solder although the composition of solder remains almost unchanged. For the pyrolysis part, the pyro-

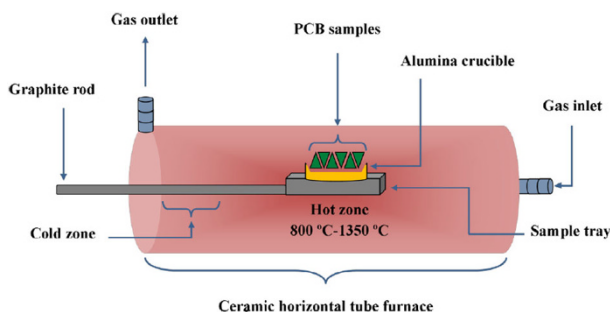


Fig. 4 Typical design of pyrolysis equipment [91]

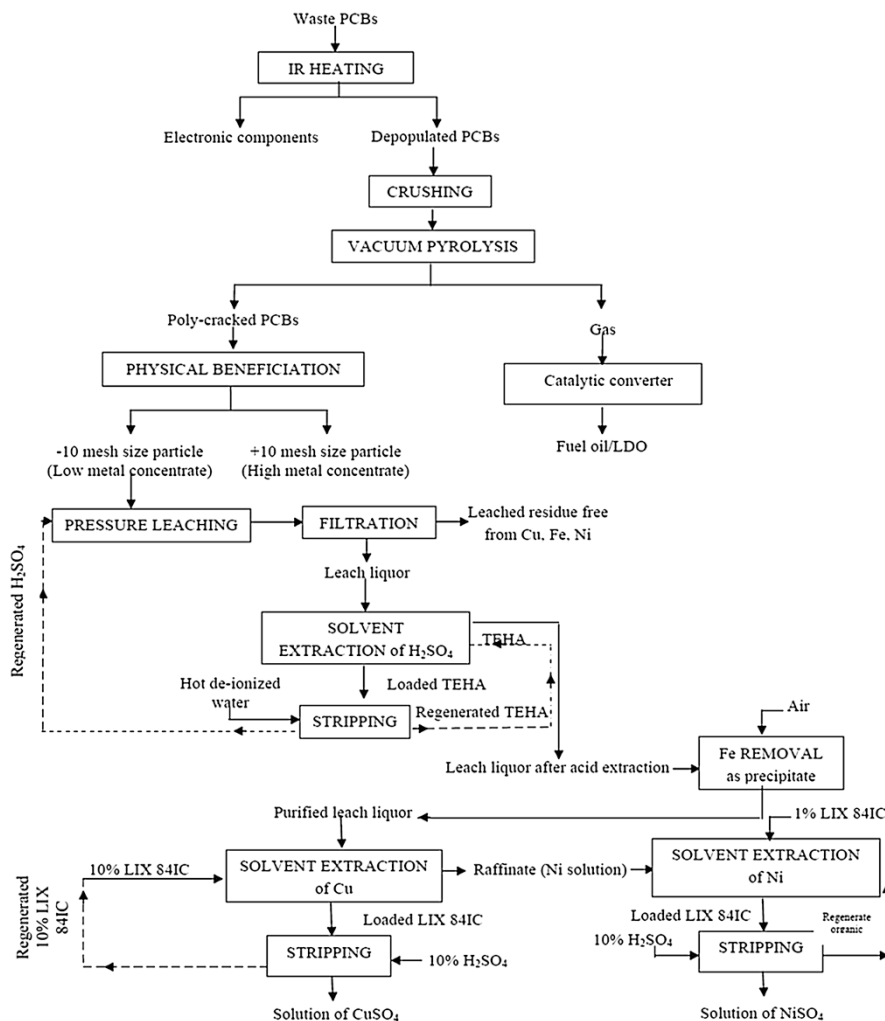


Fig. 5 Complete process flow sheets for recovery of base metals from waste PCBs [116]

oil it produced has unknown composition, which cannot be used for any refinery. Li et al. studied the vacuum pyrometallurgical process at low temperatures and concluded that vacuum (less than 1000 Pa) will significantly improve the performance of recycling by significantly reducing the activation energy from 127.87 and 115.36 kJ mol⁻¹ to 53.59 kJ mol⁻¹, which significantly improves the outcome of the process [60].

However, the drawbacks of vacuum pyrometallurgy techniques are very obvious, namely, the requirement of a high vacuum. Although vacuum equipment is used in industry, the vacuum degree needed for the vacuum pyrometallurgy technique calls for expensive equipment and good air tightness, since the failure to guarantee high vacuum degree will lead to the incomplete pyrolysis of WPCB, causing hazardous

emissions and side reactions in the process. Therefore, the application of this process is seriously hindered due to its low economic feasibility.

Summarily, pyrometallurgy recycling techniques can recycle most of the MF at the cost of ruining the NMF. Also, the burn off of the nonmetallic fraction will not only produce bromorganic compounds and other toxic emissions, but it will also give around 20–25% ash content, which will have a certain percentage of heavy metals and need a further workload to perform disposal or refining [51]. A remediation method is to do the dehalogenation either no later than the pyrolysis process, or in the upgrading of the pyrolysis products [82, 98]. However, it may add further workload and cause the reduction of the yield and value of the pyrolysis products. Moreover, copper or lead in the feedstock will function as collectors of other metals, which will result in the output of unknown alloy from pyrometallurgy instead of pure metal that require further refining [99].

4.1.2 Hydrometallurgy recycling techniques

Hydrometallurgy recycling techniques make use of solvent leaching using cyanide, thiourea, thiosulfate, halide, and recycling the metallic fraction (mainly copper and gold) from WPCB feedstock [100–102]. Compared to pyrometallurgy, hydrometallurgy recycling techniques are more accurate, highly predictable, and easily controlled, which makes it the most competitive technique for WPCB recycling currently with the assistance of mechanical crushing as pretreatment [103].

Kinoshita et al. use nitric acid as a leaching reagent and they used two rounds of leaching in the first round Ni was extracted with a concentration of 279 mg/l at 363 K for 72 h and in the second round Cu was extracted with a concentration of 3220 mg/l at 363 K for 6 h [102]. The Au was obtained by filtration of the leachant and separated in the form of flakes. The metal-rich solution was forward extracted and backward extracted by organic solvent and 4.0 M nitric acid, respectively. The recovery rate is high and selective recovery was achieved. However, the process takes a long time and it produces waste water containing an organic phase and a strong acid, which is a common issue in hydrometallurgy recycling techniques. Similarly, Park et al. use aqua regia as the leaching agent to extract palladium, silver, and gold from WPCB feedstock [50]. The recovery of palladium in the form of $\text{Pd}(\text{NH}_4)_2\text{Cl}_6$ precipitation is 93 wt%. Gold nanoparticles were obtained by organic solvent extraction using dodecanethiol and sodium borohydride with a recovery rate of 97 wt%. Silver stays stable in aqua regia and was recovered without further treatment with a recovery rate of 98 wt%. The recovery rate is very high as well as the purity of the metal they collected. However, the usage of strong acid and organic solvent decrease the environmental evaluation of this process.

Therefore, despite the advantages of the hydrometallurgical treatment methods, a serious issues is that they produce a lot of highly toxic waste water containing cyanides or halides, which is extremely hazardous for both soil and water bodies [104]. Moreover, non-cyanide or non-halide leaching solvents like thiourea or thiosulfate have disadvantages including low-stability, high cost, and high consumption of extracting reagent [21–23]. Corrosion also causes problems for

Table 8 Comparison of different kinds of leaching solvent

Leaching solvent	Advantages	Disadvantages
Acid and mix acid [103–105]	High dissolution rate	Corrosive, high concentration of acid needed
Cyanide [106, 107]	Low cost, high stability, low dosage	High toxicity, slow leaching rate
Thiourea [53, 108, 109]	Low toxicity	Difficulty in recovery, high cost
Thiosulfate [110–112]	High selectivity, nontoxic, and non-corrosive	Sensitive to pH change
Halide [113]	High leaching rate, good selectivity	High cost, environmental irritation
Hydrogen peroxide [114, 115]	Low toxicity	Need acid assistance

the equipment when several kinds of leaching reagents were applied. More details are shown in Table 8 below.

Also, the leaching process normally takes a long time to obtain metal-rich solution due to the slow leaching rate, which makes the process a time-consuming one. Therefore, studies that reinforce the driving force and accelerate the leaching rate have been studied including using electrochemistry, pre-pyrolysis, supercritical extraction, and mechanical treatment [52, 54, 99, 117, 118]. Havlik et al. studied the hydrometallurgical process with pre-combustion, in which WPCB was leached in 1 M HCl solution after combustion in air for 15 to 60 min in 500–900 °C [99, 119]. The results showed that the pre combustion at 900 °C will significantly improve the leaching of copper from the WPCB feedstock due to the conversion of Cu to Cu₂O, which dissolves more preferable in HCl. However, the pre-combustion leads to the difficulty in extracting tin since Sn is oxidized to form SnO₂, which is very stable in acid with minimal leaching. Therefore, the efficiency of hydrometallurgy was seldom enhanced even without considering the emission during combustion process.

Fogarasi et al. used mediated electrochemical oxidation to recover copper from WPCB and high purity copper (99.04%) was obtained with 63.84% current efficiency [52]. However, a sludge was still produced with certain concentrations of copper and lead (49.37 and 32.49 wt%, respectively); this issue needs further work. Also, the fate of NMF was not clarified, as well as the bromide inside the NMF. Kim et al. use electro-generated chlorine to leach metals from WPCB feedstock [120, 121]. Copper as well as noble metal was obtained together due to the high oxidation potential they gained in the process. In the first stage, the recovery of Cu is 94.91% and in the second stage the recovery rate of Au is 93.06%. Then the metal ions can be collected by an ion-exchanger with efficiency around 97%. However, the feedstock used is already after dismantling and sorting therefore it has very high metal concentration (Cu 66 wt% and Au 0.045 wt%), which is not comparable to the raw WPCB feedstock, making the research not representative for all kinds of WPCB. Also, although the acid solutions as well as the low concentration solution are recycled back after ion exchange, the problem of discharge still exists since the halide is concentrated in the process if it is applied to WPCB with a high NMF content as well as the low pH of the solution. Silvas et al. used magnetic separation before the leaching test and they recovered 90 wt% Al, 40 wt% Zn, 8.6 wt% Sn in

the first leaching stage using sulfuric acid media and 100 wt% Cu, 60 wt% Zn, and 10 wt% Al in the second stage using oxidant [54]. It is supposed that the recovery rate is very high due to the assistance of mechanical separation and this could be a possible way for future work. However, the fate of NMF was not mentioned in this paper and remains a potential pollutant.


Summarily, hydrometallurgy recycling techniques are easy to apply and simple to operate. However, the problem that cannot be avoided or ignored is the discharge of leachate as well as the pollutants since these techniques do not incorporate the recycling of NMF. The process is mainly undermining the structure of NMF and emits them, which not only wastes the useful part of NMF but also converts them into pollutants. Another issue that should be highlighted is that the recovery rate for hydrometallurgy recycling techniques is full recovery. Therefore, there will be a certain amount of heavy metal present in the effluent in the form of free ions, which will reinforce the hazardous content of it. So an upgrading of current hydrometallurgical recycling techniques is urgently required to stop the wild application of it.

4.1.3 Biometallurgy recycling techniques

Biometallurgy recycling techniques use microorganisms including bacteria or fungi to treat WPCB [122]. Commonly used bacteria include mesophilic chemolithotrophic, cyanogenic or moderately thermophilic bacteria [25, 26, 123, 124]. The mechanism of biometallurgy recycling techniques is similar to hydrometallurgy recycling techniques since they all incorporate the process of leaching. However, instead of adding leaching reagents, biometallurgy recycling techniques normally use the chemicals produced by the microorganism itself, including organic/inorganic acids, cyanide, or sulfate ions. After leaching, the metal ions will form complexes or precipitates and thus they are separated from the culture broth for direct use or further refining. It has the advantages of only a small volume of waste water discharge and is environmental benign compared to hydrometallurgy, which generally requires a high dosage of toxic chemical reagents. Besides, certain kinds of bacteria are capable of reducing brominated flame retardants in the pathway shown in Fig. 6, which is rarely achieved in other recycling techniques [122, 125].

Liang et al. used a mixed culture of *Acidithiobacillus thiooxidans* and *Acidithiobacillus ferrooxidans* to recover copper from WPCB fine powder [123]. The bacteria can oxidize elemental sulfur added to sulfuric acid for bioleaching and then extract the metal from the broth. The highest recovery rate (98.37%) was obtained with the condition of pH value 1.56, elemental sulfur S^0 5.44 g/l and 16.88 g/l $FeSO_4 \cdot 7H_2O$ concentration. However, the increase of WPCB addition in culture from 18 to 32.4 g/l will cause a sharp drop in the copper recovery rate from 98.3 to 87.2%. Also, the fate of NMF was not mentioned in this work and remains a potential hazardous material. Ilyas et al. used moderately thermophilic bacteria to recover metals and conducted the process in a column test [124]. The recovery rate for Zn, Al, Cu, and Ni is 80, 64, 86, and 74%, respectively, which already meets the requirements of industrial-scale implementation for recycling of MF of WPCB. It is also noticed that NMF will contribute to the alkalinity which will affect the leaching of metal ions, requiring washing before conducting the culture stage. However, in



Fig. 6 Proposed pathway for the reductive debromination of 2,4,5-2',4',5'-BB in Firemaster by Pine River and Hudson River sediment microorganisms. Debromination of 2,2'-BB was only observed for a pyruvate plus Aroclor 1242 enrichment obtained from Hudson River sediment microorganisms

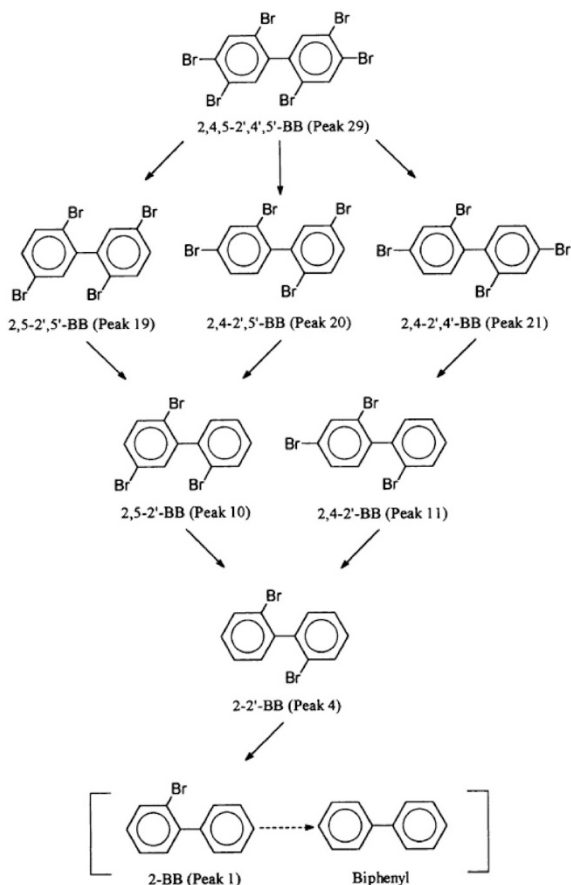

this process, Pb and Sn along with other metals will form precipitates in the column, not only preventing the recycling of metals but also causing potential blockages of the column. Yang et al. used *A. ferrooxidans* to study the factors affecting the mobilization of copper in the bioleaching process [125]. The higher concentration of Fe^{3+} from 0.64 to 2.13 g/l in the stock solution will bring to the increase of copper leaching in 12 h from 34.53 to 79.75%. As a similar result was observed that copper recovery decreased from 99.06 to 88.40% in 48 h when the pH value increased from 1.5 to 2.0. Therefore, it is noticed that the concentration of Fe^{3+} as well as the pH value have a very obvious effect on copper leaching. Ting et al. used two cyanide-producing bacteria, *Pseudomonas fluorescens* and *Chromobacterium violaceum* to extract gold and copper from WPCB and the recovery rate was around 27 and 20% for gold and copper [126]. In a two-step extraction, the recovery rate for gold and copper was increased to around 30 and 24%, respectively.

However, biometallurgy recycling techniques require a lot of nutrients for microorganism enrichment and metal extraction. The addition of an Fe source is necessary for copper extraction since the solubilization of copper needs the presence of Fe^{3+} according to reaction (1). Also, the ferrous ion is the energy source for *A.*

ferrooxidans, which is an aerobic and autotrophic bacterium according to reaction (2).



Also, the low extraction rate in high WPCB dosage due to the limitation in air distribution and oxygen mass transfer hinder the application of the biometallurgical treatment method [127]. Moreover, normally microorganisms are vulnerable to heavy metals, thus the growth of them will be inhibited due to the toxicity of metals [128]. Although some bacteria or fungi can adjust to the condition after prolonged adaptation time and achieve a good recovery rate, the time required for this adaption is extremely long (more than a week) [129]. Furthermore, the recovery period for biometallurgical treatment is much longer than pyrometallurgy or hydrometallurgy recycling techniques, which affected the positive evaluation of process. Also, normally the WPCB feedstock needs to be a fine powder with a particle size around 100 μm or even lower to ensure adequate surface contact, which will consume a lot of energy in the early stage [130].

4.2 Summary of partial recovery of metallic fraction from WPCB

From the above-mentioned techniques, partial recovery of the metallic fraction from WPCB processes will benefit metal recovery, which incorporates the most valuable components inside WPCB. The application of partial recovery of metallic fraction from WPCB still exists in many developing countries trapped by the fact of lacking funding. Differences still exist among pyrometallurgy, hydrometallurgy, and biometallurgy in terms of cost, efficiency, harmful effect, as well as the time for recycling as shown in Table 9.

Pyrometallurgy shows the best performance in efficiency and time for recycling since it can significantly remove the non-metallic fraction in WPCB by thermo-decomposition. However, the high energy consumption and construction cost also make it the most expensive technique. Additionally, the toxic emissions and residues generated in the process cause considerable harmful effects to the environment if performed without proper treatment. Compared to pyrometallurgy, hydrometallurgy and biometallurgy have much less environmental impact since the pollution is confined mostly in the liquid phase. Nevertheless, the driving force in hydrometallurgy and biometallurgy is not comparable to pyrometallurgy, thus making them extremely time-consuming techniques although their cost is several times lower than pyrometallurgy. Summarily, the partial recovery of metallic fraction from WPCB by the above methods has obvious drawbacks. It is imperative to develop further full recovery techniques for WPCB to improve the current methods of WPCB recycling.

Table 9 Comparison of different kinds of partial recovery of metallic fraction techniques

Technique	Cost	Efficiency	Harmful effect	Time for recycling
Pyrometallurgy	High	High	High	Short
Hydrometallurgy	Low	Medium	Medium	Medium
Biometallurgy	Medium	Low	Low	Long

4.3 Primitive full recovery from WPCB

Despite diversity possessed by MF recycling techniques, a common drawback shared by them is the absence of NMF treatment, which will give rise to the toxic emission including brominated organic compounds, secondary particulates, and other kinds of pollutants. A simple mass balance concept implies the less recycled, the more emitted. Therefore, techniques focusing not only recycling the MF but also achieving the safe disposal of NMF simultaneously are reviewed next including supercritical fluid extraction, plasma treatment and hydrothermal method [131–133].

Huang et al. used DC arc plasma to treat printed circuit boards, which decomposed the WPCB in molten bath at 1400–1800 °C in a DC arc furnace [131]. The product for this process is homogenous and vitreous slag and small molecular gases including HCl, H₂S, NO_x, and SO₂. Although the safe disposal of solid residue is achieved, it produces a certain amount of air pollution and the energy consumption is huge due to the high temperature and long duration time. Xiu et al. has conducted a series of studies using supercritical fluid including supercritical water (SCW) and supercritical methanol (SCM) to recycle WPCB [134–138]. For the SCM recycling, most kinds of heavy metals are converted to metal oxides with around 100% conversion, except for Mn and Ni, since near 50% of them enters in liquid phase. The copper extracted from WPCB will undergo an eletrokinetic (EK) process and can be synthesized to nanoparticles, which functions as a photocatalyst [139]. The degradation of NMF also happens with the formation of phenol and phenol derivations, which is the main composition of liquid product (~55%). Xing et al. also used SCW to detoxify bromorganic compounds inside WPCB and achieved maximum debromination rate of 97.8% [55, 140]. The bromide was concentrated in water in the form of hydrogen bromide. Also, the bromine-free oil with main components consisting of phenol (58.5%) and 4-(1-methylethyl)-phenol (21.7%) was collected. Moreover, copper was recovered in the purities of near 95% with a recovery rate as high as 98.11%. However, supercritical technologies need high temperature (above 400 °C) and high pressure (higher than 20 MPa). Therefore, the utilization of this process needs a good-quality equipment, which increases the cost significantly. Yin et al. used hydrothermal technology to decompose brominated epoxy resin in WPCB and achieved more than 80% decomposition rate and obtained a liquid with the main composition of phenol, which can be used as a chemical material [141]. Also, after this treatment, WPCB can be used to recover MF with a much lower emission. However, the feature of hydrothermal technology determines that the operation capacity is very limited; in this work, 0.1 g WPCB per batch, which is not applicable for large-scale operations.

Summarily, despite the fact that the previously mentioned technology can recycle MF with the safe disposal of NMF, the energy and effort put into this process is not proportional to the output, which is only the MF. Also, although the safe disposal of NMF will not cause further pollution, a considerable amount of resource inside NMF is wasted after all. Therefore, the separation of MF and NMF and further recycling of NMF is necessary for the consideration of sustainable resource recovery. For this, the effective separation for MF and NMF is indispensable for the purpose of more detailed and efficient recycling.

5 Advanced Recycling Techniques

5.1 Mechanic Separation of MF and NMF

Based on the previous Sects. 1, 2, 3, 4, it can be concluded that a common drawback shared by the primitive recycling technologies is the lack of attention given to the NMF-70% by weight of the WPCB, which fundamentally blocks the recycling or upgrading of NMF due to the loss of mechanical or chemical structure and properties. Therefore, separation of MF and NMF without damage to the structure of NMF is the precondition for NMF recycling and itself is also regarded as one type of recycling since the MF separated from the feedstock can be sold to the market directly. With the development of technologies, the method for MF and NMF separation has changed from manual disassembly to more advanced technologies. Mechanical separation methods take the advantages of the differences in density, magnetism, and electro-conductivity, and have become increasingly important in the recycling of WPCB [27–30]. Since the composition of NMF indicates that most chemical separation techniques will damage the properties of NMF and bring difficulties to further treatment operations, mechanical separations stand out although in some situations they were regarded as assistance processes for pyrometallurgy or hydrometallurgy techniques. Still it is an efficient recycling method which offers great potential, especially with the development of electrical conductivity-based separation [53]. Also, with the development of the automation industry, the mechanical separation also involves automatic or semi-automatic application [11]. These techniques can relieve the situation a lot by separating the MF and NMF of WPCB with a high efficiency and good purity. Therefore, it makes it possible to treat MF and NMF separately and it brings about the selling of high-purity MF to the market and also directing recycling and modification of NMF from WPCB as two potential ways to treat the NMF part of WPCB. Also, the separation of MF and NMF avoid potential interactions of NMF in further treatment stages because the metals in MF can catalyze unwanted side reactions of NMF.

5.2 Density-based Separation

Density-based separation uses the differences of particles size and density to separate the MF and NMF and various equipment items were developed, as shown in Fig. 7 [27]. This method has a long history dating back to the jigging method,

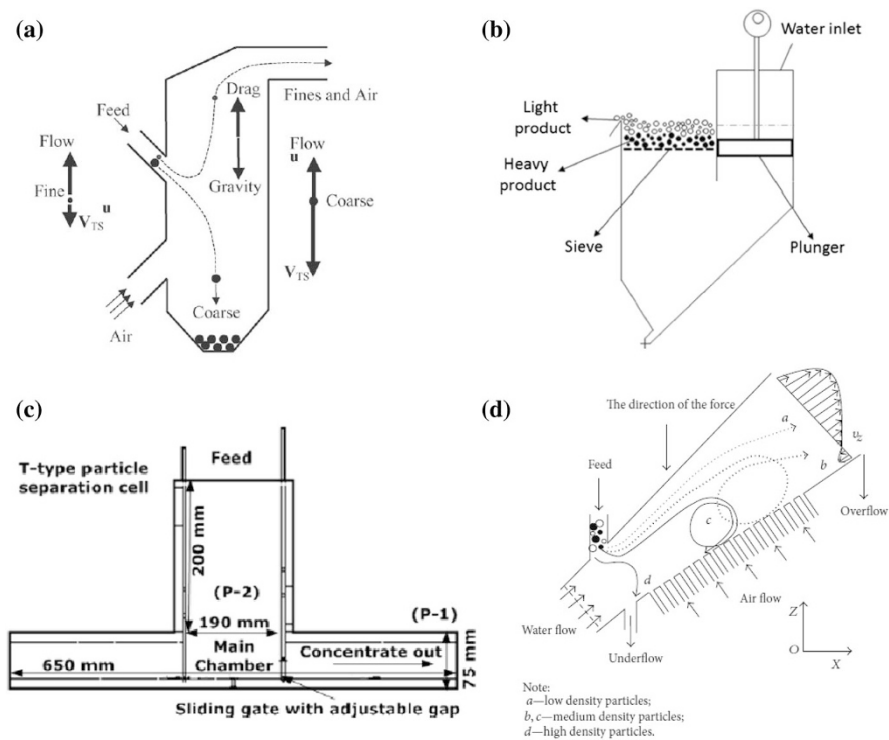


Fig. 7 Schematic illustration of several kinds of density-based separation methods: **a** air classifier, **b** laboratory scale Harz jig, **c** T-type vertical vibration separation cell, and **d** inflatable tapered diameter separation bed

which used a plunger to hit the bottom of the feedstock to give a force to kick the light particles out, thus preserving the heavier ones. Sarvar et al. used wet jigging to separate WPCB feedstock and the recovery rate of metal content for coarse-size, middle-size, and small-size fractions are 95.6, 97.5, and 85%, respectively [142]. However, low grades around 70% were obtained and a significant part of gold is lost at the flotation process. Currently, air classification is a popular method based on the fact that the particles suspended in the gas stream will be separated due to the gravity and drag forces experiencing in opposite directions [28]. The heavier particles will gain larger terminal settling velocity and move towards the bottom of air stream while light particles go to the opposite side, which is the top of the column. Eswaraiah et al. used an air classifier to separate the WPCB and recover 96.7% copper in the sink and 98% plastics and glass fibers in the float [143]. However, there is still 70.94% of other materials in the sink, which makes the purity of copper only 26.77%. Habib et al. [144] also use vertical vibration to separate MF and NMF from WPCB feedstock and they obtained a MF fraction as a combination of Cu (~50%), Fe(~10%), Sn(~10%), Zn(~8%), Pb(~8%), as well as some NMF. Also, the NMF fraction includes 65% NMF and 25% Cu as well as a certain amount of metals. The advantages of density-based separation are the simplicity of

its equipment and low energy consumption while the common problem is low product purity, adding workload and difficulty to further refine [145].

5.3 Magnetic-based separation

Magnetic-based separations can achieve the recovery of ferromagnetic metals such as aluminum from non-ferrous metals and other non-magnetic contents with a permanent or electro-magnet. An eddy current separator is a mature technology for magnetic-based separation that can efficiently separate aluminum from non-ferrous contents, as shown in Fig. 8 [29]. When the feedstock passes over the separator, aluminum will be affected by the eddy current generated by the rotation of the magnets inside the shell at high speed, which causes them to be surrounded by a magnetic field. Therefore, the particles will be repelled away from the magnet much further due to the polarity between the two magnetic fields, thus the separation between them and NMF is achieved. Zhang et al. used an eddy current separator to recovery aluminum from electronic scrap and achieved more than 90% aluminum recovery rate with a purity around 85% for a single pass [146]. Yoo et al. used a two-step magnetic separation to recover MF from WPCB and from the first magnetic separation at 700 Gauss, 83% of the nickel and iron was recovered in the magnetic fraction. The second magnetic separation at 3000 Gauss increased the total amount of nickel recovery but caused a drop of the nickel purity from 76 to 56% [58].

However, not all MF can be separated out through eddy current separation because only material with a high σ/ρ can be separated out, where ρ is the density of the material and σ is the electrical conductivity of material. Table 10 shows the materials that can be separated by an eddy current separator, from which it is obvious that aluminum is the most easily separated material while stainless-steel, plastic, and glass have a zero value for the conductivity-to-density ratio, meaning it is not applicable to separate them by an eddy current separator [147].

5.4 Electronic conductivity-based separation

Electronic conductivity-based separation focuses on the difference in the electrical conductivity between MF and NMF, which is normally related to corona

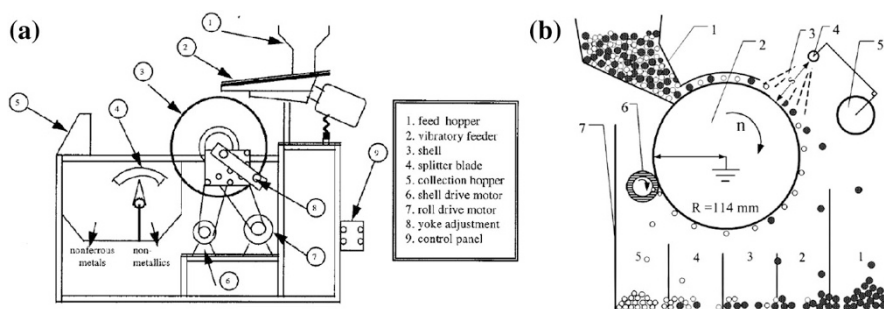


Fig. 8 Schematic illustration of eddy current separator (a) and corona electrostatic separator (b)

Table 10 Materials that can be separated by an eddy current separator, and their properties

Materials	σ ($10^{-8}/\Omega\text{m}$)	ρ (10^3 kg/m^3)	σ/ρ ($10^3 \text{ m}^2/\Omega\text{kg}$)
Al	0.35	2.7	13.1
Zn	0.17	7.1	2.4
Ag	0.63	10.5	6
Cu	0.59	8.9	6.6
Brass	0.14	8.5	1.7
Pb	0.05	11.3	0.4

σ electrical conductivity, ρ density, σ/ρ ratio of electrical conductivity to density

electrostatic separation in PCB recycling that fits the condition well, as shown in Fig. 8 [30]. The sample feed in the separator will be bombarded by the high-voltage electrostatic field generated by a corona electrode and electrostatic electrode. Now, the MF will be neutralized quickly as they contact the earthed electrode and leave the rotating roller while the charged NMF are pinned by the electric image force to the rotating roller and move with the rotating roller, finally falling into the holding tanks.

Li et al. used corona electrostatic separation with the pretreatment of pulverization of WPCB feedstock to successfully separate the MF and NMF of WPCB and achieved a high recovery rate (more than 90%) along with high capacity (0.5–1 t/h) with no obvious side effects compared to fluidized bed separation, which has wastewater discharge or air-current separation with a dust-releasing issue [19, 148]. The MF has very high purity and can be sent to a smelting plant directly or with minimal refining. Jiang et al. has designed a new two-roll electrostatic separator that takes advantage of the force of gravity to pass the mixture to the second step for recycling of metals and nonmetals from waste printed circuit board [149]. The production capacity was significantly increased for maximum 50% with 45% reduction of middling products. However, mechanical processes for recycling WPCB normally needs to undergo at least two steps, including coarse crushing and fine pulverizing and especially during fine pulverizing, the temperature will increase up to almost 300 °C [150]. Dust and ash is a common issue for mechanical separation and although it can be avoided by using personnel protective equipments, it still adds to the cost of the process, which makes the economical feasibility of this energy-intensive process even worse. Therefore, an upgrading of NMF to make value-added products is necessary to remedy the expenditure of energy and equipments cost. Also, noble metals will be lost in the crushing process since they will attach on the surface of nonmetallic fraction and cannot be recycled [49].

5.5 Directly Recycling of Nonmetallic Fraction from WPCB

At the beginning, the purpose of recycling of NMF from WPCB is simply to avert the potential hazardous environmental impacts when they end up in landfill or incineration. The composition of NMF is a random combination of epoxy resin and glass fiber. The reuse of NMF is hindered due to understanding of the chemistry of them. Therefore, it is common to be directly used as filler, concrete, and modifier,

which means the NMF was used without any forms of modification and is a low value-added material [31–35, 151–154].

Guo et al. has done a series of studies on the feasibility of replacing wood flour in the production of phenolic moulding compound (PMC) using the NMF of WPCB [151, 152]. The addition of NMF can significantly improve the impact strength and heat deflection temperature (HDT) and reduces flexural strength and Raschig fluidity of the phenolic moulding. Notably, the increase of the content of NMF will sharply reduce Raschig fluidity. Therefore, the optimum content for adding NMF is considered to be 20 wt%, in which condition the flexural strength is 70 MPa, the Charpy notched impact strength is 2.4 kJ/m², the heat of deflection temperature is 168 °C, the dielectric strength is 3.9 MV/m and a Raschig fluidity of 103 mm. These criteria all meet the national standard. In addition, they did economic analysis, which shows that the addition of NMF can save the cost for the producers of PMC. However, if the cost-saving can cover the energy consumption of corona electrostatic separation is not clear. The authors claim the market price of NMF is for free, which is not correct in the current market. They also study the possibility of producing nonmetallic plate (NMP) from NMF of pulverized WPCBs by hot-press forming with the addition of a resin paste as a bonding agent [31, 32]. The maximum content of NMF in reproduction nonmetallic plate (RNMP) can be as high as 40 wt%. However, the RNMP showed excellent mechanical properties with impact strength of 5.8 kJ/m² and flexural strength of 65.1 MPa when NMF added was 20 wt%. Yokoyama and Iji also investigated the use of NMF as filler in the reproduction of resin-type construction materials and the comparison of mechanical properties of these materials with those of reference materials with silica powder was conducted [33]. The NMFs in the materials show reinforcement in mechanical strength and thermal expansion properties of the epoxy resin mold, which has better performance than talc, calcium carbonate, and silica. This is probably because of the compatibility between the NMFs and the epoxy resin matrix, and also the incorporation of glass fiber.

Niu and Li used recycled waste PCBs for cement solidification, which is actually a method to use the waste PCBs as a raw material for concrete [154]. It is proved that the cement solidification can be significantly improved in terms of the compressive strengths (4.89 MPa for slag cement and 7.93 MPa for Portland cement) and the impact resistance of 200 (maximum) of NMF can turn it into strong monoliths. The leaching test shows that the leaching of Pb in the raw material can be effectively prevented (<5 mg/l) even under an acidic environment.

Zheng et al. used NMFs as reinforcing fillers in PP composites [153]. The NMFs are modified by a silane-coupling agent KH-550 and PP powder S1003 is applied as the matrix polymer. NMF and PP powder are pre-mixed and the products are obtained by extruding. The mechanical characterization shows that the ensile strength, tensile modulus, flexural strength, and flexural modulus are significantly improved 28.4, 62.9, 87.8, and 133.0%, respectively, by the adding of NMF. The optimum content of the NMF added is 30 wt% based on technical, environmental, and economical consideration.

However, Lu et al. found that PCB can be liberated effectively with a size between 0.5 and 1.2 mm while for a better recovery ratio the over-pulverized

phenomenon is very serious. This limits the further use of the glass fibers that are the support material of PCB (~ 50 wt%) [155]. The mechanical properties of NMF were sacrificed in order to achieve a high metal recovery rate. Therefore, the direct reuse of NMF is seriously influenced due to this phenomenon. A more advanced technology of NMF modification is indispensable.

5.6 Modification of Nonmetallic Fraction from WPCB

The direct recycling of NMF can help solve the disposal problem of NMF. However, it is still weak for them to compensate for the high operation cost of the MF and NMF separation due to the low value-added products they produced by NMF. With the requirement to better use NMF, which takes more than half of the weight of NMF, the modification of NMF followed by the upgrading was studied by many research groups [156–160].

One thought for the modification is based on the thought that NMF is a carbon source for potential reuse considering the high content of carbon in its composition due to the addition of epoxy resin or other polymers. Normally, the carbon content in NMF is between 30 and 40%, which varies with the source of WPCB [161]. Ke et al. first pyrolyzed the NMF of WPCB in the temperature range 500–800 °C and used physical or chemical activation to obtain activated carbon [156]. Physical activation with H_2O as an activation reagent produced granular activated carbon with a surface area as high as 1019 m^2/g and pore volume 1.1 cm^3/g while chemical activation with KOH as activation reagent obtain the same product with higher surface area of 3112 m^2/g and a pore volume of 1.13 cm^3/g .

Rajagopal et al. used the activated carbon prepared by physical activation with CO_2 subsequent to pyrolysis of NMF of WPCB to and apply it in supercapacitor [157]. The NMF activated at 850°C for 5 h shows the highest surface area of 700 m^2/g as well as 0.022 cm^3/g pore volume. Electrochemical characterization of the activated carbon prepared under optimum conditions, shows a specific capacitance of 220 F/g at the current density of 30 mV/s and 156 F/g at the current density of 100 mV/s, which is comparable to activated carbon prepared by other methods. Also, the activated carbon has an energy density of 15.84 Wh/kg at 850 W/kg, which is very high compared to commercially available supercapacitors based on activated carbons that have an energy density ranging from 4 to 5 Wh/kg with power density values of 1 to 2 kW/kg [162]. Moreover, the retention value of the activated carbon was studied to be 98% for over 1000 cycles.

Hadi et al. has developed a thermal-alkaline activation process to functionalize NMF to produce an aluminosilicate adsorbent for heavy metals uptake from waste water [158]. The NMF was mixed with potassium hydroxide solution and activated in 300 °C to develop the porosity of NMF which is a non-porous material. After activation, equilibrium isothermal adsorption tests show that the modified novel material called ANMF had a high uptake capacity for Cu(2.9 mmol/g), Pb(3.4 mmol/g), Zn(2.0 mmol/g), which is much higher than commercial adsorbents used in industry. Xu et al. studied the factors affecting the adsorption capacity including contact time, initial cadmium ion concentration, pH, and adsorbent dosage when this material is used for cadmium uptake [159]. The results showed that pH

has an important effect on the uptake capacity for cadmium and the maximum uptake capacity for cadmium is 2.1 mmol/g obtained when $\text{pH} = 4$. Modeling of the adsorption was also done in this work and several isothermal equations have been studied while the Redlich–Peterson model shows the best fitting. Moreover, the activation mechanism as well as the optimization of reaction condition was done by Ning et al. [160]. The factors affecting the pore-development process were studied including reaction temperature, impregnation ratio, and reaction time, and the results shows that reaction temperature and impregnation ratio has a significant effect on the structure of ANMF during the reaction while reaction time has no significant effect. This provides a possibility for the porous structure tuning for the NMF of WPCB, which will significantly enlarge the potential applications of NMF as a catalyst, adsorbent, and filter support.

Summarily, the modification of NMF to make value-added products can greatly improve the value of NMF. Thus, the value added to NMF can possibly compensate for the high cost derived from mechanical separation.

6 Perspectives on Recycling Technologies

6.1 Economy Perspective

The economy perspective is always very important, or of first priority for the evaluation and implementation of a recycling technique. The process, which is cost-effective, will have a better chance to be commercialized especially in developing countries due to the lack of sufficient funds for WPCB recycling. Obviously, landfill and incineration has limited economical benefit even without the concern about the treatment of the hazardous substances they emit. The construction and administration costs of landfill sites or incineration plants are large expenses with a scant return. This is also a reason for the reduction in the current application of these two techniques for WPCB treatment. Pyrometallurgy and hydrometallurgy recycling techniques can achieve partial recycling of WPCB by recovery of MF from the feedstock. However, the intensive energy consumption in pyrometallurgy is ascribed for the main expense in the whole process. The energy power in the process is around 0.2–4 kW, varying with the different processes, while sufficient data is not available for these techniques since most works were conducted at the laboratory scale and energy analysis is absent for most of the studies [148]. However, the normal pyrolysis temperatures are from 400 °C to 800 °C, and the post gas treatment equipment normally needs the temperature higher than 1200 °C and no doubt consumes a considerable amount of energy. For hydrometallurgy recycling techniques, the chemical reagents used including cyanide, halide, acid, or other chemicals takes a considerable and indispensable percentage of the cost. Also, in hydrometallurgy, water is used as leaching media and solvent on a large scale, which also contributed to the operation cost.

Furthermore, as the decrease of percentage of noble metal in the WPCB is due to manufacturing upgrading, the driving force for recycling MF from WPCB is decreasing, since previous works focus on the benefit of metal recovery. Recycling

of NMF is a potential way to remedy the cost on energy and/or chemical cost. However, the precondition for NMF recycling is the homogenization of the WPCB, which means the pulverization of WPCB feedstock by shredders and hammer mills, which also requires energy and equipment cost. A fine size of NMF (around 0.1 mm) is typical for the recycling of NMF in many studies. While in both pyrometallurgy and hydrometallurgy recycling techniques, the structure of NMF was totally decomposed, the recycling of NMF is therefore not applicable. In some types of mechanical separation, the structure or composition of NMF was preserved with a meager effect on the chemical and mechanical properties. Nevertheless, the direct use is not enough to add adequate value to compensate for the cost required to preserve their structure. Therefore, the upgrading and recycling of the value-added non-metallic fraction are attracting more and more researchers.

6.2 Environmental Perspective

The environmental perspective is another important issue that affects the evaluation of the WPCB recycling techniques. A general rule for emissions is that the more material recycled, the less will be emitted. Therefore, the focus of a technique should not only be on the performance of the recovery rate of specific components like copper or noble metals, but also the fate of the remaining part due to the potential emissions they may have, especially for gaseous emissions. The environmental emissions can be divided into primary pollution, which comes from the WPCB, and secondary pollution, which is emitted during the treatment or recycling process.

For primary pollution, heavy metals including Cu, Pb, Cd are of great concern. They can enter the environment in the form of leachate in landfill or vapor in incineration or some pyrometallurgy recycling techniques without proper purification. It can cause the distortion of the human body as well as various other hazardous effects; the presence of PBDD/Fs and PCDD/Fs is a critical health issue when their presence in the vapor will cause cancer. They mainly form due to the oxidizing atmosphere and the presence of metals as catalyst.

However, the majority of public attention is still paid to the emissions of NO_x, SO_x, or VOCs, while some kinds of pollutants are ignored due to their relatively low toxicity, like Br and HBr. Yet low toxicity does not equal being environmentally friendly. The vast emissions still cause damage to individual hygiene [19]. Bromide is a hazardous material source with obviously inadequate attention, it is even claimed as harmless in a few studies [5, 15]. Bromide concentration in WPCB is relatively high (~ 4%) due to the addition of brominated flame retardants [163]. The decomposition of brominated flame retardants happens in the recycling process while bromide still remains in the form of several kinds of bromide or bromorganic compounds including HBr, bromomethane, and bromophenol (Fig. 9). However, research shows that bromide, especially HBr, has a very bad effect on human health, since it can cause health problems and is accumulated in the human body and is difficult to degrade. Therefore, to achieve complete recycling and elimination, emissions are the ultimate objective of the environmental impact of WPCB recycling techniques.

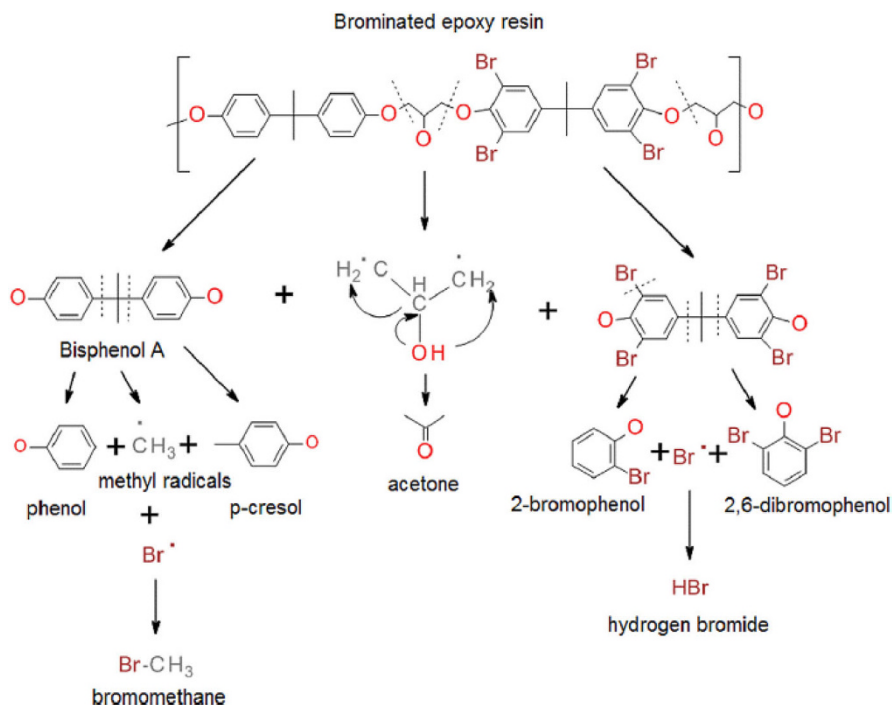


Fig. 9 Possible decomposition pathway of brominated epoxy resin according to the products generated [51]

6.3 Gate-to-Market Ability Perspective

Previously, the evaluation of a recycling technique is always based on economic and environmental perspectives. However, for a real application, it is not a two-sided choice while sometimes a technique is both cost-effective and environmentally friendly and does not mean that this process has high feasibility since the product's status is not well clarified. In previous research, a common mentioned concept is the recovery rate, which means the percentage of materials recovered from feedstock, in weight or volume percentage. Yet with deeper understanding and the real need for resources, the recovery rate is not comprehensive enough to describe the extent of recycling due to the fact that it is not capable of reflecting the required purity of the products, as for some techniques the recovery rate is very high (>90%) while the product purity is particularly low, including several components with concentrations between 20 and 40%. These products are actually incapable of being used or sold to the market directly, which need further separation or refining. However, in the evaluation of the process, the cost and environmental effects are not ascribed to the technique itself but are transferred to the uncertain downstream treatment. Thus, the performance of the technology can be overestimated or underestimated. Therefore, in this work, a new criteria was first raised named "gate-to-market ability", which means the ability of the products to be sold or used in a real industry application

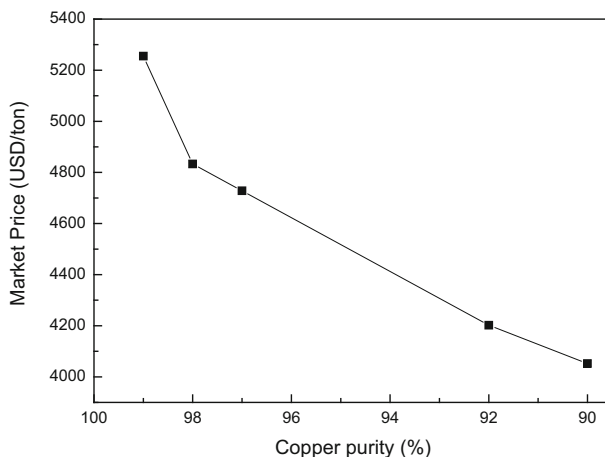



Fig. 10 Market price of copper with different purity (collected on January 21, 2016)

after it has been produced by the technique. It is obvious that the purity of the products will be significantly affected by their gate-to-market ability of them, for some recycling produces even a slightly lower purity will cause them to be discarded.

The market price of copper, a common recycling product of WPCB, is seriously affected by their purity, as shown in Fig. 10 where the prices of copper were collected from several copper markets over the world on January 21, 2016. It can be concluded from the figure that a small decrease in purity (from 99 to 90%) will cause a sharp drop in the unit price of around 22.89% when the purity is decreased. However, the copper recovered from the above-mentioned technology is normally around 70%, except corona electrostatic separation, which means the margin of profit is cut a lot or even not applicable without further refinery. The following process will add both an economic and environmental burden to the techniques. Therefore, gate-to-market ability is a criterion independent of economical and environmental perspective and plays an important role in the evolution of the feasibility of the process.

Normally, hydrometallurgy recycling techniques will give low gate-to-market ability due to the form of products, which are normally alloys. Generally, hydrometallurgy recycling techniques and mechanical separation can provide products with good gate-to-market ability since the products of these processes can

Fig. 11 The relationship for three factors on technology evaluation. This triangle actually does not exist, indicating the impossibility of achieving these three criteria simultaneously

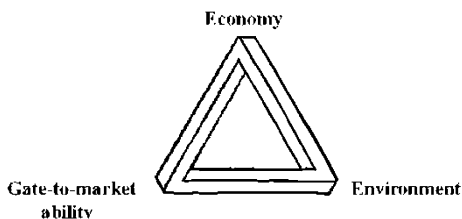

achieve high purity beyond 90%, which reduces the difficulty of further application. Still, co-precipitation in hydrometallurgy will reduce the gate-to-market ability since the product will have several kinds of components inside.

7 Conclusions

WPCB is dangerous waste, but at the same time a rich resource for various kinds of materials. The recycling technologies of WPCB divided into direct treatment (landfill and incineration), primitive recycling technology (pyrometallurgy, hydrometallurgy, biometallurgy and primitive full recovery of NMF), and advanced recycling technology (mechanic separation, directly use and modification of NMF) were studied and analyzed to access their advantages and disadvantages. This review shows that direct treatment has advantages on their simplicity of treatment but the environmental problem is a big issue for them. Primitive recycling techniques achieve a certain extent of recycling, mainly the MF of WPCB. However, the energy consumption as well as the waste gas and water emission still remain a problem for the application of them. Advanced recycling techniques can separate the MF and NMF of WPCB with minimum effects on the environment with a good gate-to-market ability while the energy consumption is huge for them. Therefore, the direct use and modification of NMF was studied to remedy the cost from the energy consumption and become the concern of WPCB recycling.

To summarize, a triangle figure of economy perspective, environmental perspective, and gate-to-market ability perspective can be set as shown in Fig. 11. However, the discussion indicates that the three criteria cannot be satisfied with one simple technique. Therefore, the future research direction of WPCB recycling should focus on the combination of several techniques or in series recycling since the drawback of a process could have a chance to be remedied by one of the techniques and the evaluation should be conducted on the whole process until the products satisfy the market standard.

References

1. Gu Y, Wu Y, Xu M, Mu X, Zuo T (2016) Waste electrical and electronic equipment (WEEE) recycling for a sustainable resource supply in the electronics industry in China. *J Clean Prod* 127:331–338
2. Williams PT (2010) Valorization of printed circuit boards from waste electrical and electronic equipment by pyrolysis. *Waste Biomass Valorization* 1:107–120
3. Hadi P, Ning C, Ouyang W, Lin SK, Hui CW, McKay G (2014) Conversion of an aluminosilicate-based waste material to high-value efficient adsorbent. *Chem Eng J* 256:415–420
4. Lee CH, Chang SL, Wang KM, Wen LC (2000) Management of scrap computer recycling in Taiwan. *J Hazard Mater* 73:209–220
5. Flandinet L, Tedjar F, Ghetta V, Fouletier J (2012) Metals recovering from waste printed circuit boards (WPCBs) using molten salts. *J Hazard Mater* 213–214:485–490
6. Quan C, Li A, Gao N (2013) Combustion and pyrolysis of electronic waste: thermogravimetric analysis and kinetic model. *Procedia Environ Sci* 18:776–782

7. Draft proposal for a European parliament and council directive on waste electric and electronic equipment. Brussels
8. Ghosh B, Ghosh MK, Parhi P, Mukherjee PS, Mishra BK (2015) Waste printed circuit boards recycling: an extensive assessment of current status. *J Clean Prod* 94:5–19
9. He Y, Xu Z (2014) The status and development of treatment techniques of typical waste electrical and electronic equipment in China: a review. *Waste Manag Res* 32:254–269
10. Kumari A, Kumari A, Jha MK, Kumar V, Singh RP, Yoo K (2014) Copper recovery from small devices populated on waste printed circuit boards. *J Metall Mater Sci* 56:41–51
11. Zeng X, Zheng L, Xie H, Lu B, Xia K, Chao K, Li W, Yang J, Lin S, Li J (2012) Current status and future perspective of waste printed circuit boards recycling. *Procedia Environ Sci* 16:590–597
12. Das A, Vidyadhar A, Mehrotra SP (2009) A novel flowsheet for the recovery of metal values from waste printed circuit boards. *Resour Conserv Recycl* 53:464–469
13. Hadi P, Ning C, Ouyang W, Xu M, Lin SK, McKay G (2014) Toward environmentally-benign utilization of nonmetallic fraction of waste printed circuit boards as modifier and precursor. *Waste Manag* 35:236–246
14. Akcil A, Erust C, Gahan CS, Ozgun M, Sahin M, Tuncuk A (2015) Precious metal recovery from waste printed circuit boards using cyanide and non-cyanide lixivants—a review. *Waste Manag* 45:258–271
15. De Marco I, Caballero BM, Chomôn MJ, Laresgoiti MF, Torres A, Fernández G, Arnaiz S (2008) Pyrolysis of electrical and electronic wastes. *J Anal Appl Pyrolysis* 82:179–183
16. Jie G, Ying-Shun L, Mai-Xi L (2008) Product characterization of waste printed circuit board by pyrolysis. *J Anal Appl Pyrolysis* 83:185–189
17. Marsanich K, Zanelli S, Barontini F, Cozzani V (2004) Evaporation and thermal degradation of tetrabromobisphenol A above the melting point. *Thermochim Acta* 421:95–103
18. Luda MP, Balabanovich AI, Hornung A, Camino G (2003) Thermal degradation of a brominated bisphenol A derivative. *Polym Adv Technol* 14:741–748
19. Li J, Lu H, Liu S, Xu Z (2008) Optimizing the operating parameters of corona electrostatic separation for recycling waste scraped printed circuit boards by computer simulation of electric field. *J Hazard Mater* 153:269–275
20. Insititute of scrap recycling industries Inc. (2003) Scrap recycling: where tomorrow begins. Washington DC, USA
21. La Brooy SR, Linge HG, Walker GS (1994) Review of gold extraction from ores. *Miner Eng* 7:1213–1241
22. Heath JA, Jeffrey MI, Zhang HG, Rumball JA (2008) Anaerobic thiosulfate leaching: development of in situ gold leaching systems. *Miner Eng* 21:424–433
23. Yen W T XC (2008) Effects of copper minerals on ammoniacal thiosulfate leaching of gold. *Proceeding XX IV Int. Miner. Process. Congr.*
24. Ilyas S, Anwar MA, Niazi SB, Afzal Ghauri M (2007) Bioleaching of metals from electronic scrap by moderately thermophilic acidophilic bacteria. *Hydrometallurgy* 88:180–188
25. Faramarzi MA, Stagars M, Pensini E et al (2004) Metal solubilization from metal-containing solid materials by cyanogenic *Chromobacterium violaceum*. *J Biotechnol* 113:321–326
26. Choi M-S, Cho K-S, Kim D-JD-S, Kim D-JD-S (2004) Microbial recovery of copper from printed circuit boards of waste computer by *Acidithiobacillus ferrooxidans*. *J Environ Sci Heal Part A-Toxic/Hazardous Subst Environ Eng* 39:2973–2982
27. Duan C, Sheng C, Wu L, Zhao Y, He J, Zhou E (2014) Separation and recovery of fine particles from waste circuit boards using an inflatable tapered diameter separation bed. *Sci World*
28. Shapiro M, Galperin V (2005) Air classification of solid particles: a review. *Chem Eng Process Process Intensif* 44:279–285
29. RI S (1996) Recycling and resources recovery engineering. Springer, Berlin
30. Li J, Xu Z, Zhou Y (2007) Application of corona discharge and electrostatic force to separate metals and nonmetals from crushed particles of waste printed circuit boards. *J Electrostat* 65:233–238
31. Guo J, Cao B, Guo J, Xu Z (2008) A plate produced by nonmetallic materials of pulverized waste printed circuit boards. *Environ Sci Technol* 42:5267–5271
32. Guo J, Guo J, Cao B, Tang Y, Xu Z (2009) Manufacturing process of reproduction plate by nonmetallic materials reclaimed from pulverized printed circuit boards. *J Hazard Mater* 163:1019–1025
33. Yokoyama S, Iji M (1995) Recycling of thermosetting plastic waste from electronic component production processes. In: *Proceedings 1995 IEEE Int. Symp.*, pp 132–137

34. Mou P, Xiang DDG (2007) Products made from nonmetallic materials reclaimed from waste printed circuit boards. *Tsinghua Sci Technol* 12:276–283
35. Ban BC, Song JY, Lim JY, Wang SK, An KG, Kim DS (2005) Studies on the reuse of waste printed circuit board as an additive for cement mortar. *J Env Sci Heal A Tox Hazard Subst Env Eng* 40:645–656
36. Goosey M, Kellner R (2003) Recycling technologies for the treatment of end of life printed circuit boards (PCBs). *Circuit World* 29:33–37
37. Hadi P, Ning C, Ouyang W, Lin SK, Hui CW, McKay G (2014) Conversion of an aluminosilicate-based waste material to high-value efficient adsorbent. *Chem Eng J* 256:415–420
38. Hu SH, Wu JY, Yen FS, Tsai MS (2006) Alkaline leaching of printed circuit board sludge. *Environ Prog* 25:243–250
39. Cui J, Forssberg E (2003) Mechanical recycling of waste electric and electronic equipment: a review. *J Hazard Mater* 99:243–263
40. Huang K, Guo J, Xu Z (2009) Recycling of waste printed circuit boards: a review of current technologies and treatment status in China. *J Hazard Mater* 164:399–408
41. Hall WJ, Williams PT (2007) Separation and recovery of materials from scrap printed circuit boards. *Resour Conserv Recycl* 51:691–709
42. Yamane LH, de Moraes VT, Espinosa DCR, Tenório JAS (2011) Recycling of WEEE: characterization of spent printed circuit boards from mobile phones and computers. *Waste Manag* 31:2553–2558
43. Hadi P, Xu M, Lin CSK, Hui CW, McKay G (2015) Waste printed circuit board recycling techniques and product utilization. *J Hazard Mater* 283:234–243
44. Menad N, Björkman B, Allain EG (1998) Combustion of plastics contained in electric and electronic scrap. *Resour Conserv Recycl* 24:65–85
45. Malhotra SC (1985) Trends and opportunities in electronic scrap reclamation. *Conserv Recycl* 8:327–333
46. Vijayaram R, Nesakumar D, Chandramohan K (2013) Copper extraction from the discarded printed circuit boards by leaching. *Res J Eng Sci* 2:11–14
47. Jha MK, Kumari A, Choubey PK, Lee JC, Kumar V, Jeong J (2012) Leaching of lead from solder material of waste printed circuit boards (PCBs). *Hydrometallurgy* 121–124:28–34
48. Chancerel P, Rotter S (2009) Recycling-oriented characterization of small waste electrical and electronic equipment. *Waste Manag* 29:2336–2352
49. Zhou Y, Qiu K (2010) A new technology for recycling materials from waste printed circuit boards. *J Hazard Mater* 175:823–828
50. Park YJ, Fray DJ (2009) Recovery of high purity precious metals from printed circuit boards. *J Hazard Mater* 164:1152–1158
51. Evangelopoulos P, Kantarelis E, Yang W (2015) Investigation of the thermal decomposition of printed circuit boards (PCBs) via thermogravimetric analysis (TGA) and analytical pyrolysis (Py-GC/MS). *J Anal Appl Pyrolysis* 115:337–343
52. Fogarasi S, Imre-Lucaci F (2014) Copper recovery and gold enrichment from waste printed circuit boards by mediated electrochemical oxidation. *J Hazard Mater* 273:215–221
53. Behnamfar A, Salarirad MM, Veglio F (2013) Process development for recovery of copper and precious metals from waste printed circuit boards with emphasize on palladium and gold leaching and precipitation. *Waste Manag* 33:2354–2363
54. Silvas FPC, Jiménez Correa MM, Caldas MPK, Moraes VT, Espinosa DCR, Tenório JAS (2015) Printed circuit board recycling: physical processing and copper extraction by selective leaching. *Waste Manag* 46:503–510
55. Xing M, Zhang FS (2013) Degradation of brominated epoxy resin and metal recovery from waste printed circuit boards through batch sub/supercritical water treatments. *Chem Eng J* 219:131–136
56. Calgaro CO, Schlemmer DF, da Silva MDCR et al (2015) Fast copper extraction from printed circuit boards using supercritical carbon dioxide. *Waste Manag* 45:289–297
57. He W, Li G, Ma X, Wang H, Huang J, Xu M, Huang C (2006) WEEE recovery strategies and the WEEE treatment status in China. *J Hazard Mater* 136:502–512
58. Yoo JM, Jeong J, Yoo K, Lee JC, Kim W (2009) Enrichment of the metallic components from waste printed circuit boards by a mechanical separation process using a stamp mill. *Waste Manag* 29:1132–1137

59. Hadi P, Ning C, Kubicki JD, Mueller K, Fagan JW, Luo ZT, Weng LT, McKay G (2016) Sustainable development of a surface-functionalized mesoporous aluminosilicate with ultra-high ion exchange efficiency. *Inorg Chem Front* 3:502–513
60. Li J, Duan H, Yu K, Liu L, Wang S (2010) Characteristic of low-temperature pyrolysis of printed circuit boards subjected to various atmosphere. *Resour Conserv Recycl* 54:810–815
61. Hoffmann JE (1992) Recovering precious metals from electronic scrap. *J Miner Met Mater Soc* 44:43–48
62. Kopacek B, Kopacek P (2015) Extracting rare materials from electr(on)ic scrap. *IFAC-Papers-OnLine* 48:157–161
63. Lindberg SE, Wallschläger D, Prestbo EM, Bloom NS, Price J, Reinhart D (2001) Methylated mercury species in municipal waste landfill gas sampled in Florida, USA. *Atmos Environ* 35:4011–4015
64. Spalvins E, Dubey B, Townsend T (2008) Impact of electronic waste disposal on lead concentrations in landfill leachate. *Environ Sci Technol* 42:7452–7458
65. Osako M, Kim YJ, Sakai SI (2004) Leaching of brominated flame retardants in leachate from landfills in Japan. *Chemosphere* 57:1571–1579
66. Wong CSC, Wu SC, Duzgoren-Aydin NS, Aydin A, Wong MH (2007) Trace metal contamination of sediments in an e-waste processing village in China. *Environ Pollut* 145:434–442
67. Kang HY, Schoenung JM (2005) Electronic waste recycling: a review of US infrastructure and technology options. *Resour Conserv Recycl* 45:368–400
68. Kang HY, Schoenung JM (2006) Economic analysis of electronic waste recycling: modeling the cost and revenue of a materials recovery facility in California. *Environ Sci Technol* 40:1672–1680
69. Davis G, Herat S (2008) Electronic waste: the local government perspective in Queensland, Australia. *Resour Conserv Recycl* 52:1031–1039
70. Tanskanen P (2013) Management and recycling of electronic waste. *Acta Mater* 61:1001–1011
71. USEPA (US (2007) Management of Electronic Waste in the United States
72. Guo J, Guo J, Xu Z (2009) Recycling of non-metallic fractions from waste printed circuit boards: a review. *J Hazard Mater* 168:567–590
73. Komilis D, Evangelou A, Giannakis G, Lymperis C (2012) Revisiting the elemental composition and the calorific value of the organic fraction of municipal solid wastes. *Waste Manag* 32:372–381
74. Oguchi M, Sakanakura H, Terazono A (2013) Toxic metals in WEEE: characterization and substance flow analysis in waste treatment processes. *Sci Total Environ* 463–464:1124–1132
75. Tange L, Drohmann D (2005) Waste electrical and electronic equipment plastics with brominated flame retardants—from legislation to separate treatment—thermal processes. *Polym Degrad Stab* 88:35–40
76. Long YY, Feng YJ, Cai SS, Ding WX, Shen DS (2013) Flow analysis of heavy metals in a pilot-scale incinerator for residues from waste electrical and electronic equipment dismantling. *J Hazard Mater* 261:427–434
77. Duan H, Li J, Liu Y, Yamazaki N, Jiang W (2011) Characterization and inventory of PCDD/Fs and PBDD/Fs emissions from the incineration of waste printed circuit board. *Environ Sci Technol* 45:6322–6328
78. Sakai SI, Watanabe J, Honda Y, Takasuki H, Aoki I, Futamatsu M, Shiozaki K (2001) Combustion of brominated flame retardants and behavior of its byproducts. *Chemosphere* 42:519–531
79. Ni M, Xiao H, Chi Y, Yan J, Buekens A (2012) Combustion and inorganic bromine emission of waste printed circuit boards in a high temperature furnace. *Waste Manag* 32:568–574
80. Oguchi M, Sakanakura H, Terazono A, Takigami H (2012) Fate of metals contained in waste electrical and electronic equipment in a municipal waste treatment process. *Waste Manag* 32:96–103
81. Bidini G, Fantozzi F, Bartocci P, D'Alessandro B, D'Amico M, Laranci P, Scozza E, Zagaroli M (2015) Recovery of precious metals from scrap printed circuit boards through pyrolysis. *J Anal Appl Pyrolysis* 111:140–147
82. Yang X, Sun L, Xiang J, Hu S, Su S (2013) Pyrolysis and dehalogenation of plastics from waste electrical and electronic equipment (WEEE): a review. *Waste Manag* 33:462–473
83. Ortuño N, Conesa JA, Moltó J, Font R (2014) Pollutant emissions during pyrolysis and combustion of waste printed circuit boards, before and after metal removal. *Sci Total Environ* 499:27–35
84. Barontini F, Marsanich K, Petarca L, Cozzani V (2004) The thermal degradation process of tetrabromobisphenol A. *Ind Eng Chem Res* 43:1952–1961

85. Barontini F, Cozzani V, Marsanich K, Raffa V, Petarca L (2004) An experimental investigation of tetrabromobisphenol A decomposition pathways. *J Anal Appl Pyrolysis* 72:41–53
86. Lai YC, Lee WJ, Li HW, Wang LC, Ping G, Chien C (2007) Inhibition of polybrominated dibenzo-p-dioxin and dibenzofuran formation from the pyrolysis of printed circuit boards. *Environ Sci Technol* 41:957–962
87. Kim YM, Han TU, Watanabe C, Teramae N, Park YK, Kim S, Hwang B (2015) Analytical pyrolysis of waste paper laminated phenolic-printed circuit board (PLP-PCB). *J Anal Appl Pyrolysis* 115:87–95
88. Kumari A, Jha MK, Lee JC, Singh RP (2016) Clean process for recovery of metals and recycling of acid from the leach liquor of PCBs. *J Clean Prod* 112:4826–4834
89. Terakado O, Ohhashi R, Hirasawa M (2013) Bromine fixation by metal oxide in pyrolysis of printed circuit board containing brominated flame retardant. *J Anal Appl Pyrolysis* 103:216–221
90. Guo X, Qin FGF, Yang X, Jiang R (2014) Study on low-temperature pyrolysis of large-size printed circuit boards. *J Anal Appl Pyrolysis* 105:151–156
91. Cayumil R, Khanna R, Rajarao R, Mukherjee PS, Sahajwalla V (2015) Concentration of precious metals during their recovery from electronic waste. *Waste Manag* 57:121–130
92. Benallal B, Roy C, Pakdel H, Chabot S, Poirier MA (1995) Characterization of pyrolytic light naphtha from vacuum pyrolysis of used tyres. Comparison with petroleum naphtha. *Fuel* 74:1589–1594
93. Long L, Sun S, Zhong S, Dai WC, Liu JY, Song WF (2010) Using vacuum pyrolysis and mechanical processing for recycling waste printed circuit boards. *J Hazard Mater* 177:626–632
94. Wu W, Qiu K (2015) Vacuum co-pyrolysis of Chinese fir sawdust and waste printed circuit boards. Part II: influence of heating conditions. *J Anal Appl Pyrolysis* 111:216–223
95. Zhou Y, Wu W, Qiu K (2010) Recovery of materials from waste printed circuit boards by vacuum pyrolysis and vacuum centrifugal separation. *Waste Manag* 30:2299–2304
96. Mitan NMM, Bhaskar T, Hall WJ, Muto A, Williams PT (2008) Effect of decabromodiphenyl ether and antimony trioxide on controlled pyrolysis of high-impact polystyrene mixed with polyolefins. *Chemosphere* 72:1073–1079
97. Havlik T, Orac D, Petranikova M, Miskufova A (2011) Hydrometallurgical treatment of used printed circuit boards after thermal treatment. *Waste Manag* 31:1542–1546
98. Liu JY, Duan NYHY (2010) Study on the metals dissolving from waste printed circuit boards by using nitric acid as leaching liquor. *Environ Pollut Control* 12:35–38
99. Jun W, Liang C, Lijuan LQ (2008) Study on selectively leaching gold from waste printed circuit boards with thiourea. *Gold* 6:17
100. Kinoshita T, Akita S, Kobayashi N, Nii S, Kwaizumi F, Takahashi K (2003) Metal recovery from non-mounted printed wiring boards via hydrometallurgical processing. *Hydrometallurgy* 69:73–79
101. Qiu KQ, Gu HCS (2008) Characteristics of metals resources and status of hydrometallurgical processes for recycling metals from waste printed circuit boards. *Chinese J Nonferrous Met* 18:s381–s385
102. Mankhand TR, Singh KK, Gupta SK, Das S (2013) Pyrolysis of printed circuit boards. *Int J Metall Eng* 1:102–107
103. Mecucci A, Scott K (2002) Leaching and electrochemical recovery of copper, lead and tin from scrap printed circuit boards. *J Chem Technol Biotechnol* 77:449–457
104. Sheng PP, Etsell TH (2007) Recovery of gold from computer circuit board scrap using aqua regia. *Waste Manag Res* 25:380–383
105. Chmielewski AG, Urbański TS, Migdał W (1997) Separation technologies for metals recovery from industrial wastes. *Hydrometallurgy* 45:333–344
106. Zhou QFZW (2003) Recovery of gold from waste computer and its accessories. *China Resour Compr Util* 7:31–35
107. Quinet P, Proost J, Lierde A Van (2005) Minerals and Metallurgical Processing, 22 (1):17. 994740
108. Becker E, Knothe MLJ (1983) Gold recovery from non-metallic secondary raw materials by leaching with thiourea and adsorption on ion exchangers. *Hydrometallurgy* 3:265–275
109. Xu XL LJ (2011) Experimental study of thiourea leaching gold and silver from waste circuit boards. *J Qingdao Univ (E&T)*, 69–73
110. Moore DM, Zhang XR, Li CX. (2005) Using thiosulfate as a leach reagents instead of cyanide. *Met Ore Dress Abroad* 5–12
111. Ha VH, Lee J, Jeong J, Hai HT, Jha MK (2010) Thiosulfate leaching of gold from waste mobile phones. *J Hazard Mater* 178:1115–1119

112. Abbruzzese C, Fornari P, Massidda R, Vegliò F, Ubaldini S (1995) Thiosulphate leaching for gold hydrometallurgy. *Hydrometallurgy* 39:265–276
113. Xu Q, Chen DH, Chen L, Huang M (2010) Gold leaching from waste printed circuit board by iodine process. *Nonferrous Met.* 3:335–343
114. Birloaga I, De Michelis I, Ferella F, Buzatu M, Vegliò F (2013) Study on the influence of various factors in the hydrometallurgical processing of waste printed circuit boards for copper and gold recovery. *Waste Manag* 33:935–941
115. Deveci H. (2010) Extraction of copper from scrap TV boards by sulphuric acid leaching under oxidising conditions. In: *GOING GREEN-CARE Innov. 2010 Conf.* Vienna, p 45
116. Kumari A, Jha MK, Singh RP (2015) Recovery of metals from pyrolysed PCBs by hydrometallurgical techniques. *Hydrometallurgy* 165:97–105
117. Havlik T, Orac D, Petranikova M, Miskulova A, Kukurugya F, Takacova Z (2010) Leaching of copper and tin from used printed circuit boards after thermal treatment. *J Hazard Mater* 183:866–873
118. Kim EY, Kim MS, Lee JC, Pandey BD (2011) Selective recovery of gold from waste mobile phone PCBs by hydrometallurgical process. *J Hazard Mater* 198:206–215
119. Ehrlich HL (2001) Past, present and future of biohydrometallurgy. *Hydrometallurgy* 59:127–134
120. Boserker K (1997) Bioleaching: metal solubilization by microorganisms. *FEMS Microbiol Rev* 20:591–604
121. Rawlings DE (2002) Heavy metal mining using microbes. *Annu Rev Microbiol* 56:65–91
122. Morris PJ, Quensen JF, Tiedje JM, Boyd SA (1992) Reductive debromination of the commercial polybrominated biphenyl mixture Firemaster BP6 by anaerobic microorganisms from sediments. *Appl Environ Microbiol* 58:3249–3256
123. Liang G, Tang J, Liu W, Zhou Q (2013) Optimizing mixed culture of two acidophiles to improve copper recovery from printed circuit boards (PCBs). *J Hazard Mater* 250–251:238–245
124. Ilyas S, Ruan C, Bhatti HN, Ghauri MH, Anwar MH (2010) Column bioleaching of metals from electronic scrap. *Hydrometallurgy* 101:135–140
125. Yang T, Xu Z, Wen J, Yang L (2009) Factors influencing bioleaching copper from waste printed circuit boards by *Acidithiobacillus ferrooxidans*. *Hydrometallurgy* 97:29–32
126. Yen-Peng Ting, Chi Chong Tan VAP (2008) Cyanide-generating bacteria for gold recovery from electronic scrap material. *J Biotechnol* 136:S653–S654
127. Marhual NP, Pradhan N, Kar RN, Sukla LB, Mishra BK (2008) Differential bioleaching of copper by mesophilic and moderately thermophilic acidophilic consortium enriched from same copper mine water sample. *Bioresour Technol* 99:8331–8336
128. Sampson MI, Phillips CV (2001) Influence of base metals on the oxidizing ability of acidophilic bacteria during the oxidation of ferrous sulfate and mineral sulfide concentrates, using mesophiles and moderate thermophiles. *Miner Eng* 14:317–340
129. Brandl H, Bosshard R, Wegmann M (1999) Computer-munching microbes: metal leaching from electronic scrap by bacteria and fungi. *Process Metall* 9:569–576
130. Zhu N, Xiang Y, Zhang T, Wu P, Dang Z, Li P, Wu J (2011) Bioleaching of metal concentrates of waste printed circuit boards by mixed culture of acidophilic bacteria. *J Hazard Mater* 192:614–619
131. Search H, Journals C, Contact A, DC Arc Plasma Disposal of Printed Circuit Board * System of the DC arc plasma disposal of solid waste. 2423
132. Liu K, Zhang Z, Zhang F-S (2016) Advanced degradation of brominated epoxy resin and simultaneous transformation of glass fiber from waste printed circuit boards by improved supercritical water oxidation processes. *Waste Manag* 56:423–430
133. Wang H, Hirahara M, Goto M, Hirose T (2004) Extraction of flame retardants from electronic printed circuit board by supercritical carbon dioxide. *J Supercrit Fluids* 29:251–256
134. Xiu FR, Zhang FS (2010) Materials recovery from waste printed circuit boards by supercritical methanol. *J Hazard Mater* 178:628–634
135. Xiu F-R, Weng H, Qi Y, Yu G, Zhang Z, Zhang FS (2016) A novel reutilization method for waste printed circuit boards as flame retardant and smoke suppressant for poly (vinyl chloride). *J Hazard Mater* 315:102–109
136. Xiu FR, Qi Y, Zhang FS (2015) Leaching of Au, Ag, and Pd from waste printed circuit boards of mobile phone by iodide lixiviant after supercritical water pre-treatment. *Waste Manag* 41:134–141
137. Xiu FR, Zhang FS (2012) Size-controlled preparation of Cu₂O nanoparticles from waste printed circuit boards by supercritical water combined with electrokinetic process. *J Hazard Mater* 233–234:200–206

138. Xiu FR, Zhang FS (2009) Preparation of nano-Cu₂O/TiO₂ photocatalyst from waste printed circuit boards by electrokinetic process. *J Hazard Mater* 172:1458–1463
139. Sanyal S, Ke Q, Zhang Y, Ngo T, Carrell J, Zhang H, Dai I (2013) Understanding and optimizing delamination/recycling of printed circuit boards using a supercritical carbon dioxide process. *J Clean Prod* 41:174–178
140. Xing M, Zhang F (2012) A novel process for detoxification of BERs in waste {PCBs}. *Procedia Environ Sci* 16:491–494
141. Yin J, Li G, He W, Huang J, Xu M (2011) Hydrothermal decomposition of brominated epoxy resin in waste printed circuit boards. *J Anal Appl Pyrolysis* 92:131–136
142. Sarvar M, Salarirad MM, Shabani MA (2015) Characterization and mechanical separation of metals from computer printed circuit boards (PCBs) based on mineral processing methods. *Waste Manag* 45:246–257
143. Eswaraiah C, Kavitha T, Vidyasagar S, Narayanan SS (2008) Classification of metals and plastics from printed circuit boards (PCB) using air classifier. *Chem Eng Process Process Intensif* 47:565–576
144. Habib M, Miles NJ, Hall P (2013) Recovering metallic fractions from waste electrical and electronic equipment by a novel vibration system. *Waste Manag* 33:722–729
145. Kumar V, Lee J, Jeong J, Jha MK, Kim BS, Singh R (2015) Recycling of printed circuit boards (PCBs) to generate enriched rare metal concentrate. *J Ind Eng Chem* 21:805–813
146. Zhang S, Forssberg E, Arvidson B, Moss W (1998) Aluminum recovery from electronic scrap by high-force eddy-current separators. *Resour Conserv Recycl* 23:225–241
147. WL. D (1990) Practical applications of eddy current separators in the scrap recycling industry. *Second Int. Symp. Met. Eng. Mater*
148. Li J, Lu H, Guo J, Xu Z, Zhou Y (2007) Recycle technology for recovering resources and products from waste printed circuit boards. *Environ Sci Technol* 41:1995–2000
149. Jiang W, Jia L, Zhen-ming X (2009) A new two-roll electrostatic separator for recycling of metals and nonmetals from waste printed circuit board. *J Hazard Mater* 161:257–262
150. Zhao M, Li J, Yu K, Zhu F, Wen X (2006) Measurement of pyrolysis contamination during crushing of waste printed circuit boards. *J Tsinghua Univ Technol* 46:1995–1998
151. Guo J, Li J, Rao Q, Xu Z (2008) Phenolic molding compound filled with nonmetals of waste PCBs. *Environ Sci Technol* 42:624–628
152. Guo J, Rao Q, Xu Z (2008) Application of glass-nonmetals of waste printed circuit boards to produce phenolic moulding compound. *J Hazard Mater* 153:728–734
153. Zheng Y, Shen Z, Cai C, Ma S, Xing Y (2009) The reuse of nonmetals recycled from waste printed circuit boards as reinforcing fillers in the polypropylene composites. *J Hazard Mater* 163:600–606
154. Niu X, Li Y (2007) Treatment of waste printed wire boards in electronic waste for safe disposal. *J Hazard Mater* 145:410–416
155. Lu MX, Zhou CH, Liu WL (2000) The study of recovering waste printed circuit board by mechanical method. *Tech Equip Environ Pollut Control* 10:30–35
156. Ke YH, Yang ET, Liu X, Liu CL, Dong WS (2013) Preparation of porous carbons from non-metallic fractions of waste printed circuit boards by chemical and physical activation. *Xinxing Tan Cailiao/New Carbon Mater* 28:108–114
157. Rajagopal RR, Aravinda LS, Rajarao R, Bhat BR, Sahajwalla V (2016) Activated carbon derived from non-metallic printed circuit board waste for supercapacitor application. *Electrochim Acta* 211:488–498
158. Hadi P, Barford J, McKay G (2013) Toxic heavy metal capture using a novel electronic waste-based material-mechanism, modeling and comparison. *Environ Sci Technol* 47:8248–8255
159. Xu M, Hadi P, Chen G, McKay G (2014) Removal of cadmium ions from wastewater using innovative electronic waste-derived material. *J Hazard Mater* 273:118–123
160. Ning C, Hadi P, Lin CSK, McKay G (2016) Valorization of an electronic waste-derived aluminosilicate—surface functionalization and porous structure tuning. *ACS Sustain Chem Eng* 6:2980–2989
161. Pimenta S, Pinho ST (2011) Recycling carbon fibre reinforced polymers for structural applications: technology review and market outlook. *Waste Manag* 31:378–392
162. Burke A (2007) R&D considerations for the performance and application of electrochemical capacitors. *Electrochim Acta* 53:1083–1091
163. Ludwig Christian, Hellweg Stefanie, Samuel Stucki E (2012) Municipal solid waste management: strategies and technologies for sustainable solutions. Springer, Berlin



Chemical Valorization of Cashew Nut Shell Waste

E. B. Mubofu¹ · J. E. Mgaya¹

Received: 24 February 2017 / Accepted: 6 November 2017
© Springer International Publishing AG, part of Springer Nature 2018

Abstract Cashew nut shells are agro-wastes produced from cashew nut processing factories and contain about 30–35 wt% oil called cashew nut shell liquid (CNSL). This liquid is a mixture of four potential compounds, namely anacardic acid, cardanol, cardol and 2-methyl cardol. Various reactions have been developed to convert the components of cashew nut shell liquid into industrially important chemicals, and these materials are herein described. Such reactions employed in the transformation include transfer hydrogenation reactions, isomerization reactions, metathesis reactions, carbonylation reactions, polymerization reactions, isomerizing metathesis reaction, and isomerizing carbonylation reactions. Through these descriptions, one realizes that cashew nut shells are not a waste, but they are rather a good source of a potential liquid, CNSL, which is a promising renewable resource for synthesizing various industrial chemicals.

Keywords Cashew nut shells · Cashew nut shell liquid · Agro-wastes

1 Introduction

Cashew (*Anacardium occidentale*) is a tree native to Brazil, and it was introduced to other parts of the world in the sixteenth century, mainly with the intention of soil conservation. From its intended purpose to check soil erosion, the crop became a major foreign exchange earner in most countries [1, 2]. It is primarily

Chapter 3 was originally published as Mubofu, E. B. & Mgaya, J. E. Top Curr Chem (Z) (2018) 376: 8. <https://doi.org/10.1007/s41061-017-0177-9>.

✉ E. B. Mubofu
ebmubofu@udsm.ac.tz; ebmubofu@gmail.com

¹ Chemistry Department, University of Dar es Salaam, P.O. Box 35061, Dar es Salaam, Tanzania

Published online: 13 February 2018

Reprinted from the journal

grown on the continents of Asia, Africa and South America. Asian countries mainly include India, Vietnam, Indonesia, Philippines, Malaysia, Thailand and Sri-Lanka. The African countries producing cashew include Côte d'Ivoire, Nigeria, Tanzania, Mozambique, Kenya, Benin, Guinea-Bissau, Mozambique, Ghana, Senegal and Madagascar. Latin American countries producing cashew consist of Brazil, Columbia, Costa Rica, Honduras and El Salvador [2]. Cashew is mainly grown for its nuts, which have a well-established market in the United States and European Union countries with a great variety of uses. The other product, cashew apple, is generally processed and consumed locally.

Global cashew nut (with shells) production has increased every year until 2013, when the production reached 4.44 million tonnes compared to 3.21 million tonnes in 2005 (Fig. 1).

Cashew nuts consist of 35–45% kernels and around 55–65% shells. The cashew nut shells contain about 15–30% dark reddish brown viscous liquid called cashew nut shell liquid, and it is located in the honeycomb structure (Fig. 2).

The cashew kernels (edible nuts) are obtained from the raw nut after removal of the cashew shells. The extraction of the kernels from the nuts is traditionally done by putting the nuts in an open pan over an open fire and stirring continuously to avoid scorching. The roasted nuts are then thrown into sand to extinguish the fire. This makes the shell brittle, less corrosive and easy to break to remove the kernel. On an industrial scale, roasting is done by putting the nuts in a hot oil bath and then heating to 192 °C for about 90 s depending on the size of the nuts. During the roasting process, the cells of the shell break allowing CNSL to flow from the shells into the bath.

Cashew nut shell liquid (CNSL) is a byproduct of cashew nut processing factories with a composition of four unsaturated phenolic compounds namely anacardic acid, cardanol, cardol and traces of 2-methyl cardol (Fig. 3).

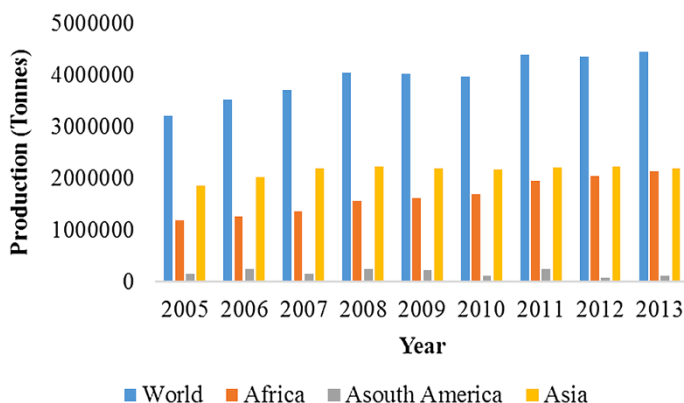


Fig. 1 Production and percentage share of cashew nut (with shells) by major producing regions Faostat 2016



Fig. 2 Picture of cashew nut shells showing a honeycomb structure

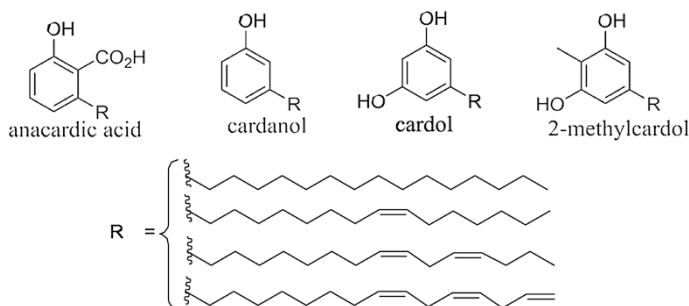


Fig. 3 Components of cashew nut shell liquid

2 Extraction of Cashew Nut Shell Liquid from the Cashew Nut Shells

Generally three methods are available for extraction of CNSL from cashew nut shells. The methods are solvent extraction, thermal extraction and mechanical extraction. The composition of CNSL differs depending on the method of extraction. Natural CNSL, which is extracted by using cold solvents or mechanical extraction contains anacardic acid (60–65%), cardanol (10–15%), cardol (20%) and traces of 2-methylcardol. On the other hand, technical cashew nut shell liquid is extracted by roasting the cashew nuts at higher temperature causing decarboxylation of most anacardic acid to cardanol as a major component (60–65%). Other CNSL components include cardol (15–20%), polymeric materials (10%) and traces of 2-methylcardol [3].

3 Solvent Extraction of CNSL

Solvent extraction is the best method when CNSL rich in anacardic acid is a target and generally yields more CNSL compared to other methods. Solvent extraction can be carried out via various approaches such as static solvent extraction [4], soxhlet extraction [5, 6], ultrasonic extraction, two-step extraction [7], sub-critical water (SCW) extraction [7], and supercritical carbon dioxide [8, 9]. Common solvents used in the extraction of CNSL include petroleum ether, carbon tetrachloride, hexane, cyclohexane, diethyl ether, xylene, ethyl acetate, toluene, ethanol, methanol and acetone. Polar solvents have been reported to give high amounts of extracted CNSL than non-polar solvents [10].

4 Thermal Extraction of CNSL

Thermal extraction involves roasting the nuts at 180–185 °C, which breaks the cells of the shell and cause the oil to ooze out of the shell. Thermal extraction can be achieved via open pan roasting, drum roasting and hot oil roasting. These higher temperatures used in the extraction, decarboxylate anacardic acid into cardanol. This makes the thermal extraction approach applicable if cardanol-rich CNSL is the target. The open pan roasting method the oil is removed by charring causing most of CNSL liquid being wasted. This method is generally not suitable considering the difficulty in collecting the oil. The hot oil bath method on the other hand is the most suitable method considering the viability of CNSL collection. In this method, the shells are immersed in a tank containing CNSL at high temperature. The cells of the shell break and lose their oil thereby increasing the volume of the oil in the tank [11, 12].

5 Mechanical Extraction Process

Mechanical method (screw press method) is a straightforward and quick method of extracting CNSL. It involves putting the raw cashew nut shells into a hydraulic screw press followed by exerting high pressure to release CNSL from shells [12]. An extraction experiment using this method was performed elsewhere [11] using a tapered compression screw, feeding rollers of transversal zigzag surface type and cylindrical casing with 2-mm diameter holes. The yield of CNSL extracted was reported to be between 20.65 and 21.04% containing 42% cardol, 47% anacardic acid and 3% Cardanol [13, 14]. One of the setbacks of this method is that the residues remaining after extraction still contained significant proportions of CNSL. Moreover, CNSL obtained via this method had higher levels of impurities and higher viscosity [13].

6 Applications of Cashew Nut Shell Liquid


CNSL have found a wide array of applications in various sectors. In the construction sector, CNSL is used for cementing floors to prevent chemical damage. In the laminating industry, CNSL is used to reduce brittleness and improve the flexibility of laminates. In the foundry industry, CNSL is a substitute for linseed oil in the manufacture of foundry core oil used as a binder. In automobiles, CNSL resins are used in brake lining. In the coating sector, CNSL is used in the production of curing agents for special epoxy hardeners and epoxy resins. Other applications of CNSL are as antioxidants, bactericides, fungicides, disinfectants, insecticides, dispersing and emulsifying agents, dye stuffs, ion exchange resins, surfactants, stabilizers, and curing agents.

7 Chemical Transformation of Cashew Nut Shell Liquid

The components of cashew nut shell liquid have functionalities in their structure that present several possibilities of converting it into industrial useful chemicals. The presence of double bond in their structure for instance allows chemical transformations via metathesis [15, 16], carbonylation [17], isomerization [18], ozonolysis [19], and polymerization reactions [20, 21]. In addition, the presence of phenolic group on these compounds allows transformation via esterification [22, 23] reactions, as well as reaction with aldehydes such as formaldehyde [23]. This review attempt to highlight techniques that have been developed in transforming cashew nut shell liquid components into valuable chemicals of diverse industrial interests.

8 Metathesis Reactions of Cardanol

The discovery of well-defined organometallic complex catalysts in olefin metathesis has led to a wide application of the reaction in research and industries for synthesis chemicals of interest. In appreciation to the contribution and the importance of metathesis reaction in organic synthesis, the 2005 Nobel Prize in Chemistry was awarded to the pioneers of olefin metathesis; Yves Chauvin, Robert H. Grubbs, and Richard R. One application where olefin metathesis is highly promising is in the transformation of biomasses such as plant oils into polymers and industrial fine chemicals [24, 25]. Investigations on metathesis reactions of cardanol have shown that industrially useful chemicals such as 1-octene and 3-nonylphenol can be synthesized by the metathesis reaction of cardanol with ethylene (ethenolysis) using the first generation catalysts (Scheme 1) [15]. Immobilized Hoveyda-Grubbs type Zhan catalyst (ZC) and Grubbs second generation catalysts on mesoporous materials have also been reported to be highly active

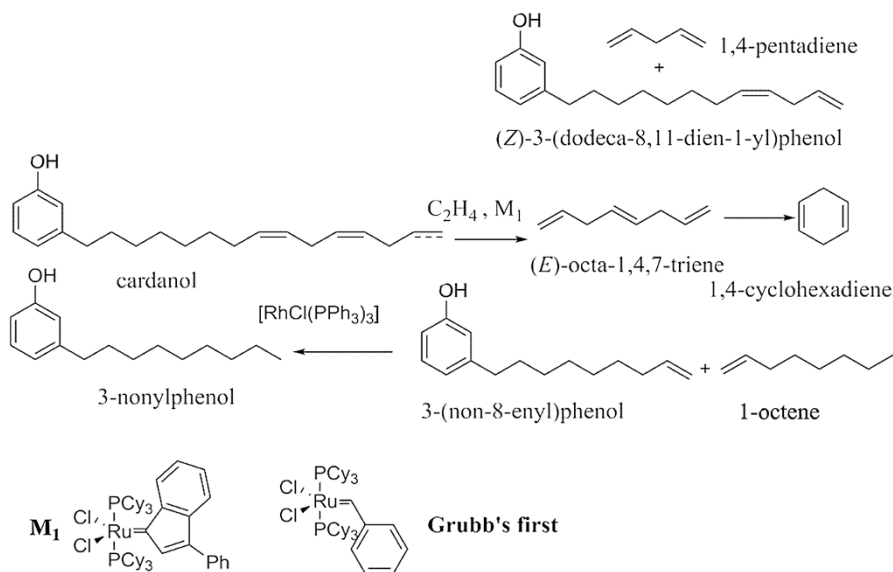



Scheme 1 Catalysed cardanol ethenolysis reaction

and selective in ethenolysis reaction of cardanol achieving TONs up to 2075 [16]. Immobilized catalysts are designed to enhance separation of products and catalysts.

9 Isomerization-Metathesis Reactions

The double bond at the C8 of the 15-carbon alkyl chain of cardanol can be isomerized to either side of the chain using a suitable catalytic system such as Pd/H⁺/DTBPMB. The isomerization reaction of cardanol produces double-bond positional isomers with a double bond located at any position in the chain (C1–C15), and the major isomer (40%) is that with the double bond at C1. The double bond of this isomer is a major product because it is stabilized by the conjugation of the benzene ring. Metathesis reaction of this isomer with *cis*-2-butene using a Hoveyda-Grubbs second-generation catalyst produces (*E*)-3-(prop-1-en-1-yl) phenol. Hydrogenation reactions of the latter product using 5% Pd/C produces 3-propylphenol (Scheme 2), which is a kairomone component used in tsetse fly traps [26].


Further optimisation on the synthesis of 3-propylphenol from cardanol have been achieved [27] by doing a one pot isomerisation metathesis reaction (Scheme 3). The reaction involves conversion of cardanol mixture (triene, diene and monoene) to 3-(non-8-enyl) phenol (98% purity) via ethenolysis and distillation. This is followed by isomerising cross-metathesis of the 3-(non-8-enyl)phenol with short-chain olefins in the presence of Pd-based isomerisation catalyst ([Pd(μ-Br)(tBu₃P)]₂) and a Ru-metathesis catalyst (Hoveyda type NHC catalyst) to produce 3-(prop-1-enyl)

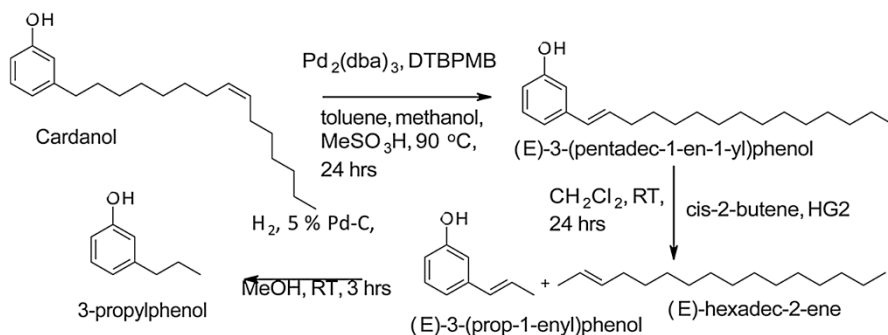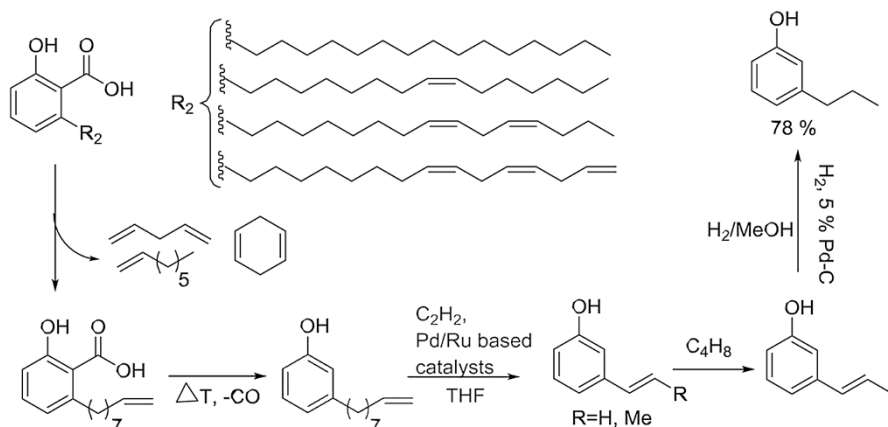**Scheme 2** Synthesis of 3-propylphenol from cardanol**Scheme 3** Synthesis of 3-propylphenol via isomerising-metathesis of 3-(non-8-enyl) phenol


phenol. Hydrogenation of the resulting phenol afford 3-propylphenol in good yield (78%) [27].

10 Isomerising-Carbonylation Reactions

The presence of the double bond in the alkyl chain of anacardic acid and cardanol brings about very interesting isomerization chemistry. These double bonds can be isomerized using appropriate catalytic systems such as Pd/DBPMB/MSA to form the double bond reaching the terminal end can be trapped by carbonylation in the presence of methanol to form an ester function [17]. Carbonylation of the internal double bond leads to formation of a branched ester. However, for bulk ligands such as DTBPMB, only double bonds reaching the terminal part are trapped by carbonylation to form linear esters. Bulk ligands such as DTBPMB enable a selective carbonylation towards linear esters. The catalytic system of Pd/DTBPMB/MSA has been reported to

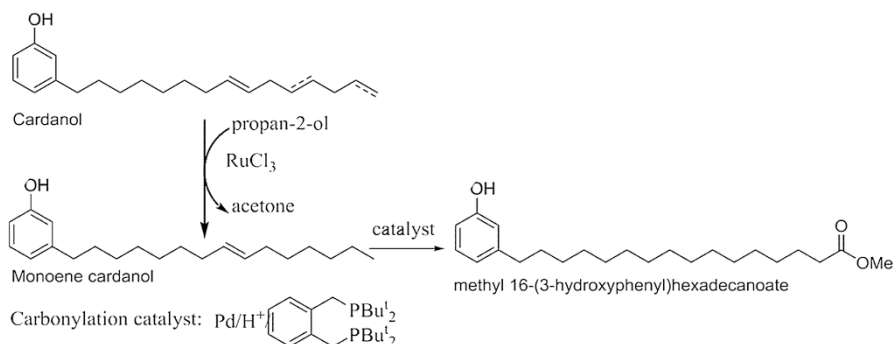

Scheme 4 Synthesis of methyl 16-(3-hydroxyphenyl)hexadecanoate from cardanol

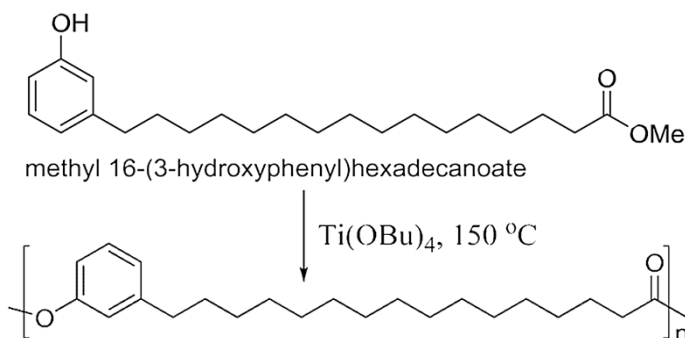


Scheme 5 Polymerisation of methyl 16-(3-hydroxyphenyl)hexadecanoate

be very effective for carbonylation of terminal and internal alkenes to produce linear esters in extremely high selectivity (99%) [28–31]. Similar carbonylation with this catalytic system on cardanol has produced methyl 16-(3-hydroxyphenyl) hexadecanoate (Scheme 4), which is a potential bifunctional monomer for synthesis of fire retardant polymers [17].

The potential advantage of methyl 16-(3-hydroxyphenyl) hexadecanoate synthesized from methoxycarbonylation of cardanol is that it is a bifunctional monomer that can be polymerized without the need of a second monomer (Scheme 5).

For other plant oils, methoxycarbonylation usually produce α - ω diesters which must be reduced to form dialcohols. The diesters are then copolymerized with dialcohols to form polyesters (Scheme 6) with properties more or less similar to polyethylene [28, 29].

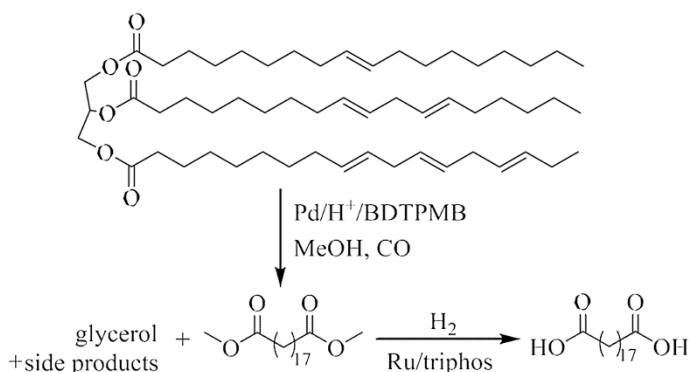


Scheme 6 Methoxycarbonylation of natural oils and the subsequent reduction of diesters

11 Metathesis-Carbonylation Reaction

An application of cardanol derived bifunctional monomers is to make fire retardant polymers. Polymers are organic compounds, thus they burn easily when exposed to intense heat. One way to synthesize intrinsic fire retardant polymers is to incorporate aromatic groups in the polymer backbone. Cardanol derived bifunctional monomers have phenyl group which qualify them for synthesis of fire retardant polymers [32, 33]. This implies that the greater the density of aromatic groups in the polymer backbone, the more heat resistant is the polymer. This can be achieved by shortening the C-15 alkyl chain of cardanol. Metathesis reaction of cardanol with symmetrical alkenes such as ethylene, cis-2-butene, trans-3-hexene and trans-4-octene produces shorter chain alkenylphenols consisting of C-9, C-10, C-11 and C-12, respectively (Scheme 7). Carbonylation of these derivatives produces shorter chain bifunctional monomers [17]. Polymerization of these monomers produce polymers that are intrinsically fire retardants due to their higher density of aromatic groups incorporated in the polymer chain. This is expected because the thermal stability and char yield of polymers containing aromatic groups in their backbone increase with the relative number of aromatic groups in the main chain. The high thermal stability of aromatic based polymers prevents the decomposition of polymers into combustible gases under intense heat, hence prevent the polymer from burning. On the other hand, char formation reduces polymer flammability by acting as a physical barrier to gaseous combustible products. The char has low thermal conductivity and therefore formation of char layer over the exposed surface, acts as thermal insulation to protect the polymer from burning [34].

12 Polymerization Reactions of Cardanol

Cardanol, which is the major component of technical CNSL has been the centre of attraction in the polymerisation reactions for the production of phenolic resins, epoxy resins, vinyl ester resins, phenalkamines and polyols [35–38]. The long


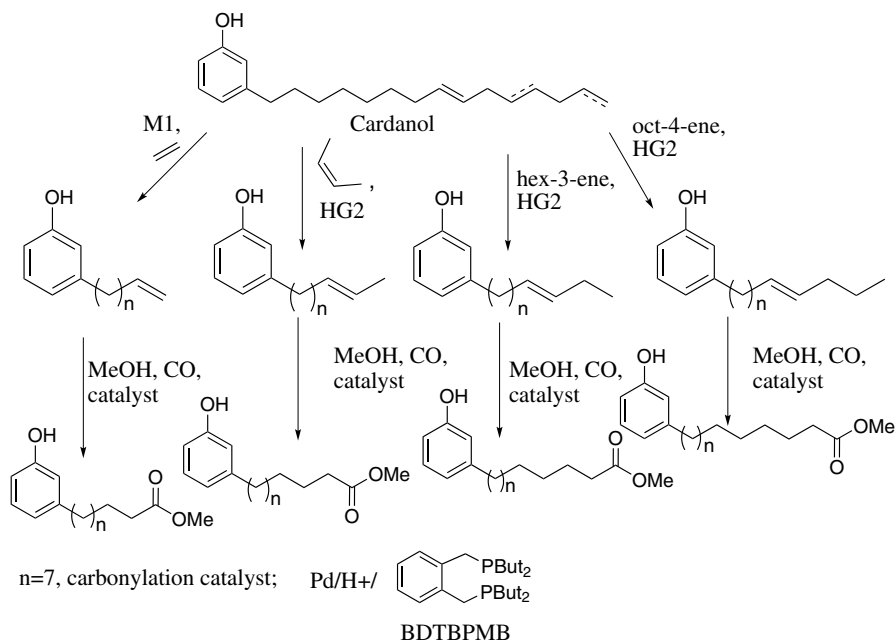



Scheme 7 Synthesis of shorter chain bifunctional monomers from cardanol

15-carbon alkyl chain in the meta position of the phenolic ring of cardanol offer attractive properties such as good processability and high solubility in organic solvents. Because of the phenolic group in cardanol, most cardanol derived resins are, therefore, fabricated using aldehydes [39–42]. The reaction takes advantage of the phenolic nature by reacting it with aldehydes such as formaldehyde to form phenolic resins. For instance, condensation of cardanol with formaldehyde (1:1 mol ratio) in the presence of sebacic acid catalyst affords a novalac-type phenolic resin. Epoxidation and hydrolysis of this resin, forms polyol, which can be condensed with other commercial polyol such as polypropylene glycol-1200 (PPG-1200) and hexamethylene diisocyanate to make polyurethanes (Scheme 8). More reactions on preparation of polyols from cardanol are summarized in (Scheme 9) [35].

13 Preparation of Chalcogenide Nanoparticles

The increase in environmental concerns has forced researchers to focus on green chemistry with great emphasis on the utilization of nontoxic chemicals, environmentally benign solvents and renewable materials. Recently, the field of nanotechnology have started focussing on green renewable chemicals for the generation of inorganic nanostructures and other nanomaterials. Anacardic acid, which is the major component of non-technical cashew nut shell liquid, has proven to be an effective capping agent in the fabrication of nanoarchitectures (Scheme 10) [44]. A recent study by Mubofu et al. [45]

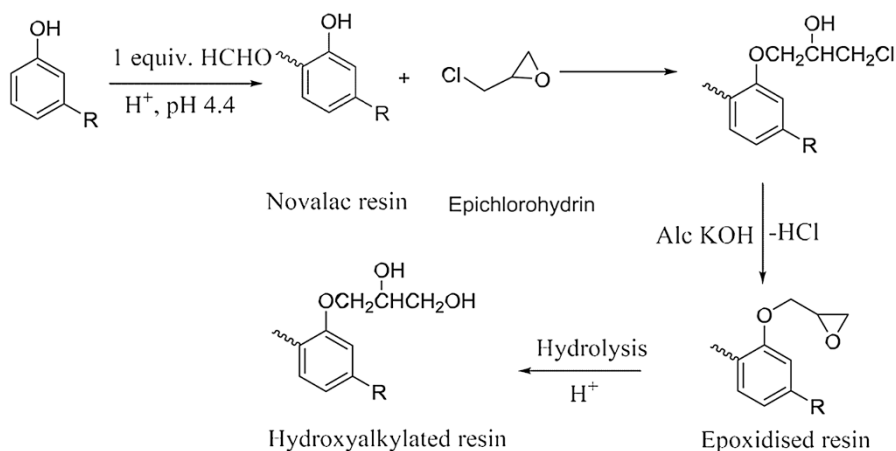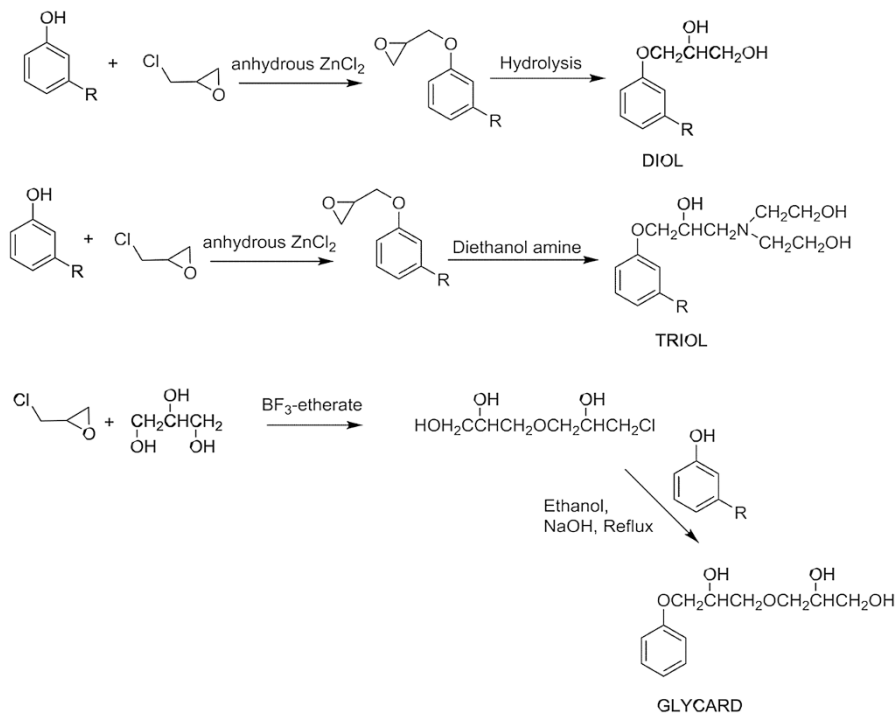**Scheme 8** Formation of the hydroxyalkylated resin using cardanol [43]**Scheme 9** Various routes to synthesis of polyols from cardanol [35]

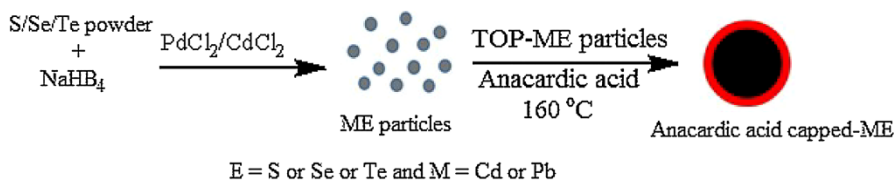

Scheme 10 Reaction scheme for the synthesis of anacardic acid capped ME nanoparticles [44]

reported the use of cashew nut shell liquid extracts for the synthesis of metal chalcogenides (cadmium and lead sulfide, selenide and telluride) nanoparticles via a solution-based technique. The synthesized metal chalcogenide nanoparticles had well-defined size and morphology comparable to those obtained using other capping agents under similar reaction conditions. The suitability of cashew nut shell liquid and its isolate, anacardic acid, in nanoparticle synthesis is associated with their chemical structures, easy availability, nontoxicity, low cost, non-food competition, high boiling point and high viscosity. Other naturally occurring green chemicals that have been used as capping agents to fabricate nanoparticles are castor oil/ricinoleic acid [46], olive oil [47, 48], and oleic acid. [49].

14 Activated Carbon and Biomass Briquettes

The cashew nut shells remaining after removal of cashew nut shell liquid have the potential to be used in the production of activated carbon and biomass briquettes.

Activated carbon is a form of carbon processed to have small, low-volume pores that increase the surface area available for adsorption or chemical reactions. Historically, activated carbon has been mainly used for removal of unwanted color pigments, removal of odor and for various catalytic functions. However, with the advancement of activated carbon process capability, activated carbon has found more applications in industrial, pharmaceutical, chemical and environmental; for adsorption of unwanted chemicals, to neutralize toxic compounds, food purification, soil enrichment and carrier of chemical catalysts.

Biomass briquette is small block of compressed coal dust or other combustible biomass material such as charcoal, rice husk, bagasse, ground nut shells, municipal solid waste, sawdust, wood chips, peat, or paper used for fuel especially in the developing world, where cooking fuels are not as easily available. The raw materials are compressed into briquette in order to burn longer and make transportation of the goods easier. Cashew nut shells are known to have high energy content which qualifies them as potential raw materials for making biomass briquette.

15 Conclusions

The diversity of chemical transformation techniques available for converting CNSL into useful industrial chemicals has proven that cashew nut shells are

important and potential resource. The presence of double bonds and a phenol functionality in the components of cashew nut shell liquid offer unique properties for the derivatization of CNSL components into vital industrial raw materials or finished products. This paper has briefly shown how cashew nut shells can be valorized into CNSL, which in turn can be used as a renewable bio-based resource for the production of several chemicals such as tsetse fly attractants, bifunctional monomers and polymers, 1-octene, 3-nonylphenol and detergents. This diversity of chemicals from CNSL components signifies that CNSL is a potential alternative to petroleum-based starting materials for the production of wide range of industrial materials. The fact that cashew nut shells are obtained as wastes from cashew nut processing factories means they do not compete with food production, hence they are a cheap and environmentally friendly resource of chemicals.

References

1. Rabany C, Rullier N, Ricau P (2015) The African cashew sector in 2015. General trends and country profiles. <https://www.rongead.org> p 1–37, Accessed on 21 Oct 2016
2. Cashewinfo.com (2014) Cashew handbook 2014-global perspective, 4th edn. Foretell Business Solutions Private Limited, Bengaluru, pp 13–139
3. Kumar PP, Paramashivappa R, Vithayathil PJ, Rao PVS, Rao AS (2002) Process for isolation of cardanol from technical cashew (*Anacardium occidentale* L) nut shell liquid. J Agric Food Chem 50:4705–4708
4. Tyman JHP, Johnson RA, Muir M, Rokhagar R (1989) The extraction of natural cashew nut-shell liquid from the cashew nut (*Anacardium occidentale*). JAOCS 66:553–557
5. Kumar PS, Kumar NR, Sivakumar R, Kaushik (2009) Experimentation on solvent extraction of polyphenols from natural waste. J Mater Sci 44:5894–5899
6. Idah PA, Simeon MI, Mohammed MA (2014) Extraction and characterization of cashew nut (*Anacardium occidentale*) oil and cashew shell liquid oil. Acad Res Int 5(3):50–54
7. Yuliana M, Tranthi NY, Ju Y (2012) Effect of extraction methods on characteristic and composition of Indonesian cashew nut shell liquid. Ind Crop Prod 35:230–236
8. Patel RN, Bandyopadhyay S, Ganesh A (2006) Extraction of cashew (*Anacardium occidentale*) nut shell liquid using supercritical carbon dioxide. Bioresour Technol 97:847–853
9. Smith RL Jr, Malaluan RM, Setianto WB, Inomata H, Arai K (2003) Separation of cashew (*Anacardium occidentale* L.) nut shell liquid with supercritical carbon dioxide. Biores Technol 88:1–7
10. Gandhi TS, Dholakiya BZ, Patel MR (2013) Extraction protocol for isolation of CNSL by using protic and aprotic solvents from cashew nut and study of their physico-chemical parameter. Pol J Chem Tech 15(4):24–27
11. Garkal DJ, Bhande RS (2014) Review on Extraction and Isolation of Cashew Nut Shell Liquid. IJI-ERT. 1(1):1–8
12. Sivakumar S, Venkatachalam R, Nedunchezian N, Sivakumar P, Rajendran P (2014) Processing of cashew nut shell and feasibility of its oil as bio fuel in compression ignition engine. JCHPS (Special Issue) 4:133–135
13. Rodrigues FHA, Franca FCF, Souza JRR, Ricardo NMPS, Feitosa JPA (2011) Comparison between physico-chemical properties of the technical cashew nut shell liquid (CNSL) and those natural extracted from solvent and pressing. Polímeros 21:156–160
14. Himabindu T, Raguram V, Kum ST (2015) Review on various methods of extraction of cashew nut shell liquid and isolation of anacardic acid. Int J Inst Pharm Life Sci 5:293–308
15. Julis J, Bartlett SA, Baader S, Beresford N, Routledge EJ, Cazin CSJ, Cole- Hamilton DJ (2014) Selective ethenolysis and oestrogenicity of compounds from cashew nut shell liquid. Green Chem 16:2846–2856

16. Shinde T, Varga V, Pola M, Hora M, Balcar H (2014) Metathesis of cardanol over Ru catalysts supported on mesoporous molecular sieve SBA-15. *Appl Catal A* 478:138–145
17. Mgaya JE, Bartlett SA, Mubofu EB, Mgani QA, Slawin AMZ, Pogorzelec PJ, Cole-Hamilton DJ (2016) Synthesis of bifunctional monomers by the palladium-catalyzed carbonylation of cardanol and its derivatives. *ChemCatChem* 8:751–757
18. Mgaya JE, Mubofu EB, Mgani QA, Cordes DB, Slawin AM, Cole-Hamilton DJ (2015) Isomerization of anacardic acid: A possible route to the synthesis of an unsaturated benzolactone and a kairomone. *Eur J Lipid Sci Technol* 117:190–199
19. Graham MB, Tyman JHP (2002) Ozonization of phenols from *Anacardium occidentale* (cashew). *JAOCs* 79:725–732
20. Besteti MD, Souza FG Jr, Freire DMG (2014) Production of core-shell polymer particles-containing cardanol by semibatch combined suspension/emulsion polymerization. *Polym Eng Sci* 54:1222–1229
21. Kanehashi S, Yokoyama K, Masuda S, Kidesaki T, Nagai K, Miyakoshi T (2013) Preparation and characterization of cardanol-based epoxy resin for coating at room temperature curing. *J Appl Polym Sci*. <https://doi.org/10.1002/APP.39382>
22. Shukla P, Srivastava D (2014) Reaction kinetics of esterification of phenol-cardanol based epoxidized novolac resins and methacrylic acid. *Int J Plast Technol* 18:1–15
23. Misra AK, Pandey GN (1985) Kinetics of alkaline-catalyzed cardanol-formaldehyde reaction. 11. mechanism of the reaction. *J Appl Polym Sci* 30:969–977
24. Chikkali S, Mecking S (2012) Refining of plant oils to chemicals by olefin metathesis. *Angew Chem Int Ed* 51:5802–5808
25. Espinos LMD, Meier MAR (2011) Plant oils: the perfect renewable resource for polymer science? *Eur Polym J* 47:837–852
26. Mmongoyo JA, Mgani QA, Mdachi SJM, Pogorzelec PJ (2013) Synthesis of a kairomone and other chemicals from cardanol, a renewable resource. *Eur J Lipid Sci Technol* 114:1183–1192
27. Baader S, Podsiadly PE, Hamilton DJCH, Goossen LJ (2014) Synthesis of tsetse fly attractants from a cashew nut shell extract by isomerising metathesis. *Green Chem* 16:4885–4890
28. Furst MRL, Goff RL, Quinzler D, Mecking S, Botting CH, Cole-Hamilton DJ (2012) Polymer precursors from catalytic reactions of natural oils. *Green Chem* 5:472–477
29. Quinzler D, Mecking S (2010) Linear semicrystalline polyesters from fatty acids by complete feed-stock molecule utilization. *Angew Chem* 122:4402–4404
30. Rodriguez CJ, Foster DF, Eastham R, Cole-hamilton DJ (2004) Highly selective formation of linear esters from terminal and internal alkenes catalysed by palladium complexes of bis-(di-tert-butyl-phosphinomethyl)benzene. *Chem Commun* 15:1720–1721
31. Rodriguez CJ, Eastham GR, Cole-Hamilton DJ (2005) Dicarboxylic acid esters from the carbonylation of unsaturated esters under mild conditions. *Inorg Chem Commun* 8:878–881
32. Neuse EW (1973) Polymers for potential use as charring ablators under hyperthermal re-entry conditions: a review of recent developments. *Mater Sci Eng* 11:121–150
33. Morgan AB, Gilman JW (2013) An overview of flame retardancy of polymeric materials: application, technology, and future directions. *Fire Mater* 37:259–279
34. Kashiwagi T, Gilman JW, Nyden MR (1997) Polymer combustion and new flame retardants. *Eur Meet Fire Retard Polym Mat* 224:176–202
35. Suresh KI, Kishanprasad VS (2005) Synthesis, structure, and properties of novel polyols from cardanol and developed polyurethanes. *Ind Eng Chem Res* 44:4504–4512
36. Bhunia HP, Basak A, Chaki TK, Nando GB (2000) Synthesis and characterization of polymers from cashewnut shell liquid: a renewable resource V. *Synth Copolyest* 36:1157–1165
37. Voirin C, Caillol S, Sadavarte NV, Tawade BV, Boutevin B, Wadgaonkar PP (2014) Polymer Chemistry Functionalization of cardanol: towards biobased polymers and additives. *Polym Chem* 5:3142–3162
38. Jaillet F, Darroman E, Boutevin B, Caillol S (2016) A chemical platform approach on cardanol oil: from the synthesis of building blocks to polymer synthesis. *OCL* 23(5):1–7
39. Chuayjuljit S, Rattanametangkool P, Potiyaraj P (2006) Preparation of cardanol-formaldehyde resins from cashew nut shell liquid for the reinforcement of natural rubber. *J Appl Polym Sci* 104:1997–2002
40. Manjula S, Pillai KKS, Kumar VG (1990) Thermal characterization of cardanol-formaldehyde resins and cardanol-formaldehyde/poly(methyl methacrylate) semi-interpenetrating polymer networks. *Thermochim Acta* 159:255–266

41. Cardona F, Moscou C (2009) Synthesis and characterization of modified phenolic resins for composites with enhanced mechanical properties. In: 20th Australasian Conference on the Mechanics of Structures and Materials (ACMSM20): Futures in Mechanics of Structures and Materials, Toowoomba, Australia, p1–6
42. Yadav R, Srivastava D (2008) Studies on cardanol-based epoxidized novolac resin. *Chem Chem Technol* 2(3):1–12
43. Gopalakrishnan S, Fernando TL (2011) Bio-based thermosetting tough polyurethanes. *Der Chem Sin* 2:54–64
44. Mlowe S, Pullabhotla RR, Mubofu EB, Ngassapa F, Revaprasadu N (2014) Low temperature synthesis of anacardic-acid-capped cadmium chalcogenide nanoparticles. *Int Nano Lett* 4(10):1–6
45. Mubofu EB, Mlowe S, Revaprasadu N (2016) Cashew nut shells as source of chemicals for preparation of chalcogenide nanoparticles. *Nanosystems* 7(4):724–727
46. Kyobe JW, Mubofu EB, Makame YMM (2015) CdSe quantum dots capped with naturally occurring biobased oils. *New J Chem* 39:1–9. <https://doi.org/10.1039/C5NJ01460C>
47. Nyamen LD, Revaprasadu N, Ndifon PT (2014) Low temperature synthesis of PbS and CdS nanoparticles in olive oil. *Mater Sci Semicond Process* 27:191–196
48. Sapra S, Rogach AL, Feldmann J (2006) Phosphine-free synthesis of monodisperse CdSe nanocrystals in olive oil. *J Mater Chem* 16:3391–3395
49. Chen J, Song JL, Sun XW, Deng WQ, Jiang CY, Lei W, Huang JH, Liu RS (2009) An oleic acid-capped CdSe quantum-dot sensitized solar cell. *Appl Phys Lett* 94:153115



Valorisation of Biowastes for the Production of Green Materials Using Chemical Methods

Thomas I. J. Dugmore¹ · James H. Clark¹ ·
Julen Bustamante¹ · Joseph A. Houghton¹ ·
Avtar S. Matharu¹

Received: 9 September 2016 / Accepted: 20 March 2017 / Published online: 3 April 2017
© The Author(s) 2017. This article is an open access publication

Abstract With crude oil reserves dwindling, the hunt for a sustainable alternative feedstock for fuels and materials for our society continues to expand. The biorefinery concept has enjoyed both a surge in popularity and also vocal opposition to the idea of diverting food-grade land and crops for this purpose. The idea of using the inevitable wastes arising from biomass processing, particularly farming and food production, is, therefore, gaining more attention as the feedstock for the biorefinery. For the three main components of biomass—carbohydrates, lipids, and proteins—there are long-established processes for using some of these by-products. However, the recent advances in chemical technologies are expanding both the feedstocks available for processing and the products that be obtained. Herein, this review presents some of the more recent developments in processing these molecules for green materials, as well as case studies that bring these technologies and materials together into final products for applied usage.

Keywords Green chemistry · Biomass · Waste valorisation · Microwave

1 Introduction

1.1 Global Drivers

Sustainability is a much-used modern day buzzword that encompasses economic, social, and environmental values, i.e. the three pillars of sustainability. Sustainable

Chapter 4 was originally published as Dugmore, T. I. J., Clark, J. H., Bustamante, J., Houghton, J. A. & Matharu, A. S. Top Curr Chem (Z) (2017) 375: 46. DOI 10.1007/s41061-017-0133-8.

✉ Thomas I. J. Dugmore
tom.dugmore@york.ac.uk

¹ Green Chemistry Centre of Excellence, University of York, York, North Yorkshire YO10 5DD, UK

development is development that meets the needs of the present without compromising the ability of future generations to meet their own needs [1]. However, the last one hundred years has seen global population multiply fourfold to 7.4 billion, global economic output increase more than 20-fold, and global material consumption increase eightfold. To date, about 72 billion metric tonnes (Gt) of materials are being consumed by humanity per annum and this number is projected to reach 100 Gt by 2030 [2].

Because of its abundance, ease of extraction and versatility, crude oil has been the primary feedstock for fuels and materials in modern day society for over a century [3]. Liquid fuels for the automotive industry is the most prolific use of crude oil; in the USA, fuels account for 76% of consumption as of 2014 [4]. However, many other materials are also derived from crude oil, most notably plastics (accounting for 6% of total oil consumption [5]), but pharmaceuticals, lubricants, adhesives, cosmetics, and food additives (and many others) are all typically manufactured from crude oil [6]. The manufacture of many of these products also requires the use of solvents, which are also largely crude-oil derived and account for ~1% of consumption [5, 7]. The outputs of chemical manufacturing are a success story reflected by the vast number articles and goods used in modern-day society that cater for daily well-being and lifestyle.

However, whilst crude oil may be the cornerstone of our established chemical industries it is a finite resource and its continued use represents a major environmental burden. Crude oil typically takes millions of years to form from biomass and migrate to reserves that are easy to tap [8–11], however as of 2013, our consumption is roughly 90,000 barrels per day (14.3 billion litres) [12]. Current estimates of remaining known reserves is between 900 and 1350 billion barrels [13]; although it should be noted that reporting figures do not always distinguish between proven reserves and probable reserves [14] and independent consensus from several reports has advised revising these figures downwards [15–18]. Crude oil consumption exceeded discovery in the late 1970s and on current consumption rates, crude oil is projected to run out approximately between 2080 and 2100 [13, 19]. Additionally, there are rising concerns about the environmental impact of extracting, refining, and using crude oil. Greenhouse gas (GHG) emissions are amongst the primary concerns; if we are to limit global warming to no more than 2 °C by 2020, then over 80% of coal, 50% of gas, and 30% of oil reserves are un-burnable [20]. Additionally the safety of the extraction/refining processes themselves are also of concern due to the environmental impact of oil spills [21]. Furthermore, increasing legislation, in particular REACH (Registration, Evaluation, Authorisation, and Restriction of Chemicals) in the European Union and its counterparts in other parts of world will certain raw materials' availability, supply chains, and businesses [22].

In order to maintain worldwide quality of life and development levels, it is, therefore, imperative to access a clean, sustainable feedstock for our chemicals, materials, and energy. This led to the development of the biorefinery concept, whereby biomass, as opposed to crude oil, is the refinery feedstock and subsequently processed to separate the material into different fractions (such as biogas, sugars, proteins, oils, and cellulosic residues) before further processing into useful, marketable products and energy [23–27].

Whilst this concept enjoyed an initial surge in popularity in the mid-2000s, a number of problems soon arose—most notably in the use of biofuels. As fuel accounts for the largest consumption of crude oil, it is perhaps inevitable that biofuels were one of the first and fastest-developing bio-products to emerge [28–30]. The two most prominent biofuel processes at the time were fermentation to produce bio-ethanol to replace petroleum [25] and transesterification of vegetable oils with methanol to produce fatty acid methyl ester (FAME) biodiesel to replace mineral diesel [25, 28, 30–33].

The biggest problem that arose was the objection to using food-grade crops to produce fuels with malnutrition still being a global issue in what become popularly known as the “food vs. fuel debate” [34]. However, with biodiesel in particular, a number of operational problems with the fuels themselves started to become apparent. Vehicles, in particular, equipped with diesel particulate filters observed reduced engine performance over time due to injector clogging [35–37] and lubricant fouling [37–41] amongst others. This became largely attributed to polyunsaturated fats polymerising at higher temperatures and forming reactive oxygen radicals at moderate temperatures which in turn attacked the engine lubricant [40, 42]. Meanwhile, saturated fats, due to their higher melting points, solidify at temperatures unsuitable to the majority of European and North American environments, particularly during winter [43, 44].

Meanwhile, our current global society is suffering from escalating waste problems, which is becoming increasingly important and alarming in less developed and developing countries such as the BRICS (Brazil, Russia, India, China, and South Africa) and MINT (Mexico, Indonesia, Nigeria, and Turkey) nations, as well as in developed countries. The UN’s new sustainable development agenda sets key targets to reduce waste and also to protect natural resources, which are to be achieved by 2030 [45]:

- To manage and use natural resources sustainably and efficiently;
- To halve per capita global food waste at the retail and consumer levels and reduce food losses along production and supply chains, including post-harvest losses;
- To reduce waste generation substantially through prevention, reduction, recycling, and reuse;
- To ensure that people everywhere have the relevant information and awareness for sustainable development and lifestyles in harmony with nature;
- To support developing countries to strengthen their scientific and technological capacity to move towards more sustainable patterns of consumption and production.

To be truly sustainable, a more holistic approach to the biorefinery concept is required. As well as being renewable, an ideal feedstock also needs to be available on the timescales and volumes required for production. The means of processing it to a product should also be environmentally benign where possible, whilst ensuring that the product is still fit for purpose. The end of life of the product, as well as any waste generated during the process also requires attention. The now-famous 12

Principles of Green Chemistry developed by Anastas and Warner [46] in 1998 provided a good set of guidelines of how to produce chemical products and materials in an environmentally benign fashion. However, legislation is also coming in fast in other areas related to supply of feedstocks and handling of waste—most notably REACH (in the case of chemical feedstock for the former [22]) and the Waste Framework Directive (for the latter [47]) in Europe.

1.2 Unavoidable Agri-Supply and Food-Supply Chain Wastes: An Interesting Renewable Resource

The twin problems faced by modern society of unsustainable dependence on non-renewable fossil resources (escalating demand with respect to supply) and escalating waste problems has the potential to be addressed by employing certain unavoidable wastes as raw materials. Unavoidable wastes such as agri- and food-supply chain wastes that arise from primary and secondary processing contain a wide range of highly functional molecules and are therefore prime candidates to be valuable raw materials for biorefineries for the generation of high-value products.¹ Processes using renewable feedstocks are often closer to being carbon neutral compared with those of the conventional petrochemical routes [48, 49].

Even assuming that 100% of arable land is used for food production, the same efficiency is not the case for the crops themselves. Across the entire food and farming industries there are losses from harvest, through processing, all the way to retail, catering, and home consumption. This is in no small part due to inefficiency (spills, storage, etc.), but also nearly every crop has parts that are inedible to humans and therefore subsequently consigned to waste. For filter coffee production for instance, the pulp, and hull of the coffee beans are removed at harvest, during the roasting process the silverskins (or chaff) fall off, and finally, at the point of consumption boiling water is passed over the ground coffee to extract the flavour, leaving the grounds themselves behind as residues [50–52]. Whilst inedible to humans (and in the case of spent coffee grounds, to animals, notably ruminants [53] as well due to the presence of theobromine [50]), many of these residues still contain many functional materials and chemicals. For instance, relating to the food vs. fuel concept, spent coffee grounds also contain good amounts of oil (10–15% [50, 51])—Table 1 compares the oil yield of spent coffee grounds (SCG) to other typical oilseed crops. Several studies have successfully converted this oil to biodiesel which complies with both EN and ASTM standards [54–58] and London, UK, has now seen its first commercial SCG biodiesel plant open in 2014 [59].

However, even after the oil has been extracted, this still leaves the remaining residues behind, which account for >80% of the overall mass. SCGs have also been researched as solid fuels [56, 72, 73], but higher value applications for the solid portion to be researched have included: adsorbents for metal ions [74], capture of dyes [75, 76], and CO₂ [77], extraction of antioxidants [78–83], as a growth medium for edible mushrooms [84] and fungal strains to release phenolic compounds [85].

¹ High value in this context means additional to economic value created from liquid biofuels (bioenergy) within the context of a biorefinery.

Table 1 Typical oil content of various oilseed crops (wet basis)

Oilseed crop	Typical oil yield (%)
Spent coffee grounds	10–15
Chia	32–38 [60]
Corn	5–15 [61, 62]
Linseed	34–43 [63]
Olive	5–25 [64]
Rapeseed (Canola)	35–50 [65–67]
Soybean	10–20 [68, 69]
Sunflower	25–45 [70, 71]

Whilst, due to their high volumes, agri-residues have attracted a large amount of research interest, it is important to note that they are not the only source of biowastes. Forestry, for instance, also generates large amounts of wastes from tree felling in the form of smaller branches, leaves, needles, etc., which are removed before the larger tree logs are used for wood and paper [86]. Municipal maintenance and gardening also generate waste biomass in the form of pruning, grass cuttings, and hedge trimmings—generally considered (alongside household waste) as municipal solid waste (MSW) (sometimes termed organic fraction municipal solid waste, OFMSW) [87, 88]. Whilst composition varies, biomass still comprises largely the same types of major molecules (proteins, carbohydrates, and lipids) with lesser amounts of speciality molecules.

Both established and emerging global economies view waste as a bioresource for our next generation energy, chemicals, or platform molecules and materials, lessening the burden on crude oil, as of strategic importance. (Bio)waste as a resource has been recognised of national importance by the UK government following their 2015 report, “Building a high value bioeconomy: opportunities from waste” [89] as a result of the House of Lords Science and Technology Committee report, “Waste or resource? Stimulating a bioeconomy” [90] published a year earlier, both evoking the need for a UK bioeconomy for future sustainable development. The reports highlight a significant market for renewable chemicals, already estimated to be \$57 billion worldwide and forecast to rise to \$83 billion by 2018. Similarly, the United States Department of Agriculture (USDA) BioPreferred program reports that a bio-based economy contributes a total of \$369 billion to the U.S. economy each year, while four million jobs were supported, directly and indirectly, by the bio-based economy [91]. Small and medium enterprises (SMEs) are an important driver for new growth as the EU bioeconomy (not restricted to waste feedstocks) has a turnover of about €2 trillion, employs around 22 million people, mainly in rural areas and often SMEs, and represents 9% of total employment in the EU. Each euro invested in EU-funded bioeconomy research and innovation is estimated to enable €10 of value added in bioeconomy sectors by 2025 [92].

Biorefineries will emerge alongside new infrastructure technologies. Some biorefineries will be standalone, others integrated with traditional petro-refineries, for maximum resource re-use. The best biorefineries will be those that are feedstock

flexible, thus functioning all year round. New process intensification methodologies will need to be developed in order to maximise resource and reduce waste as chemical manufacturing “does more and better with less”. Unavoidable food supply chain waste (UFSCW) represents an interesting “waste as a resource” option due to its high volume, chemical richness, and heterogeneity.

1.3 High Value Applications

Whilst food vs. fuel dominated the early biofuels debate, it is important to note that the biorefinery concept extends far beyond fuels, both in terms of products to be produced, as well as use of the entire feedstock. Examples of research beyond fuels into the solid portion of spent coffee grounds have already been given, but it is important to note that in the context of the biorefinery, for example, production of adsorbents for metal ions should be in addition to oil extraction. As with the petroleum industry, the feedstock should be processed to produce a range of products rather than honed in on one single product. As crude oil is the core feedstock for a range of materials besides just fuels, it is important that in order to succeed the oil refinery, the biorefinery should achieve the same goals. In fact, fuels from biomass should arguably be a last resort for two reasons.

The first is the concern about GHG emissions. Whilst biomass is renewable, as it is carbonaceous, burning it for energy still emits CO_2 as part of the combustion process. As plants continually take in CO_2 to produce energy and materials, the carbon emissions offset far more than for fossil fuels and are sometimes viewed as “theoretically” carbon neutral. However, once the full life cycle is taken into account beyond simply the carbon of the plant to include farming equipment, pesticides, conversion to fuel, etc., burning of biofuels still contributes a net increase in carbon emissions and can even be higher if, for instance, forests are cleared to grow biofuel crops [93–95].

The second is about efficient use of feedstocks. There exist a number of alternative ways to generate renewable energy such as solar, wind and hydroelectric. However, these sources cannot directly generate the carbon building blocks necessary to build the materials and products needed by society. As synthetic chemistry (whether for a single, pure product, polymer, or composite) essentially involves taking smaller, simple molecules and assembling them into larger, more complex ones, it is seen as wasteful to take biomass, which is already full of large, complex molecules and then burn it to reduce it back down to CO_2 —one of the simplest carbon-containing molecules. We should look to use the inherent structure and functionality provided by nature’s biopolymers and chemicals of life rather than trying re-synthesis from petroleum-based building blocks. Hence, making innovative use of currently low-value, underutilised biorenewable waste streams, especially unavoidable losses resulting from industrial practices (e.g. manufacturing, recycling) for the production of bio-derived chemicals, fuels, and other value-added functional materials is particularly important and attractive. Such waste valorisation practices also represent an imperative grand research challenge and a promising topic globally from both an environmental and economic point of view.

Herein, this review explores the major components of unavoidable terrestrial waste biomass, namely agri- and food waste. The first part will describe some of the advances in chemical technologies that allow processing of these components into higher value application materials. Secondly, some case studies where several aspects of these technologies are being brought together to help realise a “true” biorefinery where no part of the feedstock is lost to waste will be covered. Since polymers are the second largest product market after fuel, a significant amount of the materials and applications covered will fall into this category. This is to be a generic overview of some of the main processing means developed in the last few years and not intended to be exhaustive.

2 Carbohydrates

Of the three main biomass building blocks, carbohydrates are the most hydrophilic; as they are essentially hydrates of carbon, carbohydrates possess a hydroxyl group on every carbon atom to provide a high degree of polarity and hydrogen bonding. In biomass, carbohydrates mainly fall into two categories—simple sugars (monosaccharides) and dimers or polymers of those sugars (polysaccharides) with the remainder being derivatives of these. Of the simple sugars, the most abundant is glucose, which exists in two forms, α - and β -glucose, (structures shown in Fig. 1) with the only difference being the hydroxyl group at the 1' position being either axial or equatorial. As glucose possesses six carbon atoms, it is classed as a hexose; the remaining hexose sugars are all analogous to glucose, again differentiated by the hydroxyl groups at the other positions being axial or equatorial. Other than hexose sugars, there are also pentose sugars which consist of five membered rings rather than six membered rings, again with the position of the hydroxyl groups determining the isomers [96].

2.1 Sugars

Since the simple sugars are so similar in structure, processing them using many “broad-brush” techniques is relatively easy. As sugars are also a primary energy source for many non-photosynthetic cells, fermentation to ethanol (for fuel or alcoholic beverages) has long been a means of converting sugars to other products [97–99]. As the process of fermentation involves the production of several intermediates [100], as do many other metabolic processes, many recent advances in sugar valorisation utilised fermentation to other target molecules, particularly platform molecules—those identified as being a set of basic chemical building blocks for synthesis into a wider range of molecules. Notable ones include lactic acid [101, 102], succinic acid, and levulinic acid [103]—structures shown in Fig. 2—although more will be covered throughout this review.

Lactic acid production via fermentation is an extremely well-known process, which was reported by Luedeking and Piret as early as 1959 using glucose as a feedstock and *Lactobacillus* bacteria [104]. Since then, through a combination of selective breeding of bacteria and enhancements of work-up and isolation

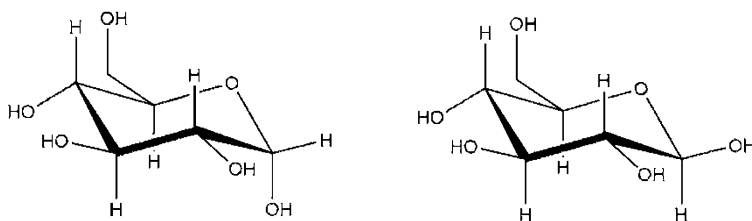


Fig. 1 α - and β -glucose, the most abundant sugars

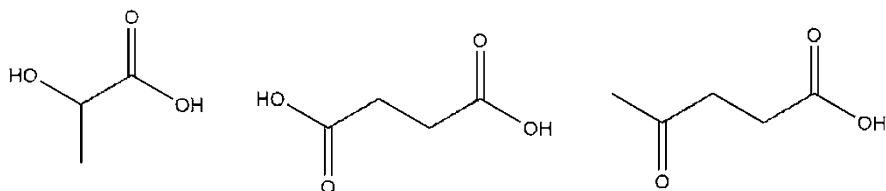


Fig. 2 From *left to right*: lactic acid, succinic acid, levulinic acid

techniques, the process has advanced considerably; a particular high point coming in 1996 with Linko and Javanainen reporting a yield of 98% from glucose using *Lactobacillus*—although several purification steps were still required to isolate the lactic acid from the broth [105]. As it possesses both an acid and alcohol moiety, lactic acid polymerises into polylactic acid (PLA) with relative ease. Polylactic acid is a well-established bio-based polymer, which is favoured for its biodegradability and compostability. It can, therefore, be used in many packaging and coating applications where biodegradability is desired, but is unsuitable for others—notably food packaging—due to its permeability and biocompatibility [106].

Succinic acid and levulinic acid are relatively more recent developments in the field (though receiving an increasing amount of attention). Originally, production of succinic acid (traditionally known as “spirit of amber”) was via the distillation of amber; it is also petrochemically produced from butane. It was identified by Zeikus in 1999 [107] for its potential to be produced from fermentation, albeit with low yields of around 45 g/L unless using specific bacteria from the *Succinogenes* species. It was identified in 2004 by the USDA as “one of the renewable building block chemicals with the greatest technical feasibility and commercial potential” [108], and the last few years has seen a surge in publications on its production. Levulinic acid was also mentioned as one of the 12 key platform molecules in the same report—it is traditionally produced from heating sugars in the presence of dilute acid [109]. Levulinic acid, therefore, has the longest history of bio-derivation, the key green chemistry driver for a switch to enzymatic production, in this instance to remove the mineral acid waste stream left over; to this end acidic ionic liquids have also been investigated [110].

Succinic acid is a popular choice as a platform molecule as just a few chemical steps allows conversion into a range of different molecules; Fig. 3 provides a (non-exhaustive selection). These include:

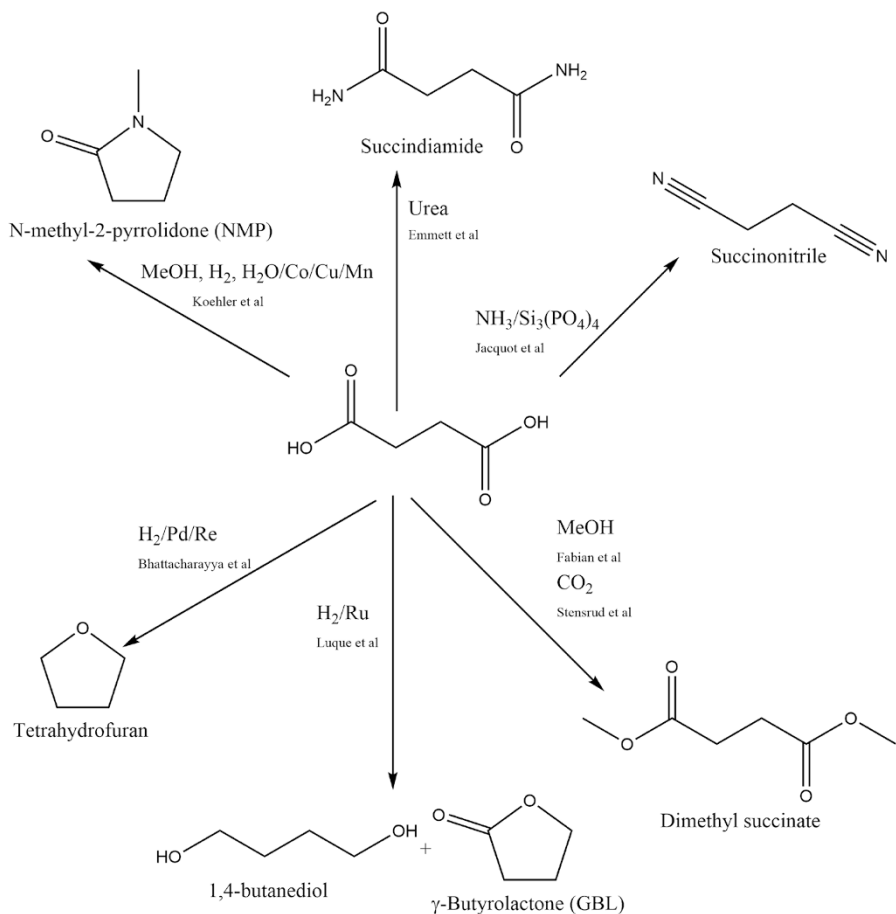


Fig. 3 The chemical structure of succinic acid and a selection of conversions that can be performed on it [112–121]

- Common manufacturing solvents, such as tetrahydrofuran and *N*-methyl pyrrolidone (NMP), although the latter is becoming strongly discouraged through REACH);
- Succinonitrile, a widely used electrolyte for Li-ion batteries (commonly produced by reacting toxic hydrogen cyanide with acrylonitrile [111]);
- Monomers for plastic production, such as 1,4-butanediol and succindiamide—although it is a di-acid, succinic acid itself is a monomer for polymer production.

As a di-acid, polyesters are one of the most prominent polymer classes to which SA can be a monomer. In addition to SA, there are many other di-acids that can be produced through fermentation including malic acid, maleic acid, and itaconic acid (structures shown in Fig. 4)—all of which can be converted to the subsequent diols.

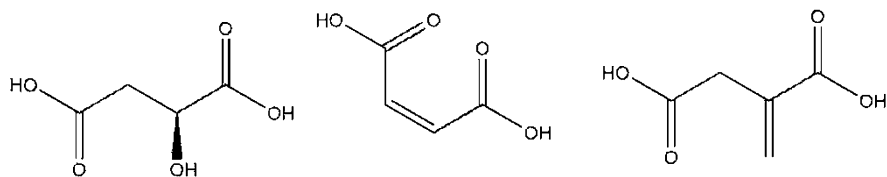


Fig. 4 From left to right: malic acid, maleic acid, and itaconic acid

Many of these molecules can be and are produced from petrochemical feedstocks (e.g. SA is produced by oxidation of butanediol, which is in turn produced by reacting ethyne with formaldehyde); therefore, in addition to bio-derivation, one of the advantages of using these platform molecules is that it avoids the use of toxic or otherwise harmful oxidation agents. Polyesters from combinations of these platform molecules have been successfully achieved in a number of studies using standard poly-esterification methods, such as with Ti(IV) tetra-*tert*-butoxide as a catalytic initiator [122] and through Michael additions using 1,3-dicarbonyls to produce a more complex branched network [123]. The resulting resins have had a range of properties reported, e.g. polydispersities from 2.8 to 85, molecular weight distribution from 8300 to 350,000 Da and glass transition temperatures from -51.2 to 135.4 °C—all of which further increased with Michael additions. Whilst the range of properties is promising, the authors did note two unwanted side reactions—*isomerisation* of itaconate units and *saturation* of C=C bonds—highlighting a need for good control measures in scale-up.

Whilst not typically produced chemically, polyhydroxyalkanoates (PHAs) are another class of linear polyesters worthy of mention—ones where the alcohol and acid moiety are on the same molecule. Many bacteria produce them as a means of carbon/energy storage from sugars and lipids. As previously noted, there are a wide range of different monomers, which can be produced from sugar fermentation there is similarly a wide range of polymers and resulting properties, which can be produced [124]. One of the most common is poly-*(R)*-3-hydroxybutyrate (P3HB), which typically employs glycerol as a feedstock; therefore, the lipids section will cover this in more detail.

One issue with the use of sugars for production of platform molecules is obtaining them from the respective biowastes. Solubilisation and extraction methodologies to extract sugars from complex matrices, such as pressing, ultra-filtration, and hot acid extraction have all been trialled [125, 126], but increasingly, free sugars in mixtures have also been studied for direct fermentation. Table 2 presents a range of substrates, bacteria, and yields of succinic acid and lactic acid reported from various studies. The results show many high ($>70\%$) yields, indicating the potential for such a biorefinery concept to be adaptable to many different types of biowastes. It is worth noting that whilst lactic acid yields are notably generally superior to those from succinic acid, this is partly attributed to the fact that lactic acid fermentation is a much more established technology than succinic acid fermentation; however, using mixed waste feedstocks is still a comparatively recent development in the field. This suggests that as technology

Table 2 A summary of some of the lactic acid and succinic acid yields from various food waste feedstocks

Feedstock	Bacteria	Yield (g/g)	Authors
Lactic acid			
Jackfruit seeds	<i>Streptococcus equinus</i>	0.62	Nair et al. [127]
Corn stover	<i>Lactobacillus pentosus</i> FL0421	0.66	Hu et al. [128]
Hydrolysed bakery waste	<i>Thermoanaerobacterium aotearoense</i> LA1002-G40	0.89	Yang et al. [129]
Sweet sorghum juice	<i>Bacillus coagulans</i>	0.92	Wang et al. [130]
Bakery waste	<i>Lactobacillus casei</i>	0.94	Kwan et al. [131]
Mixed food waste	<i>Lactobacillus casei</i>	0.94	Kwan et al. [131]
Succinic acid			
Cake	<i>Actinobacillus succinogenes</i>	0.25	Zhang et al. [132]
Pastry	<i>Actinobacillus succinogenes</i>	0.32	Zhang et al. [132]
Bread	<i>Actinobacillus succinogenes</i>	0.47	Zhang et al. [132]
Cane molasses	<i>Actinobacillus succinogenes</i>	0.55	Liu et al. [133]
Wood hydrolysate	<i>Mannheimia succiniciproducens</i> MBEL55E	0.56	Kim et al. [134]
Corn stalk	<i>Actinobacillus succinogenes</i>	0.66	Li et al. [135]
Cotton stalk	<i>Actinobacillus succinogenes</i>	1.23	Li et al. [135]

increases, or more efficient bacterial strains evolve, there is still very good scope for yields of succinic acid to increase over the next few years.


2.2 Starch

In addition to simple sugars, carbohydrates consist of a wide range of more complex polysaccharide molecules, with starch and cellulose the two most common. The main component of starch is simply long, linear chains of α -glucose polymerised through the 1 and 4 carbons—see Fig. 5.

There are several noted starch-rich food wastes. For instance, roughly 19% of the weight of a potato is starch [136]. Current global production of potatoes reached 360 million tonnes in 2013, with the UK alone producing 5.5 million tonnes [137].

Starch has been used for decades as a thickening agent, primarily for cooking, but also to produce gels for adhesion purposes. Most modern starch-based adhesives require some means of chemical modification (typically acid- or alkali- based) prior to their use, but have still generally been restricted by water-stability or inadequate mechanical properties for advanced applications. A more recent development by White et al. investigated the use of controlled thermolysis to achieve modification [138]. They used corn starch in water and heated above 100 °C under pressure (both thermal and microwave heating methods were used) to maintain water in its liquid form, also known as superheated or super-critical water [139]. Superheated water has lower polarity compared to liquid water under standard conditions and higher diffusivity; the effect on the starch is to cause the structure to swell, producing a highly porous network. Cooling the gel then “locks” the expanded network in place.

Fig. 5 The generic chemical structure for starch

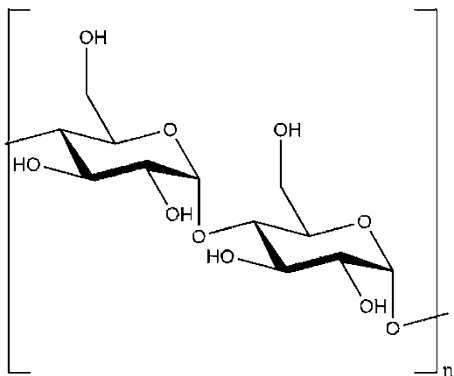

The water is then “flushed out of” the matrix via solvent exchange in order to prevent collapse of the network. Acetylating the expanded starch gel with acetic or propionic anhydride then produces the final adhesive. This material is of interest as it expands the range of surfaces, notably metals, that can be bound using starch based adhesives [140]. However, the key property that differentiates this material from other adhesives is that it only exhibits adhesive properties within a certain temperature range, varying according to the binding surfaces [141]. This allows for selective bonding and de-bonding, therefore, enabling recycling at the end-of-life of the product. This has successfully been achieved in the production of carpet tiles [142]. At present, carpet tile production occurs by irreversibly binding the fabric layer to a bitumen base, leaving no option, but landfill at the end of life. By de-bonding via heating, the base is recovered for re-use with a different material, whilst the fibres can be recycled. This, therefore, represents a significant development for the production of green materials as it uses a renewable resource (starch), which is available in many waste streams from food production, prepares it without the use of harsh acids or alkalis, and enables the final product to be recyclable. Additionally, as starch is non-flammable, the resulting adhesive can produce the tiles without the addition of brominated flame-retardants that are required for many petroleum-based adhesives.

Another notable development for valorising starch has been the production of Starbon[®] materials—mesoporous carbonaceous materials derived originally from starch, but now from a variety of polysaccharides. This process, developed by Budarin et al. [143–145], involves heating starch in water under pressure, in the same manner as producing the initial expanded starch gel for switchable adhesives. The material is then doped with a catalytic amount of organic acid (e.g. *p*-toluene sulfonic acid) and then pyrolysed under controlled heating conditions (again to prevent collapse of the network) to 300–800 °C depending on the desired properties. The higher the temperature, the more hydrophobic the surface properties [146–150]. This process has also been shown to work on alginic acid—another polysaccharide material obtained from seaweed.

These materials are finding use as replacements for activated carbons (AC)—carbon allotropes modified to provide high surface areas. ACs are widely used in

applications such as water purification, filtration, flue gas scrubbing, and catalytic supports. Budarin et al. estimated that the current market for them is almost 1 Mt per year [144]. Because of the high porosity, particularly mesoporosity (2–50 nm pores [151]) generated through the gelation process, these new materials have frequently shown superior properties as adsorbents compared to their AC counterparts—a trait largely attributed to allowing adsorbates easier access to the inner micropores for adsorption. The model that increased surface area on activated carbon allows for greater adsorption to the surface is well established, but Hsieh et al. questioned how much of the surface area was actually available for adsorption. i.e. the increase in surface area was not worthwhile if it simply involved making up micropores too small for adsorbants to fit in, particularly for larger molecules. From subsequent Langmuir and Dubinin–Radushkevich modelling they suggested that increased mesoporosity would allow for increased diffusion throughout the material to access more of the AC surface [152].

For instance, Parker et al. tested the adsorption capacity of Starbons® on a range of phenols [153]. S800 (starch derived and pyrolysed to 800 °C) with a surface area of 535 m²/g was shown to have an adsorption capacity for phenol of 87 mg/g. This compares to 37 mg/g with a coconut coir pith AC with surface area of 470 m²/g [154] representing a 2.35× increase in capacity with just a 1.13× increase in surface area. Apricot stone AC was shown to have a better adsorption capacity of 120 mg/g [155], but this required a surface area of 1306 m²/g; an improvement of just 1.38× despite a 2.44× increase in surface area. A800 (alginic acid derived and pyrolysed to 800 °C) performed even better, demonstrating an adsorption capacity of 89 mg/g despite a surface area of just 265 m²/g.

In a similar study, Garcia et al. tested the ability of Starbons® to adsorb metal ions. Au, Pd, Pt, Ir, Ni, Cu, and Zn were all tested and successfully adsorbed by S800, with partial success in the adsorption of Au—an adsorption capacity of >3000 mg/g was reported compared to just 62–100 mg/g on AC [155]. Adsorption for the other metals were similar to AC results; however, in another crucial observation, both Parker and Garcia were able then to desorb the selected phenol and metal species, presenting the opportunity not just to remediate wastewater, but also to recover materials of interest. The recovery of the platinum group metals is of particular relevance due to their scarcity in the earth's crust coupled with their increasing demand [156, 157]. A recent (2016) case study has been carried out by Tony et al. using Starbons to treat wastewater from commercial laundrettes [158].

The catalytic properties of these materials has also been successfully demonstrated. Because of their high adsorption capacity for metals, several studies exist using metal-based Starbon® catalysts. For instance Luque et al. have reported the successful use of supported metal nanoparticles on Starbon® for Rh, Ru, Pt, and Pd and their subsequent use in catalysing the hydrogenation of succinic acid and other platform molecules [114]. The team were able to achieve selectivity and conversions to their intended products of over 70% in less than 12 h with ruthenium being particularly effective—optimising reaction conditions led to over 90% selectivity and conversion for a range of organic acids [113]. Furthermore, they were able to tune their reaction conditions to achieve different target molecules. Other metal-centred catalytic studies have included Colmenares et al. work

comparing the photocatalytic activity of TiO_2 on Starbon against other AC materials. Over a threefold increase in the rate constants was reported in all instances [159]. Ojeda et al. have also reported their ability to produce Fe, Co, and Cu containing Starbon[®] matrices via a similar method, though at the time of writing they have yet to test their activity on any reactions [160].


Several studies also demonstrate Starbons[®] to be effective as solid acid catalysts. Many chemical transformations such as esterifications, hydrolysis, and hydration of alkenes rely on the addition of a catalytic amount of acid, usually sulfuric acid. After removal of the solvent, the added acid remains in solution and thus generates large amounts of acidic waste. Binding the sulphate group to an insoluble support (such as AC) allows the catalyst to be then filtered off and recovered after the reaction, thereby both enabling recycling and preventing the generation of harmful waste. After developing the materials, one of the first applications demonstrated by Budarin et al. was for sulphonated solid acid catalysis on esterifying succinic acid and ethanol. The Starbon[®]-based materials showed nearly a tenfold improvement on reaction rates compared to other solid acid catalysts and a twofold improvement over aqueous sulphuric acid [161, 162]. Other platform molecules such as itaconic acid and fumaric acid have demonstrated similar trends [163–165]. The material is also proving successful on other acid-catalysed transformations including alkylation and acetylation [166] and even for complex substrates such as the Ritter reaction [167]. It is unclear at present why the increased porosity improves catalytic performance, though a likely explanation is that it is to similar reasons for the adsorption properties; increased pore volume leads to more exposed acidic sites.

Whilst in early phases, the material has also been trialled as a stationary phase for HPLC where it successfully separated a mixture of carbohydrates [168].

2.3 Cellulose

Cellulose, in a similar fashion to starch, is linked through β -glucose units at the 1 and 4 positions (see Fig. 6). Whilst the only difference between α - and β -glucose is that the hydroxyl group on the 1' position is being axial and equatorial, respectively, this difference is key to very different resulting properties as it dramatically alters the bond angle between the two monomers and, by extension, the whole superstructure of the resulting polymer (as illustrated in Figs. 5, 6). Unlike starch, cellulose is insoluble in water, indigestible in many animals (including humans),

Fig. 6 The generic chemical structure of cellulose

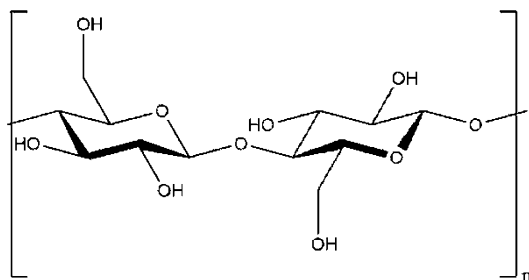

and much more resistant to breakdown. For this reason, cellulose is a structural material in plants, rather than an energy store. Because it makes up the cell walls for the majority of plant cells, it is also the most abundant biopolymer on Earth.

Cellulose itself has a long history of applications in materials production, most notably as the raw material for paper and cardboard, as well as other materials such as cellophane and rayon. Since it is such a strong polymer, cellulose is very hard to break down without respective enzymes, which on one hand makes washing and recycling of the material relatively easy compared to some materials, but on the other can make it hard to process into other materials once recycling is no longer an option. In paper recycling for instance, the fibres get shortened in each recycling step, meaning after 5–6 stages the fibres are too short to be recycled into paper products anymore. One study addressing the valorisation of by-products from paper recycling came from Zhang et al. As with starch, cellulose also has a long history of usage in adhesive production. Zhang et al. investigated the microwave pyrolysis of waste paper and waste residues from the de-inking processes (e.g. fines and ink-sludges) used in paper recycling [169–171]. The standard products (depending on conditions) from microwave pyrolysis are biogas, biochar and a bio-oil, which itself comprises an aqueous and an organic fraction. When curing the organic fraction of the wastepaper bio-oil by hot-pressing between two aluminium plates, Zhang was able to achieve a maximum tensile strength of 2300 N for this adhesive—over twice as strong as the mandatory 900 N typically required for metal adhesion purposes. The de-inking residues did not fare as well, achieving only ~600 N under the same conditions; however, Zhang noted the high amount of sugars and aromatics in the bio-oil suggesting the potential for this material (or the precursor) to be a feedstock for other carbohydrate valorisation methods, particularly 5-hydroxymethyl furfural (HMF) and 5-chloromethyl furfural (CMF) production.

In the context of green materials production from cellulosic biowastes, the production of the furan derivatives HMF and CMF (see Fig. 7) has also become a very interesting development.

Many biomass sources naturally produce HMF through the degradation of sugars and is another noted platform molecule—Fig. 8 provides a selection of molecules derived from it through simple chemical syntheses. Again, the function of these molecules varies considerably. 2-methyl THF is seen as a potential candidate to replace THF as a solvent [172], 2,5-dimethylfuran (sometimes abbreviated to DMF, not to be confused with dimethyl formamide) is a biofuel [173], 5-hydroxy-4-keto-2-pentenoic acid possesses an acid and alcohol group, making a monomer for polymer production [174], as is furan-2,5-dioic acid (FDA) as a di-acid. One of the key challenges for the biorefinery concept is the relative lack of aromatics compared to petroleum. Lignin from woody-biomass represents the most abundant source of




Fig. 7 The chemical structures of 5-hydroxymethyl furfural (HMF-*left*) and 5-chloromethyl furfural (CMF-*right*)

benzene-like rings; however, it is a non-uniform structure rendering it very difficult to break it down into uniform monomers or separate out bio-oils. HMF and CMF help address this challenge as they are, if not benzene-like, both based around aromatic rings.

FDA especially makes for an interesting case study in replacing petroleum-based molecules. Polyethylene terephthalate (PET) is one of the most abundant plastics in circulation and is the most abundant of all polyesters. It has a range of uses, but is most widely recognised for food and drink storage, notably in drinks bottles. The two monomers used to make PET are ethylene glycol and terephthalic acid (benzene 1,4-dicarboxylic acid)—structure shown in Fig. 9. Even though it is furan-based rather than benzene-based, FDA is otherwise extremely similar in structure to terephthalic acid and can be substituted in for producing a new polymer, polyethylene furanoate (PEF) [174]. PEF has not only been shown to be successful in replacing PET in many applications [176], but is also now in commercial production for plastic bottles [177].

However, it is not only the applications of HMF and CMF that make it especially interesting from a biorefinery perspective, but the ease at which it can be manufactured from a range of cellulose based biowastes. HMF production is relatively simple to achieve by dehydrating sugars [178], but from polysaccharides it can be trickier because it has the ability to form polymers itself. Furfural (and furfural derivative) production from sugars has been in place since the late end of the nineteenth century using acid catalysis (both homo- and heterogeneous) to eliminate water [175, 179], with pentoses forming furfural and hexoses forming HMF. However, yields were low (~50%) with polymer coatings on the reaction vessels noted. However, the fact that these polymers partially prevented corrosion of the vessel wall by the acid catalysts employed partially mitigates that point. Since then, many other processes have emerged to improve the yield and efficiency, such as the Agrifurane, Suprayield and Westpro-modified Huaxia Tech processes. However, they all typically employ high (150–240 °C) temperatures, and where


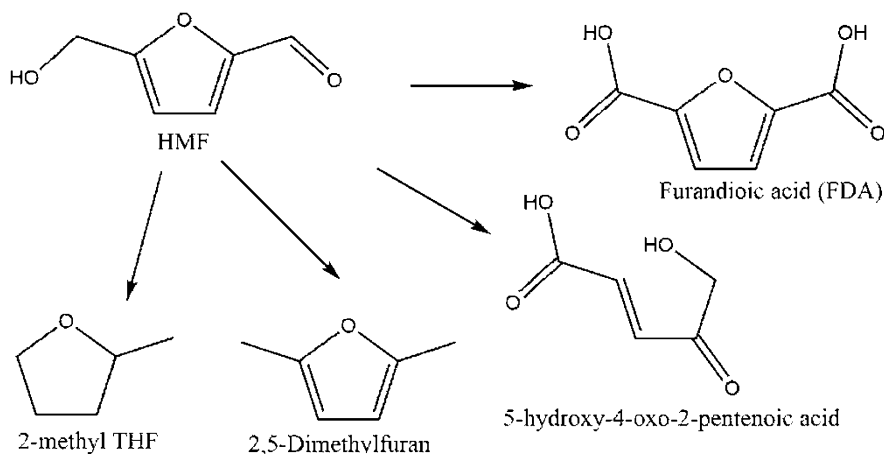


Fig. 8 HMF, *top left*, and a selection of molecules it can subsequently be transformed to [175]

Fig. 9 The chemical structure of PET

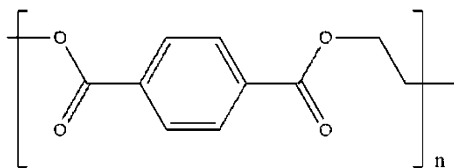

polymerisation is prevented, furfural breakdowns to a mixture of molecules (including formaldehyde) instead [180].


However, a new process developed by Mascal et al. demonstrates the ability to address both the aforementioned problems. By heating sugars in a mixture of aqueous hydrochloric acid and dichloromethane the sugars are easily dehydrated to the furan moiety, but the Cl^- groups from the acid replace the hydroxyl group at the 5-position, thereby preventing the polymerisation route [181]. The newly formed CMF is non-water miscible and, therefore, separates out into a biphasic system, decanted and able to undergo the same reactions as HMF [182, 183]. This process has been demonstrated to work on simple sugars, and cellulose and corn stover have also been successful, providing yields of >75% with levulinic acid as the only major by-product, as opposed to polymer resins or unwanted breakdown products. The fact that the by-product in this case is another valuable platform molecule, therefore, enhances both the green and economic credentials of the process. This process has also been successful under microwave conditions, presenting an opportunity to green the process further by reducing the time and energy inputs [184]. The one drawback at present, however, seems to be the inability to replace dichloromethane as the production solvent.

Neither starch nor cellulose typically exist in the ideal “pure” forms given in Figs. 4 and 5. The starch shown in Fig. 4 is the linear amylose variety, but there can also be branching at the 6-position to another α -glucose molecule, which is the amylopectin variety. Most starch consists of different ratios of the two, but amylase enzymes easily break down most forms and the ratios tend to make little difference to the described methods. Cellulose, on the other hand, frequently occurs entwined with large amounts of hemi-cellulose and pectin. Hemi-cellulose is a complex polysaccharide comprised of an indeterminate number and types of sugar molecules. As such, it is very hard to categorise and separate and many of the described valorisation techniques tend to focus on either removal of it for purified cellulose, or to break it down and ferment/process it along with the cellulose.

2.4 Pectin

Pectins, however, are also becoming of interest for material properties. They are another group of complex polysaccharides present in non-woody biomass mainly in the primary cell wall and intercellular regions [185]. They are composed of an α -(1-4)-D-galacturonic acid polymer chain (sometimes esterified with a methyl group—see Fig. 10) which, when unbranched, is known as homogalacturonan (HG) or the “smooth region”, and a “hairy” region, which comprises branched, neutral sugar chains (see Fig. 11).

Fig. 10 The general chemical structure of pectin

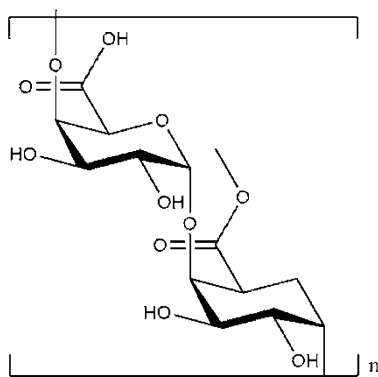

The degree of esterification, level of branching, and, as with all polymers, average chain length and molecular weight distribution can all vary between biomass sources and can ultimately impact the overall properties [187]. Pectin extraction is a highly attractive valorisation method for fruit waste since pectin is present in high concentrations within fruit and has many applications within the food manufacturing industry for its ability to form a gel in water [188]. The degree of “smoothness” or “hairiness”, the degree of esterification (DE), amount of galacturonic acid (GA) and uronic acid, viscosity, and average molecular weight [189] are all properties governing the potential gelling properties of the pectin. This availability along with guaranteed demand means that pectin extraction could be one of the most lucrative aspects of fruit biorefinery systems. However, as these parameters differ depending on the source, if extraction of pectin for use in the food industry is the goal, rigorous analysis is needed to determine these values.

Mango waste, especially the peel, has been shown to have great promise as a potential source of food grade pectin with extraction yields of up to 21% [190] and promising values for the GA and DE. Traditionally, mineral acids have been employed in the extraction of pectins; however, this conflicts with the principles of green chemistry [191], due to their hazardous nature, and also they are unselective, meaning pectins extracted using this method have high neutral sugar content [192]. This technique is also time consuming [193], and although a high yield is generally obtained, the long extraction times at high temperature leads to thermal degradation [194, 195] of the pectin, lowering the average molecular mass [189]. More green extraction methods have been explored including using ammonium oxalate or ultrasound- and microwave-assisted extraction (MAE) techniques with quoted pectin yields of up to 11.6% [193, 196]. These extraction techniques have all been shown to be more selective and less harsh, yielding non-degraded pectin in high yields with good values for the GA and DE, along with high molecular mass and viscosity [189].

The variety of uses for sugars and starch is interesting as it highlights the potential to derive platform molecules from carbohydrate waste, analyse using HPLC, and convert them to materials all from carbohydrate-based resources.

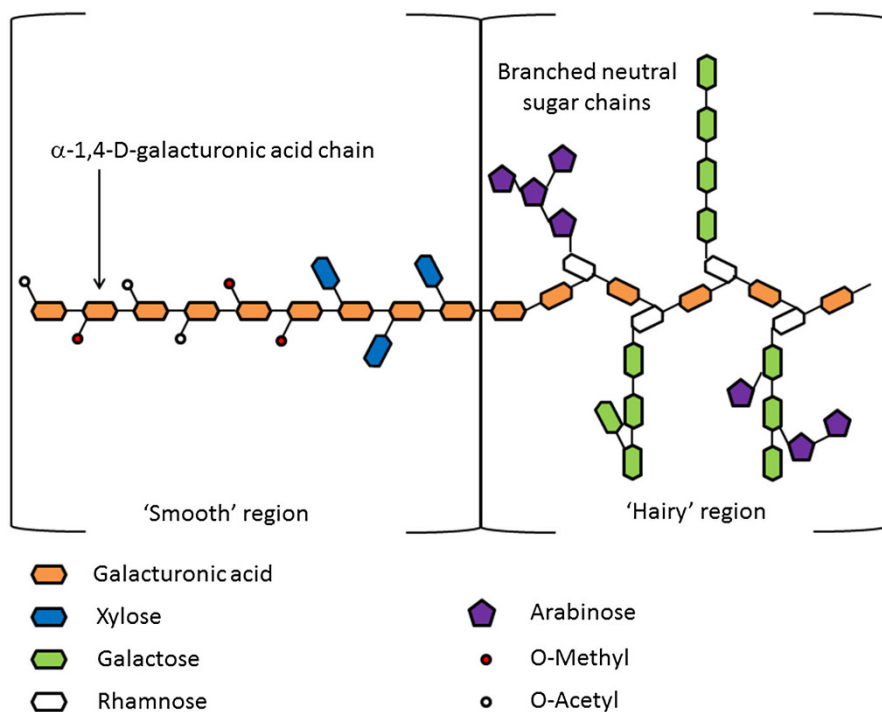


Fig. 11 General structure of pectin [186]

3 Lipids

Converse to carbohydrates, lipids are the most hydrophobic of the three macronutrients and used in biological systems primarily for energy storage and as water repellents/surfactants. The two principal components in lipid systems are glycerides and fatty acids. Triglycerides, where three fatty acids are bound to one molecule of glycerol via ester bonds, occur more frequently in edible vegetable and animal oils and fats. Phospholipids, similar to triglycerides, but with one fatty acid replaced by a phosphate group, are the principal components of cell membranes, responsible for maintaining an aqueous environment inside the cell by creating a hydrophobic environment outside [197]. Figure 12 shows the structures for both.

Figures 13 and 14 give the generic structures for fatty acids. Saturated fatty acids are essentially simply long chain, unbranched carboxylic acids where, generally, $n > 5$. The most common ones are $n = 8$ or 9 (16 or 18 carbons long). Unsaturated (both mono- and polyunsaturated) fatty acids also consist of one or more double bonds along the chain, always separated by one carbon atom (i.e. no conjugation) and always *cis*.

Extraction of lipids from biomass also typically requires solvent extraction with non-polar solvents. Hexane is a common choice, but is on ChemSecs SIN list as of 2016 [198], substances of very high concern, under the criteria set up by REACH (the Registration, Evaluation, Authorisation, and Restriction of Chemicals) [22].

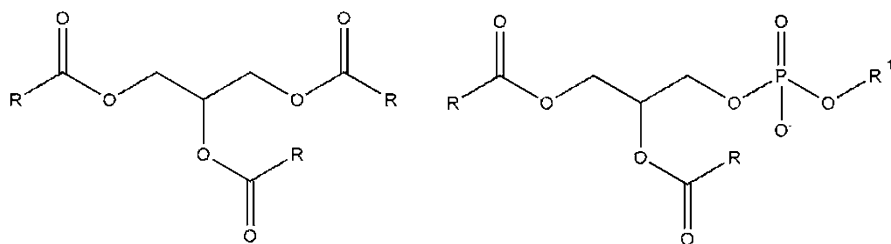


Fig. 12 The generic structure of triglycerides and phospholipids, the two most common lipid systems

This being the case, heptane is a greener alternative (based on toxicity), which is becoming more attractive for this purpose due to similar solvation properties [185, 199, 200].

Supercritical CO_2 extraction is an interesting alternative green solvent to hexane. This is attractive since CO_2 is low cost, inflammable, relatively inert, has low toxicity and a wide range of solvent properties depending on its temperature and pressure [200]. The term supercritical refers to a fluid, which is under pressure and temperature greater than the critical point (see Fig. 15) meaning that the fluid exhibits the properties of the gaseous and liquid phase whilst being a single phase [201]. The density of the fluid is closer to that of the liquid, and as solubility increases with density, pressure, and temperature, supercritical fluids exhibit a large absorption capacity. The gaseous properties of the super critical fluid allow for efficient extraction due to its highly diffuse nature. Once the extraction is complete the extract can be easily collected by reducing the pressure in the collection vessel until the fluid becomes a gas again, causing the extractant to “fall” out of the solution, negating the need for solvent removal through more conventional methods. Table 3 provides a selection of oil yields from supercritical CO_2 from various feedstocks.

Another technique is use of subcritical water, previously mentioned in expanding starches. This allows for fast, cheap, green extraction [208] and low working temperatures [209]. Although the temperature is relatively high for water-based operations, the extraction method is so fast that it aids the retention of volatile and thermally sensitive components. This is where subcritical water extraction differs from classic steam distillation, because although steam distillation is run at 100 °C the run time is much longer, increasing the likelihood of compound degradation and loss of volatiles. Because the temperature of the water is increased, its polarity as a solvent decreases, allowing for extraction of compounds, which are not typically water soluble [210]. Subcritical water is generally cheaper than supercritical CO_2 because increasing the temperature of a system is cheaper than increasing the pressure. Table 4 provides a selection of yields from subcritical water extraction from various feedstocks.

As one of the roles of lipids in the cell is to partition aqueous and non-aqueous environments, it is unsurprising that one primary means of valorising waste oils is as surfactants. The most common form is base hydrolysis to form fatty acid salts, which form the bulk material for soaps (hence, the common name for the reaction is

Fig. 13 The generic structure of saturated fatty acids

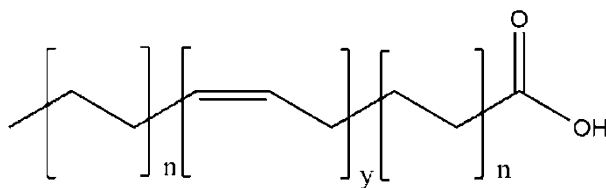



Fig. 14 The generic structure of unsaturated fatty acids

Fig. 15 Typical phase diagram showing subcritical and supercritical conditions

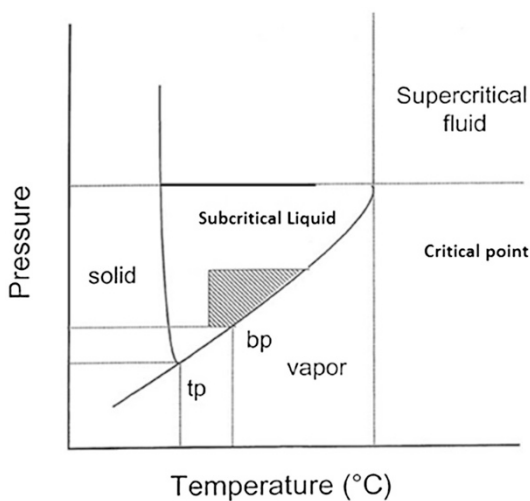


Table 3 A selection of oil yields from various feedstocks obtained from supercritical CO₂ vs conventional solvent extraction (CSE) yield

Feedstock	Temperature (°C)	Pressure (bar)	Yield (%)	CSE yield (%)
Soybean [200]	50	552	18.3	19.0
Wheat straw [202]	100	400	1.8	1.17
Corn leaves [203]	65	400	1.76	
Linseed [204]	70	550	25	38
Rosehip [205]	40	300	8.78	8.99
Lavender [206]	48	90	4.9	4.9
Rice bran [207]	100	620	20.4	20.5

Table 4 A selection of yields from various feedstocks obtained from subcritical water vs steam distillation (SD) yield

Feedstock	Temperature (°C)	Pressure (bar)	Yield (%)	CSE/SD yield (%)
Ziziphora [209]	150	60	1.56	1.32 (SD)
Cretan Oregano [211]	150	60	3.76	3.58 (SD) 3.62 (CSE)
Rosemary [212]	150	20	0.05	0.05 (SD)
Kava [213]	100	60	9	5.7 (CSE)
	175	60	10.4	
Marjoram [214]	150	5	1.24	0.244

“saponification”). However, the role of lipids as surfactants and emulsifying agents has attracted the attention of other fields as well. Do, Attaphong et al. studied the use of adding sulphate and phosphate groups to the acid head of free fatty acids to increase the hydrophilicity of the “head” end of the molecule. They were able to use them to make emulsions without the use of a co-oil with applications in cosmetics, vegetable oil extraction [215] (the latter is particularly relevant in light of the potentially upcoming restrictions on hexane) and viscosity modifiers for biofuels [216].

Another traditional use for animal and vegetable oils and fats prior to petroleum is as greases and lubricants to reduce friction between moving surfaces. Standards for performance in, e.g., engines have become more stringent since the advent of petroleum. In addition, there are many new applications, such as computer hard disks, that have emerged since the advent of petroleum, meaning that oils and fats cannot be directly applied to some traditional and novel applications, but require some form of processing first. Mobarak et al. investigated the long term stability (oxidative, hydrolytic, thermal, etc.) and properties of vegetable oils compared to their mineral counterparts [217]. They noted that vegetable oils were typically less thermally and oxidatively stable due to the presence of unsaturated fats. They also noted that they typically offered better lubricity during their lifespan, as well as lower volatility and, therefore, emissions. From this, they compared the different oil properties with industrial applications to suggest a “best-fit” for each. Since vegetable oils are major targets for automotive fuel in the form of biodiesel, it is perhaps unsurprising that the majority of literature on bio-lubricants have an emphasis on the same field—including the applications suggested by Mobarak. For instance, Bokade et al. studied the possibility of transesterification of vegetable oils to both biodiesel and bio-lubricants by altering the alcohol moiety [218]. They observed a lower conversion from triglycerides to monoesters as the alcohol chain length increased, but ultimately concluded that for *n*-octanol a 72% yield and 78% selectivity was still sufficient for the selected catalysts when considering the implications for being able to produce both commodities in the same process, same catalyst, etc. Salimon et al. attempted expand on this by using unsaturated fats to their advantage by adding other hydrophobic or hydrophilic groups to these sites and were, therefore, able to expand the usage of bio lubricants to other more

advanced applications, notably as hydraulic systems and lightweight gas turbines [219].

Within the unsaturated fatty acids, the nature of the double bonds provides more options to perform chemistry on for higher value products. As with all double bonds, they are prone to autoxidation reactions [220]. However, in polyunsaturated fatty acids, as a carbon atom separates the double bonds, the double bonds are particularly prone to oxidation. This is because the process creates either an ion or radical intermediate that is stabilised by migration of one of the double bonds to form a conjugated system upon formation of the final product. Therefore, there is a strong thermodynamic driver due to the lowering the Bond Dissociation Energy of the allylic C–H bond [221–224] (mechanism shown in Fig. 16, where R is typically O_2 , $RO_2\cdot$, or $RO\cdot$) [225].

Autoxidation of double bonds can also occur by direct addition across the double bonds to form epoxides [226–228]. The subsequent ring opening ability of epoxides from petroleum-based alkenes has long been exploited to create resins with a broad range of useful properties specific for application such as high strength, excellent corrosion and weather resistance, and excellent electrical insulation [229, 230]. Cross-linking agents are frequently used to open the epoxide rings and form a polymer matrix (structure shown in Fig. 17) [231].

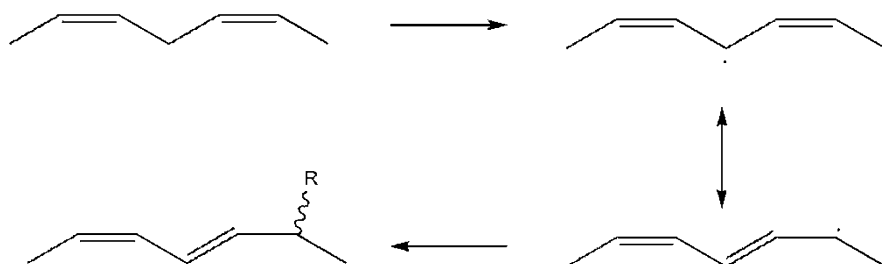


Fig. 16 The migration of double bonds

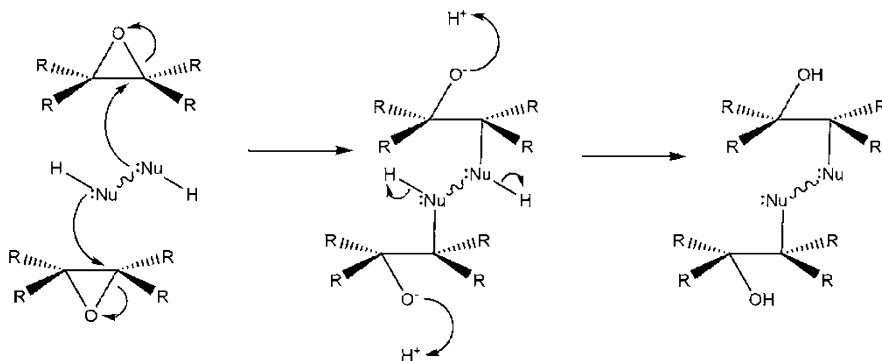


Fig. 17 Cross-linking mechanism to form epoxy resins

However, the energy required for epoxidation is greater than the energy required for breaking the allylic C–H bond [232]; therefore, in addition, a petroleum-based alkenes the process to make traditional epoxy resins also deploys more specific oxidising agents and/or heat. For instance, Prilezhaev process uses formic acid and hydrogen peroxide to form performic acid, which is then used to carry out the epoxidation of the alkene [233, 234]—Fig. 18.

As fats and oils have always been commodities, epoxy resins from vegetables are also established products. However, the cross-linkers used are often still petroleum derived. Commonly, amines are used as hardeners due to the nucleophilic nature of the electron-dense nitrogen. Aliphatic amines are more nucleophilic than aromatic amines (where the aromaticity will withdraw electron density from the nitrogen), therefore, frequently involving the use of ammonia in preparation. Amine-based cross-linkers, therefore, potentially expose workers to harmful substances at both the production and usage stages of the operation through ammonia and amines, respectively. Park and Lin also voiced concerns about inadequate electrical and heat resistance [235].

Stemmelen et al. tried to use cysteamine hydrochloride, a dehydrated analogue of cysteine, to add directly to the double bonds of fatty acids through the thiol moiety before using the amine moiety to open the epoxides on another fatty acid chain as a means of creating a bio-derived cross-linker [236]. However, the initial reaction requires dioxane as a solvent, with chloroform, hexane, and diethyl ether as alternatives, all of which are typically derived from petroleum and face severe restrictions under REACH.

Gerbase et al. synthesised several epoxy resins from soybean oil using a range of petroleum and bio-derived acid anhydrides (including succinic anhydride and maleic anhydride) that were able to display a range of thermal and mechanical properties, demonstrating a good degree of versatility; however, they still required the use of a tertiary amine (often trimethylamine) as a reagent [237]. Mahendran et al. carried out similar work with linseed oil, achieving similar results, but managing to replace the amine reagent with an imidazole catalyst [238].

In 2004, Park and Lin investigated the production of epoxy resins from soybean and castor oil without the use of a cross-linking agent, using only a catalyst, *N*-benzylpyrazinium hexafluoroantimonate (BPH—structure shown in Fig. 19) [239]. They reported that the resins both had a relatively low glass transition temperature, but a low coefficient of thermal expansion when compared to conventional diglycidyl ether of bisphenol A (DGEBA) resins synthesised under the same


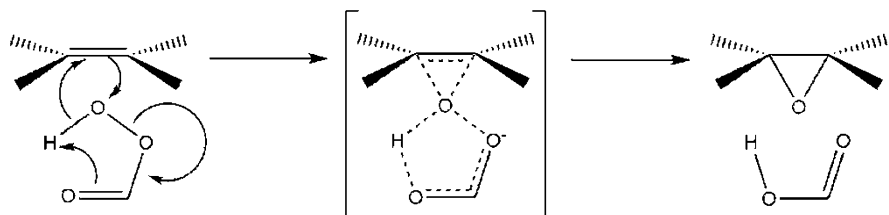


Fig. 18 The Prilezhaev process for forming epoxides

Fig. 19 The chemical structure of *N*-benzylpyrazinium hexafluoroantimonate, BPH



conditions [240, 241]. Similarly, in 2010, Altuna et al. synthesised pure epoxidised soybean oil (ESO) resins and DBEBA resins and mixtures of the two using a methyltetrahydrophthalic anhydride cross-linker and found that the glass transition temperature steadily decreased with an increasing amount of ESO. However, they also noted that the impact strength increased with a 40:60 mix of ESO:DGEBA, whilst the storage modulus remained relatively constant [242].

More recently in 2015, Ding et al. have reported using bio-based di-carboxylic acids as cross-linking agents for epoxidised linseed oil [243]. They observed that shorter acid chain length led to higher glass transition temperatures and better mechanical properties, but lower thermal stability.

The different properties resulting from the differing feedstocks and curing methods give the potential to produce a wide range of resins from lipids. Literature reviews on the subject seem to be largely positive, even if there are still issues to be resolved. Galià et al. [244] did an overview of vegetable oil-based polymers, highlighting deficiencies in flame retardant properties of pure vegetable oil epoxy resins and suggested that in order to obtain desired hardness properties, traditional cross-linkers used in petroleum resins would not be sufficient. They highlighted a need for novel resins to be developed. This was echoed by both Lu and Larock [245], who also noted that many of the cross-linkers needed for epoxy resins were still petroleum based. Tan and Chow [246] reported that epoxidised vegetable oil resins still needed to be blended with petroleum epoxy resins for many applications due to deficiencies in toughness and hardness. However, they also noted that advancements in oleochemical technology were addressing many of the shortcomings and concluded that “when being treated with proper curing agents, it is strongly believed that epoxidised vegetable oils have the potential to fully substitute current petroleum-based materials”. To this end, Ding and Matharu [247] conducted a review of the different curing agents available from biomass and also noted a variety of modified lipid-based curing agents available, as well as from carbohydrates and proteins, suggesting a great potential to address the concerns noted in the previous two reviews.

The production of such composites dates back to as early as 1997, where Crivello et al. explored a composite using glass-fibre mixed with linseed oil, which they suggested for use in standard domestic applications such as roofing, culverts, and low-pressure pipework [248]. More recently, in 2014, Supanchaiyamat et al. reported using epoxidised linseed oil and expanded starch (from the aforementioned Starbon[®] process) to produce a fully bio-based composite with 227% improvement in tensile strength and 166% enhancement in Young’s modulus, compared to those with no added starch, suggesting it as a replacement for vinyl based films [249].

Fig. 20 Glycerol. The major by-product from biodiesel and soap production

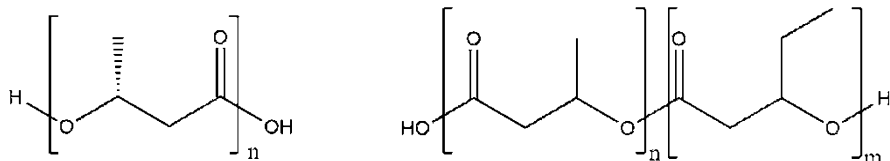



Fig. 21 The chemical structure of poly 3-hydroxybutyrate (PHB—*left*), the most common class of polyhydroxyalkanoates, and its *co*-polymer poly (3-hydroxybutyrate-*co*-3-hydroxyvalerate) (PHBV—*right*)

Other biopolymers from lipids have also been investigated. Polyurethanes, for instance, have been extensively studied by Petrović et al. by hydroxymethylating unsaturated acids—particularly oleic acids [250]. In his review, he noted the ability of ozonolysis of double bonds to produce diacids, aldehydes, and alcohols from double bonds for further polymerisation to polyurethanes and polyols [251]. He reported that the ability to select triglycerides with only one type of fatty acid allowed for greater control of mechanical properties, although noted that as all the major unsaturated fatty acids possess their first (counting from the acid moiety) double bond at the 9' position, that ozonolysis or hydrolysis could achieve that required uniformity. However, he also cautioned that adding additional steps would inevitably drive up the cost of producing the material, which is undesirable for competing with cheap petroleum.

Overall, whilst there has been a large amount of research investigating the use of vegetable oils for bio-based polymers and resins, there is unfortunately no literature at the time of writing using these emerging technologies on waste oils such as used cooking oil or spent coffee oil. There has been research on applying these technologies to non-edible oils such as karanja [252–254] and jatropha [255–257] with comparable results suggesting that the same technologies have the potential for application to waste oils—providing there is an appropriate amount of olefins to carry out the chemistry on. However, this is not confirmed at the time of writing, although Petrović did highlight the potential for fish oils to produce monomers via ozonolysis due to the high number of double bonds typically [251].

However, there has been a significant amount of work carried out on glycerol-based polymers, which is the primary waste product generated from soap production, biodiesel production, and any other process that cleaves the fatty acids from the triglycerides (structure shown in Fig. 20).

A relatively well-researched area is fermentation to a class of polymers known as (PHAs), most notably poly 3-hydroxybutyrate (PHB—structure given in Fig. 21, left) [258, 259]—structure shown in Fig. 20. PHAs, as mentioned before (with levulinic acid given as an example) are a common class of biosynthesised polymers, but PHB is of particular interest. As well as being the most common of all PHAs, it

is biodegradable and biocompatible leading to its application in medical devices and implants, in particular when produced with 3-hydroxypentanoic acid to produce poly 3-hydroxybutyrate-*co*-3-hydroxyvalerate (PHBV—structure given in Fig. 21, right), which is sold under the trade name Biopol.

Because of the biorefinery concept, it is perhaps inevitable that the production of these from crude glycerol (as opposed to pure, commercial grade) has attracted research interest. Mothes et al. investigated the effect of common contaminating salts from biodiesel production on the yield of PHB from glycerol and showed that whilst a 5% NaCl contamination led to a 48% reduction in PHB yield, K₂SO₄ showed minimal effect. Furthermore, the molecular weight distribution was between 620,000 and 750,000 g mol⁻¹ was comparable to that of commercial PHB, indicating a good potential for crude glycerol mixes to be used in existing manufacturing methods [260]. Comparing commercial methods, Naranjo et al. demonstrated that the yield of PHB using glycerol as the feedstock could be as high as 62%. This is the same as for sugarcane bagasse and only 2% lower than whey, and they subsequently suggested that, since glycerol is produced as a waste product, the profit margin for PHB from glycerol could be up to 20% higher than glucose-derived PHB [261]. In a more complete biorefinery structure, Kachrimanidou et al. demonstrated not only the production of PHB from crude glycerol, but also the production of PHBV from a mixture of crude glycerol, sunflower meal (the leftover residue from oil extraction in biodiesel production) and levulinic acid, thereby using all by-products from biodiesel production [262].

Other monomers from crude glycerol have included the work of Papanikolaou et al. in the production of 1,3-propanediol using crude glycerol (65% purity). This was obtained from a mixed-feedstock biodiesel production plant, with the same study also demonstrating the production of citric acid from the same feedstock—itsself an important nutrient for fermentation of many of the products outlined in the carbohydrates section [263]. Vivek et al. built upon this to enhance the propanediol yield to as high as 0.83 g per g of glycerol [264]. Another example is the production of acrylonitrile from glycerol by Calvino-Casilda et al. by using niobium-doped Sb_nV/Al₂O₃ catalysts [265].

4 Proteins

Of the three groups of macromolecules in biomass, proteins are arguably the most varied and complex. The main units of proteins are amino acids—essentially a carbon centre bonded to an amino group, a carboxylic acid group, a hydrogen atom, and an R group (see Fig. 22). The amino acids themselves join through amide bonds (more commonly known as peptide bonds in protein chemistry—see Fig. 23) between the amine and acid groups, but it is the R groups that are crucial for determining the nature of the protein. The R groups include other acids, amines, aliphatic chains, and aromatic rings providing a range of polarities and hydrophobicities. The sequence of the amino acids (primary structure) ultimately determines the (secondary and tertiary) structure and nature of the protein. In their review on

Fig. 22 An amino acid, the building block for proteins

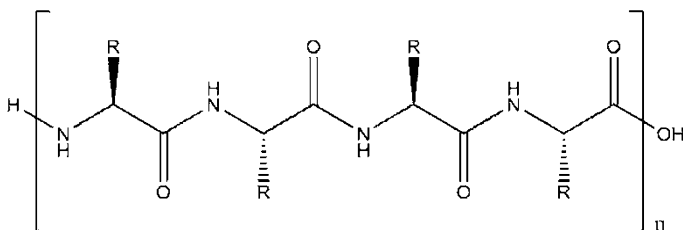



Fig. 23 A chain of amino acids linked via peptide bonds

isolation of vegetable proteins, Rodrigues et al. noted that “in theory, there is a limitless number of proteins with unique properties” [266].

Whilst the wide range of structures of proteins makes for a similar wide range of materials and products, they also make protein processing a very challenging task, as there is no “universal” approach. In addition, whilst rendering of fats and sugars for various purposes is established, protein extraction is a relatively new area. Nevertheless, there is still extensive research detailing the pros and cons of differing extraction and processing methodologies for different proteins, as well as their uses.

Most notably, as protein is a major macronutrient required by the body and traditionally consumed through meat, the rise in popularity of vegetarian and vegan diets has driven up the demand for plant-based proteins [267, 268]. Protease inhibitors from potatoes, for instance, are a very new development within the scope of potato valorisation. The protein obtained from potato is rich in lysine, which is one of the essential amino acids; because of this, potato protein is stated to be of higher quality than many other vegetable proteins [269, 270]. The protein quality is roughly 70% that of whole egg protein, as calculated using the EAAI (Essential Amino Acid Index) estimation of the amino acid composition [270, 271]. One interesting application for potato protein is because one of the protease inhibitors present (namely PI2) has been proven to be an appetite suppressant. It achieves this by inhibiting both trypsin and chemotrypsin, which constitute a negative feedback signal for cholecystokinin secretion, which creates a satiety feeling [269]. The study quoted that 82% of trypsin inhibition and 50% of chemotrypsin inhibition through potato protein is due to PI2. Kemin Health (marketing it under the trade name Slendesta[®]) has quoted that the required dose of PI2 needed to create the satiety effect is in the range of 300–600 mg and, therefore, can be taken in tablet form [272]. PI2 has a molecular weight of around 21 kDa and as such has scope to be separated via ultrafiltration; this system could theoretically be made to an industrial scale if PI2 separation was desired [273, 274].

A system has been developed that allows for PI2 concentration within the protein isolate; the separation of PI2 can be performed due to its relative stability concerning heat when compared to other potato proteins. PI2 is stable to above 70 °C, whereas patatin (another high concentration potato protein) is denatured and, therefore, precipitates out of solution at around 45–55 °C. This means that if the PFJ was heated to around 70 °C for a specified amount of time, the majority of the other proteins will precipitate out of solution, and the PJF could then be centrifuged to remove the precipitate and then the concentrated PI2 precipitated out using one of the different methods described above (ammonium sulphate, for example) [273, 274].

Within the field of chemistry, just as with carbohydrates and fats, another key use of proteins is the use of constituent amino acids as platform molecules. With the exception of glycine, where the R group is another hydrogen atom, all amino acids are chiral. However, unlike in traditional chemical synthesis, which produces both enantiomers in roughly equal amounts, in biomass the amino acids occur almost exclusively in the L-isomer. This makes them extremely useful in asymmetric synthesis either in introducing a chiral centre as part of the functional structure of the molecule or as a temporary attachment to create diastereomers and thus facilitate separation [275]. It should be noted, however, that the latter is frowned upon in terms of green chemistry, which seeks to avoid the use of temporary analogues, such as protecting groups—particularly if the unwanted enantiomer is then consigned to waste [46]. Nevertheless, asymmetric synthesis is an integral tool for synthetic chemists, particularly for drug development whereby one enantiomer may be inactive, or even harmful. The production of enantiomerically pure compounds similarly requires testing, purifying and quantifying in the production process. In order to interact differently with different enantiomers, many of the reagents and catalysts [276], HPLC stationary phases [277, 278], etc. often need to be in enantiomeric excess themselves, further highlighting the essential role of amino acids and proteins as platform molecules.

The field of health drug discovery has also highlighted other innovations for protein valorisation. Whey protein from cheese production is of particular interest in this field as it contains all 20 amino acids making it a very rich nutrient source for the body to construct its own proteins. Athletes and sportspeople will be familiar with the presence of whey protein powders in gyms and sports shops to enhance muscle growth [279–281], but the ability to help the body synthesise its own necessary proteins means it is also being investigated as an alternative to glucose as a drug-delivery media [282]. There has also been reported success in weight loss [283, 284], anti-cancer [285], tissue regenerating [286, 287], and anti-inflammatory medications [288]. Smithers has forecast a large growth in this field for whey protein; however, he noted the need to make use of emerging, non-thermal technologies, such as pulsed electric field [289], for extraction and isolation in order to make the applications cost-effective [290].

Collagen is another protein that has been studied for drug delivery purposes [291]. Collagen is the most abundant protein in animal bodies, providing the structural integrity for body tissue [292] and is a particularly abundant by-product

from seafood production [293]. For applications, a drawback is that it is non-vegetarian friendly—although whey protein is similarly non-vegan friendly.

Keratin is another common polymer, which is of interest for its structural properties [294]. Keratin is an insoluble protein that makes up the exterior parts of animals such as hair, nails, claws, feathers, etc. Historically, the most prominent use of keratin has been the spinning of sheep's wool or other hair/fur for material such as woollen garments or angora. However, the harder keratin types, such as those that make up feathers are now becoming more of interest due to the quantities of waste feathers generated in the poultry industry. The proteins here are typically hard, insoluble, and mechanically strong—properties generally attributed to the high amounts of cysteine side chains able to provide “built-in” cross-linking groups via disulphide bonds—see Fig. 24.

Tanabe et al. studied the polymerisation of films from keratin in a similar manner to resins from lipids [295]. However, as before, the use of a cross-linking agent was required to get the highest tensile strength of the films; however, glycerol proved to be the best cross-linking agent, whilst films mixed with chitosan also demonstrated superior mechanical properties to keratin alone. As both these materials are discarded as biowastes in large quantities, this presents an interesting opportunity for an integrated biorefinery by using feedstocks from different sources. However, from a green chemistry perspective, the use of sodium dodecyl sulphate and, particularly, 2-mercaptoethanol to extract and prepare a solution of keratin is less desirable. Poole et al. investigated the use of both chicken feather keratin and wheat gluten for the production of protein fibres, comparing them to other natural (e.g. cotton and silk) and synthetic (e.g. nylon and polypropylene) fibres [296]. Whilst on the low end of the molecular weight distribution range required, feather keratin still showed all the required properties in terms of crystallinity, cross-linking sites, and ability to form threads. Wheat gluten showed a more desirable molecular weight distribution, but did not perform as well in the rest of the properties desired. Furthermore, feather keratin estimates suggest them to be available in up to five million tonnes annually in very consistent quality, and unlike Tanabe's work, did not require additional cross-linking agents. However, Poole et al. also noted the difficulty in solubilising the keratin that Tanabe had observed, suggesting the need for a green extraction method to be able to validate polymers and fibres from keratin as a “green” material.

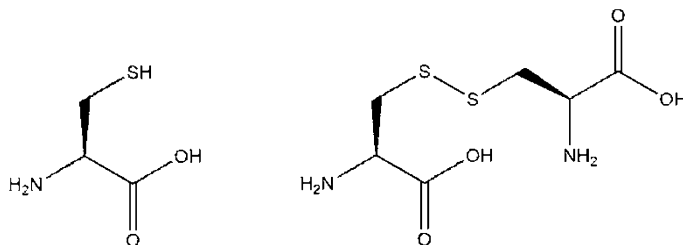


Fig. 24 The chemical structure of cysteine (*left*) and cross-linking with itself in a disulphide bond to form cystine (*right*)

5 Case Studies

5.1 Potatoes

This review so far has covered the different components of biomass and potential processing methods to different materials. In order to realise these concepts efficiently it is necessary to bring these methodologies together. This final section will look at some case studies, where (a) the different parts of a biowaste are refined into their respective materials, and (b) different materials are brought together to make finished products.

As mentioned earlier, 19% of a potato's composition by weight is starch [136], but they also contain proteins; roughly 2% by weight, as well as other higher value components such as protease inhibitors found within the potato protein; these have been shown to have an appetite suppressing effect on mammals [269, 297]. Figure 25 summarises the main steps in a theoretical bio-refinery system based on existing systems already utilised within the potato industry.

A summary of the potential steps is as follows:

1. Removal of dirt/sand
Washing of the tubers with water to remove excess dirt and sand. This aids in maintaining operational integrity in the system by removing impurities that could damage fast moving machinery.
2. Tuber milling/rasping
Milling of the tubers to open tissue cells allowing extraction of the starch. Optimisation of this step is required to achieve maximum tissue milling without negatively affecting later filtration steps. Sodium hydrogen sulphite is sometimes required at this point to prevent discoloration. Achievable throughput has been quoted to be in the range of 20–30 t/h [298].
3. Separation of potato fruit juice (PFJ)
There are a variety of systems described in the literature for the separation of the protein rich potato fruit juice, the majority utilise some form of centrifuge based decanter system to separate the liquid phase containing soluble proteins from the pulp containing the insoluble starch fraction. Because of the need for excess water to wash the pulp to ensure maximum protein recovery, wastewater from the starch purification step later in the supply line can be used, allowing for the reduction of water used within the system.
4. Fibre extraction
Separation of the pulp resulting from the PFJ separation into fibre and starch using centrifugal sieves, jet extractors, or centrisieves. It has been quoted that optimised methods can yield a >95% yield of starch with a maximum throughput of 30 t/h [298].
5. Starch de-sanding, refining, de-watering, and drying
De-sanding of the crude starch using hydrocyclones and several washes to remove protein and other soluble components (this water is recycled earlier in the process). Drying of the purified starch happens through a variety of methods; the one quoted in the literature involves use of rotating vacuum filters

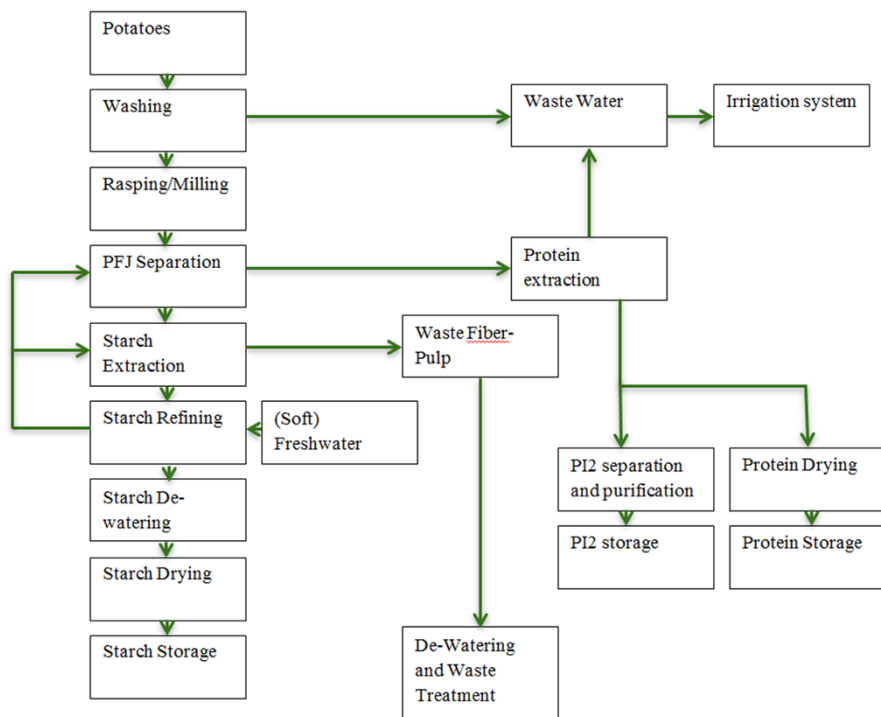


Fig. 25 Process flow for proposed potato bio-refinery [298]

to reduce water content to 38% followed by flash drying to reach a final water content of 20%. Any aggregates produced in the drying step are fed back into the milling step.

6. Pulp de-watering
Drying of the waste fibre-pulp produced to aid in waste treatment.
7. Protein recovery

Protein recovery is an attractive addition to the existing starch extraction procedure, as it uses one of the current waste streams as the starting feedstock—for example, the PI2 protein discussed earlier. The wastewater from the starch process needs processing to obtain the protein; research on different precipitation methods is summarised in Table 5. The different methods for precipitation result in protein with different properties, so there is scope to tailor the precipitation method to suit the proposed protein use. There is also the issue of waste management; some of these precipitation methods use acid and therefore would complicate waste treatment procedures.

Summarised in the above table is the ratio of the various proteins in the extracted protein isolate. These are important to consider as they change the nature of the protein extracted. PFJ in its non-precipitated form has been quoted within the literature to contain 22.9–38% patatin, 45.6–56% protease inhibitors, and 9–23.7% higher molecular weight proteins; this variation is heavily

Table 5 Different protein yields and properties with regard to precipitation method [269]

Precipitation agent	Max protein yield (%)	Purification factor	Patatin (%)	PI 25–21 kDa (%)	PI 20–15 kDa (%)	PI <15 kDa (%)	HMW proteins (%)
Thermal/acid	90.2	0.74	37.9	0	20.2	31.3	10.7
Acid	64.7	1.26	11.1	9.9	15.3	17.4	46.4
FeCl ₃	75.2	6.24	21.7	18.7	23.2	34.3	2.0
MnCl ₂	16.8	1.52	20.4	0	30.9	44.2	4.6
Ethanol	55.2	3.79	37.7	8.0	22.4	26.5	5.4
(NH ₄) ₂ SO ₄	98.8	2.99	31.1	7.6	23.7	26.3	11.3

dependent on the variety of potato extracted [269]. As can be seen, the ratio of proteins in the isolate is heavily dependent on the precipitation method, with more thermally labile proteins such as patatin being more prone to precipitation via heat, whereas thermally stable proteins such as the protease inhibitors are more sensitive to other precipitation methods. This shows scope for tailored precipitation methods depending on the intended application for the protein isolate.

Another important factor to consider for use of extracted potato proteins as a food additive is the solubility in water. Once again, it is the protein precipitated using ammonium sulphate that performs particularly well here with solubility at pH 7.0 ranging from 78 to 89%; this indicates that the protein retains its conformational structure, proving that precipitation using ammonium sulphate is a soft technique (does not destroy/alter the protein).

8. Waste pulp and water

The waste streams produced from this system require consideration. There are two main avenues of waste from the above-described process, one is the aqueous waste stream, and one is the solid pulp waste stream. The amount of waste water is reduced by recycling the fresh water used in the starch refining step in previous steps; this allows for the reduction of water used down to 0.4 m³/t of potatoes as quoted by Bergthaller et al. [298]. The unavoidable wastewater has the potential for re-use in the irrigation system used for growing the potatoes. The water stream will also be contaminated with the precipitation agent used to recover the protein isolate; this could potentially help in choosing the method of protein extraction; acidified water streams are obviously not desirable for crop irrigation, whereas use of ammonium sulphate (which is commonly used as a fertilizer) is more desirable. The waste fibrous pulp, however, requires further research into its potential valorisation routes.

9. Testing for glycoalkaloids

Testing the concentration of glycoalkaloids within the extracted protein is very important if the intention is to produce it as a food additive. Alkaloids are frequently toxic at relatively low doses, yet can still display potentially useful characteristics in pharmacology if the dosage is low enough—e.g. atropine, which is the poison found in *Atropa Belladonna* (Deadly Nightshade) [299], is also on the World Health Organization's list of essential medicines for a basic

health system [300]. There have been many methods for determining glycoalkaloids reported in the literature including gas chromatography, thin layer chromatography, enzyme-linked immunosorbent assay, capillary electrophoresis, and MALDI-TOF MS. But the one method most used is HPLC [301]. Below is a brief summary of a typical HPLC assay for testing glycoalkaloid content in either the extracted starch or protein. Potato glycoalkaloids can be extracted using dilute acetic acid and sodium sulphite, the powdered protein is homogenised in this solution for 2 min, and the solid residue removed via centrifugation. The solution is then purified using solid phase extraction; HPLC analysis can then be carried out and using external standards, the concentration of both α -solanine and α -chaconine can be obtained [301].

5.2 Citrus Fruits

Another significant case study in the use of a combined biorefinery is on citrus fruits, which includes oranges, lemons, limes, grapefruits, and tangerines. In 2013–2014 the major citrus producing countries, such as Brazil, China, India, US, EU-27, Mexico, Egypt, Turkey, and South Africa, produced around 140 million MT of these fruits, of which 60% were oranges [137]. Worldwide figures estimate that over 30% of citrus fruit produced (40% in the case of oranges) is processed by the food industry each year, as opposed to going directly to retail. This processing, including juicing and canning, generates large quantities of citrus peel waste (19 million tonnes annually). On top of this, and even though the harvesting season is fixed in specific locations worldwide [302], citrus fruits are grown and harvested around the globe on either side of the equator throughout the year, ensuring a constant supply of citrus peel waste that has the potential to be used as a bio-refinery raw material for valorisation purposes.

Citrus peel waste accounts for 50% of the whole fruit [303] and contains up to 80% water [304, 305]. It has been recognised as an interesting source of dietary fibre, natural antioxidants, food colorants, and flavours and is of particular interest given the variety of compounds it contains. Major components of dry citrus peel waste are cellulose (up to 37%), pectin (up to 23%), sugars (up to 23%, including glucose, fructose, sucrose, and xylose; dry weight basis), and up to 11% hemicellulose [304]. Other components also present in dry citrus peel include lignin (up to 10%) [305], flavonoids (up to 4.5%), and up to 4% of essential oil [306], mainly composed of α -limonene and often referred as citrus essential oil.

Amongst these compounds, α -limonene and pectin are the most attractive for industrial production, but the recovery of other compounds such as flavonoids and sugars are nowadays gaining importance for the reasons outlined previously. The production of α -limonene from waste citrus peel normally takes place after the essential oil extraction by traditional methods like cold pressing or steam distillation once the juicing process has finished [303, 307, 308]. The two different processes yield respectively a high purity/food grade and a technical grade of α -limonene as the latest involves the use of lime as a dewatering agent [305], hence limiting the

final cellulosic-based end product to toxic cattle feed supplement [309]. On the other hand, pectin is traditionally extracted by acidic hydrolysis once the juice extraction process has concluded, generating quantities of acidic waste water [310, 311]. Still, this is not generally a by-product of the juice production industry as the inclusion of these extraction steps highly depends on the level capital available for investment, the required pay-back period and the juicing equipment used [312]. Moreover, the several washing and purification stages also involved make pectin production a wasteful and polluting process (particularly if the precipitation of pectin uses aluminium salts).

These conventional methods show some disadvantages related to high energy costs and long extraction times, and, according to the literature, the overall juicing process is becoming unprofitable and ineffective and would benefit from further improvements as current citrus waste processing is based upon processing technology that is at least 70 years old [309]. Scientists have, therefore, been developing greener and more efficient methodologies to be used in alternative biorefinery concepts to (1) increase production efficiency and (2) contribute to environmental preservation.

Clark et al. have recently developed a new biorefinery concept to combine all these extraction methods in an integrated process to be applied at industrial scale with the intention to bring together various new technologies [313]. As mentioned previously, conventional techniques tend to require hazardous solvents or additives to carry out a successful extraction of products from citrus peel waste. Thus, a methodology to produce a wide range of marketable products and relying on green solvents and techniques and able to cope with wet feedstock would be advantageous. Here lies the advantage of the microwave protocol compared to other techniques. Recently, microwave technology has gained increased industrial interest in the food sector since it (1) can be applied directly to the desired biomass without any need of solvent or pre-treatment (i.e. drying); (2) allows a rapid and homogeneous heating; and (3) is adaptable for continuous processes and easily scalable [314]. This is a key factor for future industrial scale applications given the importance of citrus peel drying costs. The scalability of this technology has been proved in different studies and has shown important advantages over traditional methods [315]. These features allow microwave technology be applied to different systems in order to obtain more flexible processes, leading to lower energy consumption and environmental impact [316].

Microwave heating has been previously used as a faster, more efficient and cost effective alternative for the extraction of higher quality D-limonene [317, 318] and pectin [319–321] from citrus peel waste. However, most of these individual methods still involve the use of additives and/or additional pre-treatment steps.

The methodology developed by Clark et al. [313] shows that it is possible to treat fresh waste orange peel (WOP) through three steps without involving additional chemicals for subsequent extraction: (1) D-limonene using microwave energy, (2) sugars and flavonoids after washing the residual citrus peel with hot ethanol, and (3) pectin following a pressurised microwave extraction under acid-free conditions, finally to end up with a cellulose-based solid material, and resulting in an innovative zero-waste biorefinery concept.

5.3 Bio-Boards

Coming from the other angle, the final case study presented gives an example of where the differently processed parts of several biowastes are brought together to make a finished product. MDF and particle boards are very highly used in furniture construction—the UK is estimated to produce over three million tonnes annually [137]. The process typically involves using chipped wood or other lingo-cellulosic substance being pressed or moulded into panels and bound together in place with urea–formaldehyde as a binder. The current issues associated with this process are:

1. Competition for virgin wood for other purposes coupled with the need to preserve forests.
2. Petroleum is the current source for urea–formaldehyde.
3. Formaldehyde is currently listed as a “probable carcinogen” and is continually emitted from the boards through their lifespan [322].

A joint project between the Universities of Bangor and York, as well as several private companies investigated using waste wheat straw as an alternative raw material for particleboards and manufacturing them in a greener manner. First, the wheat straw is de-waxed, with one portion of the straw going for biomass burning for renewable energy and the other directly to make the boards. Potential applications for the waxes include a variety of coatings, plasticisers, and cosmetic bases amongst others [323–326]. Meanwhile, the ashes from the biomass burning then have the silicates extracted with sodium- or potassium-based alkali solutions [327, 328]. The resulting silica solutions can then subsequently be used as the binder for the wheat straw alongside either whey protein or glycerol with the resulting boards pressed in the same manner as conventional particleboard [329]. The resulting boards have been assessed to meet all EN criteria and now produced at scale [330]. With the wax extracted for various purposes and the wheat straw used either directly in the board itself or via the power station as ash, this strategy represents full usage of wheat straw in a biorefinery concept. In addition, it demonstrates the “big picture” of biorefineries by integrating products resulting from the biorefinery of other biowastes, e.g. whey protein from dairy effluent or glycerol from biodiesel/soap production. The process is summarised in Fig. 26.

6 Concluding Remarks

Overall, the prospects for using waste biomass from existing industrial processes—notably food production—as the source for many of our materials is becoming increasingly close to realisation. Sugars and other carbohydrates are arguably the easiest and most versatile of the three main biological macromolecules due to their relative similarity in structure (allowing for more broad-stroke techniques) and the fact that they are already used a feedstock for bacterial cultures for many existing fermentation processes. The range of molecules produced includes platform

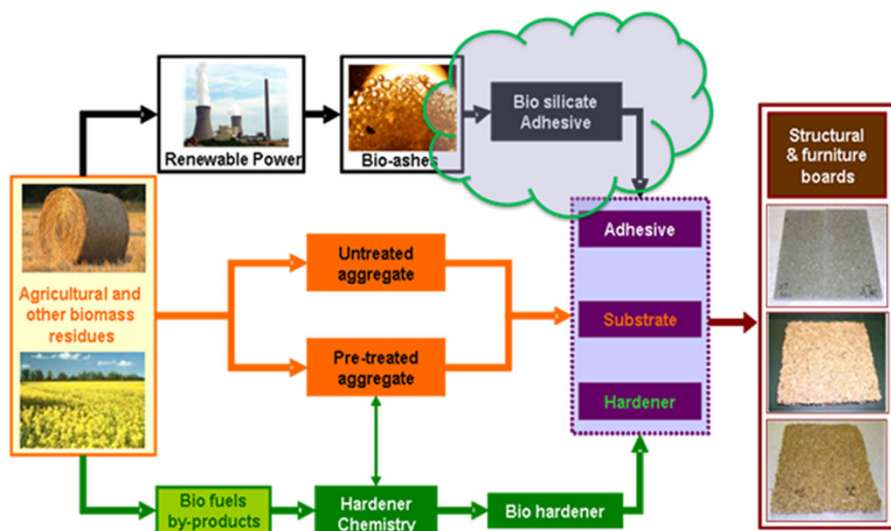


Fig. 26 The schematic overview of the production of bio-boards [330]

molecules for the production of materials, monomers capable of polymerisation directly to materials and solvents used for the processing stages.

Lipids present less versatility, but again their similarity in structure allows for the application of a number of broad-stroke techniques and their hydrophobicity makes them useful as replacements for a number of crude oil applications such as surfactants, lubricants, waxes, and polymers.

Proteins represent a class of materials in their own right due to the structures and functions they provide in biological systems. However, because of this they are by far the most diverse of the three macromolecules and are arguably the hardest to develop a processing method for due to the lack of broad-brush techniques available to carbohydrates and lipids. Extraction, in particular, is a major barrier to overcome in order to achieve processing to green materials. However, there are a number of promising developments in this field and their diversity represents significant promise for versatility in the range of materials that could arise from the biorefinery concept.

The case studies presented highlight the ability to utilise all parts of biomass sequentially in the biorefinery concept as well potential for different fractions to come together when producing new materials. They also illustrate that the minor components of biomass, such as vitamins and minerals, are also important when considering refining biomass, as they also represent the potential to be feedstocks for niche applications.

Open Access This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

References

1. Brundtland G et al. (1987) Our common future ('brundtland report')
2. OECD, Material Resources, Productivity and the Environment. OECD Publishing
3. O'Sullivan A, Sheffrin SM, Perez SJ (2008) Urban economics, 8th edn. Pearson Education, Upper Saddle River
4. I.S. Analysis (2015) (ed) What are the products and uses of petroleum?
5. Rübberdt K (2012) New natural resource base in the chemical industry—only a matter of time. Achema
6. Wauquier JP (1995) Petroleum refining: crude oil, petroleum products, process flowsheets, vol 1. Editions Technip, Paris
7. Sherwood J (2016) Sustainable Solvent Selection Service. In BASA Technical Forum. University of York
8. Pepper AS, Corvi PJ (1995) Simple kinetic models of petroleum formation. Part I: oil and gas generation from kerogen. *Mar Petrol Geol* 12(3):291–319
9. Pepper AS, Corvi PJ (1995) Simple kinetic models of petroleum formation. Part III: Modelling an open system. *Mar Petrol Geol* 12(4):417–452
10. Pepper AS, Dodd TA (1995) Simple kinetic models of petroleum formation. Part II: oil-gas cracking. *Mar Pet Geol* 12(3):321–340
11. Tissot BP, Welte DH (2013) Petroleum formation and occurrence. Springer Science & Business Media, New York
12. Administration. U.S.E.I. (2016) World Crude Oil Consumption by Year. United States Energy Information Administration: Indexmundi
13. Owen NA, Inderwildi OR, King DA (2010) The status of conventional world oil reserves—Hype or cause for concern? *Energy Policy* 38(8):4743–4749
14. Haider GM (2000) World oil reserves: problems in definition and estimation. *OPEC Rev* 24(4):305–327
15. Alekkett K (2007) Peak oil and the evolving strategies of oil importing and exporting countries. OECD Publishing, Paris
16. de Almeida P, Silva PD (2009) The peak of oil production-timings and market recognition. *Energy Policy* 37(4):1267–1276
17. Bakhtiari AS (2004) World oil production capacity model suggests output peak by 2006-07. *Oil Gas J* 102(16):18–19
18. Robelius F (2007) Giant oil fields-the highway to oil: Glant oil fields and their importance for future oil production
19. Campbell CJ, Laherrère JH (1998) The end of cheap oil. *Sci Am* 278(3):60–65
20. McGlade C, Ekins P (2015) The geographical distribution of fossil fuels unused when limiting global warming to 2 [deg] C. *Nature* 517(7533):187–190
21. Kingston PF (2002) Long-term environmental impact of oil spills. *Spill Sci Technol Bull* 7(1–2):53–61
22. Regulation E (1999) No 1907/2006 of the European Parliament and of the Council of 18 December 2006, concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH), establishing a European Chemicals Agency, amending Directive. 45: 1–849
23. Cherubini F (2010) The biorefinery concept: using biomass instead of oil for producing energy and chemicals. *Energy Convers Manage* 51(7):1412–1421
24. Fernando S et al (2006) Biorefineries: current status, challenges, and future direction. *Energy Fuels* 20(4):1727–1737
25. Naik SN et al (2010) Production of first and second generation biofuels: a comprehensive review. *Renew Sustain Energy Rev* 14(2):578–597
26. Kamm B, Kamm M (2004) Principles of biorefineries. *Appl Microbiol Biotechnol* 64(2):137–145
27. McCormick K, Kautto N (2013) The bioeconomy in Europe: an overview. *Sustainability* 5(6):2589–2608
28. Ma F, Hanna MA (1999) Biodiesel production: a review. *Bioresour Technol* 70(1):1–15
29. Pousa GPAG, Santos ALF, Suarez PAZ (2007) History and policy of biodiesel in Brazil. *Energy Policy* 35(11):5393–5398
30. Radich A (1998) Biodiesel performance, costs, and use. *Combustion* 24(2):131–132

31. Encinar JM et al (1999) Preparation and properties of biodiesel from *Cynara cardunculus* L. oil. Ind Eng Chem Res 38(8):2927–2931
32. Dvořák R, Skopal F, Komers K (2001) Transesterification of rapeseed oil in a feedback reactor. Eur J Lipid Sci Technol 103(11):742–745
33. Srivastava A, Prasad R (2000) Triglycerides-based diesel fuels. Renew Sustain Energy Rev 4(2):111–133
34. Srinivasan S (2009) The food v. fuel debate: A nuanced view of incentive structures. Renew Energy 34(4):950–954
35. Liaquat AM et al (2013) Impact of palm biodiesel blend on injector deposit formation. Appl Energy 111:882–893
36. Baitiang T et al (2008) Effects of biodiesel and *Jatropha* oil on performance, black smoke and durability of single-cylinder diesel engine. J Metals Mater Miner 18(2):181–185
37. Fazal MA, Haseeb ASMA, Masjuki HH (2011) Biodiesel feasibility study: An evaluation of material compatibility; performance; emission and engine durability. Renew Sustain Energy Rev 15(2):1314–1324
38. Haşimoğlu C et al (2008) Performance characteristics of a low heat rejection diesel engine operating with biodiesel. Renew Energy 33(7):1709–1715
39. Maleque MA, Masjuki HH, Haseeb ASMA (2000) Effect of mechanical factors on tribological properties of palm oil methyl ester blended lubricant. Wear 239(1):117–125
40. Thornton MJ et al (2009) Impacts of biodiesel fuel blends oil dilution on light-duty diesel engine operation. SAE Int J Fuels Lubr 2(2009-01-1790):781–788
41. Rakopoulos C et al (2006) Comparative performance and emissions study of a direct injection diesel engine using blends of diesel fuel with vegetable oils or bio-diesels of various origins. Energy Convers Manage 47(18):3272–3287
42. Dugmore TIJ, Stark MS (2014) Effect of biodiesel on the autoxidation of lubricant base fluids. Fuel 124:91–96
43. Dunn RO (2009) Effects of minor constituents on cold flow properties and performance of bio-diesel. Prog Energy Combust Sci 35(6):481–489
44. Dwivedi G, Sharma MP (2014) Impact of cold flow properties of biodiesel on engine performance. Renew Sustain Energy Rev 31:650–656
45. Resolution A RES/70/1 (2015) Transforming our world: the 2030 Agenda for Sustainable Development. Seventieth session United Nations General Assembly, New York. 25
46. Anastas PT, Warner JC (2000) Green chemistry: theory and practice. Oxford University Press, Oxford
47. Commission E-E (2008) Directive 2008/98/EC of the European Parliament and of the Council of 19 November 2008 on waste. Off J Eur Union L 312(13):22–111
48. Sims REH, Rogner H-H, Gregory K (2003) Carbon emission and mitigation cost comparisons between fossil fuel, nuclear and renewable energy resources for electricity generation. Energy Policy 31(13):1315–1326
49. Akiyama M, Tsuge T, Doi Y (2003) Environmental life cycle comparison of polyhydroxyalkanoates produced from renewable carbon resources by bacterial fermentation. Polym Degrad Stab 80(1):183–194
50. Mussatto SI et al (2011) Production, composition, and application of coffee and its industrial residues. Food Bioprocess Technol 4(5):661–672
51. Murthy PS, Naidu MM (2012) Sustainable management of coffee industry by-products and value addition—a review. Resour Conserv Recycl 66:45–58
52. Esquivel P, Jiménez VM (2012) Functional properties of coffee and coffee by-products. Food Res Int 46(2):488–495
53. Gans JH et al (1980) Effects of short-term and long-term theobromine administration to male dogs. Toxicol Appl Pharmacol 53(3):481–496
54. Jenkins RW et al (2014) Effect of the type of bean, processing, and geographical location on the biodiesel produced from waste coffee grounds. Energy Fuels 28(2):1166–1174
55. Abdullah M, Koc AB (2013) Oil removal from waste coffee grounds using two-phase solvent extraction enhanced with ultrasonication. Renew Energy 50:965–970
56. Kondamudi N, Mohapatra SK, Misra M (2008) Spent coffee grounds as a versatile source of green energy. J Agric Food Chem 56(24):11757–11760
57. Caetano NS, Silva VF, Mata TM (2012) Valorization of coffee grounds for biodiesel production. Chem Eng Trans 26:267–272

58. Caetano NS et al (2014) Spent coffee grounds for biodiesel production and other applications. *Clean Technol Environ Policy* 16(7):1423–1430
59. E. Agency, Editor (2015) Environmental permit application advertisement. PE28 4WX, Bio-Bean Limited
60. Ayerza R (1995) Oil content and fatty acid composition of chia (*Salvia hispanica* L.) from five northwestern locations in Argentina. *J Am Oil Chem Soc* 72(9):1079–1081
61. Lofland HB, Quackenbush FW, Brunson AM (1954) Distribution of fatty acids in corn oil. *J Am Oil Chem Soc* 31(10):412–414
62. Bauman LF, Conway TF, Watson SA (1963) Heritability of variations in oil content of individual corn kernels. *Science* 139(3554):498–499
63. Zimmerman DC (1962) The relationship between seed density and oil content in flax. *J Am Oil Chem Soc* 39(2):77–78
64. Lavee S, Wodner M (2004) The effect of yield, harvest time and fruit size on the oil content in fruits of irrigated olive trees (*Olea europaea*), cvs. Barnea and Manzanillo. *Sci Hortic* 99(3–4):267–277
65. Velasco L, Möllers C, Becker HC (1999) Estimation of seed weight, oil content and fatty acid composition in intact single seeds of rapeseed (*Brassica napus* L.) by near-infrared reflectance spectroscopy. *Euphytica* 106(1):79–85
66. Madsen E (1976) Nuclear magnetic resonance spectrometry as a quick method of determination of oil content in rapeseed. *J Am Oil Chem Soc* 53(7):467–469
67. Zhao J et al (2005) Oil content in a European × Chinese rapeseed population. *Crop Sci* 45(1):51–59
68. Diers BW et al (1992) RFLP analysis of soybean seed protein and oil content. *Theor Appl Genet* 83(5):608–612
69. Hwang E-Y et al (2014) A genome-wide association study of seed protein and oil content in soybean. *BMC Genom* 15(1):1–12
70. Robertson JA, Morrison WH (1979) Analysis of oil content of sunflower seed by wide-line NMR. *J Am Oil Chem Soc* 56(12):961–964
71. Pérez-Vich B, Velasco L, Fernández-Martínez JM (1998) Determination of seed oil content and fatty acid composition in sunflower through the analysis of intact seeds, husked seeds, meal and oil by near-infrared reflectance spectroscopy. *J Am Oil Chem Soc* 75(5):547–555
72. Limousy L et al (2013) Gaseous products and particulate matter emissions of biomass residential boiler fired with spent coffee grounds pellets. *Fuel* 107:323–329
73. Silva MA et al (1998) The use of biomass residues in the Brazilian soluble coffee industry. *Biomass Bioenergy* 14(5–6):457–467
74. Tokimoto T et al (2005) Removal of lead ions in drinking water by coffee grounds as vegetable biomass. *J Colloid Interface Sci* 281(1):56–61
75. Safarik I et al (2012) Magnetically modified spent coffee grounds for dyes removal. *Eur Food Res Technol* 234(2):345–350
76. Franca AS, Oliveira LS, Ferreira ME (2009) Kinetics and equilibrium studies of methylene blue adsorption by spent coffee grounds. *Desalination* 249(1):267–272
77. Plaza MG et al (2012) Valorisation of spent coffee grounds as CO₂ adsorbents for postcombustion capture applications. *Appl Energy* 99:272–279
78. Páscoa RNMJ, Magalhães LM, Lopes JA (2013) FT-NIR spectroscopy as a tool for valorization of spent coffee grounds: application to assessment of antioxidant properties. *Food Res Int* 51(2):579–586
79. Yen W-J et al (2005) Antioxidant properties of roasted coffee residues. *J Agric Food Chem* 53(7):2658–2663
80. Murthy PS, Naidu MM (2012) Recovery of phenolic antioxidants and functional compounds from coffee industry by-products. *Food Bioprocess Technol* 5(3):897–903
81. Pinelo M et al (2007) Effect of cellulases, solvent type and particle size distribution on the extraction of chlorogenic acid and other phenols from spent coffee grounds. *Am J Food Technol* 2:641–651
82. Crozier A et al (2015) In vitro studies on the stability in the proximal gastrointestinal tract and bioaccessibility in Caco-2 cells of chlorogenic acids from spent coffee grounds. *Int J Food Sci Nutr* 66(6):657–664
83. Conde T, Mussatto SI (2015) Isolation of polyphenols from spent coffee grounds and silverskin by mild hydrothermal pretreatment. *Prep Biochem Biotechnol* (just-accepted)
84. Leifa F, Pandey A, Soccol CR (2001) Production of *Flammulina velutipes* on coffee husk and coffee spent-ground. *Braz Arch Biol Technol* 44(2):205–212

85. Machado EMS et al (2012) Growth of fungal strains on coffee industry residues with removal of polyphenolic compounds. *Biochem Eng J* 60:87–90
86. Backlund I et al (2014) Extractive profiles of different lodgepole pine (*Pinus contorta*) fractions grown under a direct seeding-based silvicultural regime. *Ind Crops Prod* 58:220–229
87. Lay J-J, Lee Y-J, Noike T (1999) Feasibility of biological hydrogen production from organic fraction of municipal solid waste. *Water Res* 33(11):2579–2586
88. Dyson B, Chang N-B (2005) Forecasting municipal solid waste generation in a fast-growing urban region with system dynamics modeling. *Waste Manage* 25(7):669–679
89. Matthew Hancock DR (2015) Building a high value bioeconomy. HM Government
90. Science and T, Committee (2011) House of Lords-Science and Technology Select Committee 2nd Report of Session 2010–12–Behaviour Change. House of Lords Paper. 179
91. FACT SHEET (2016) Overview of USDA's BioPreferred Program: United States Department of Agriculture
92. Commission proposes strategy for sustainable bioeconomy in Europe (2012) European Commission
93. Johnson E (2009) Goodbye to carbon neutral: getting biomass footprints right. *Environ Impact Assess Rev* 29(3):165–168
94. Melillo JM et al (2009) Indirect emissions from biofuels: how important? *Science* 326(5958):1397–1399
95. Searchinger T et al (2008) Use of U.S. croplands for biofuels increases greenhouse gases through emissions from land-use change. *Science* 319(5867):1238–1240
96. Rings S-M (1980) Conformational nomenclature for five and six-membered ring forms of monosaccharides and their derivatives. *Eur J Biochem* 100:295–298
97. Apprich S et al (2014) Wheat bran-based biorefinery 2: valorization of products. *LWT Food Sci Technol* 56(2):222–231
98. Lin Y, Tanaka S (2006) Ethanol fermentation from biomass resources: current state and prospects. *Appl Microbiol Biotechnol* 69(6):627–642
99. Hornsey IS (2003) A history of beer and brewing. vol. 34. Royal Society of Chemistry
100. Barnett JA (2003) A history of research on yeasts 5: the fermentation pathway. *Yeast* 20(6):509–543
101. John RP, Nampoothiri KM, Pandey A (2007) Fermentative production of lactic acid from biomass: an overview on process developments and future perspectives. *Appl Microbiol Biotechnol* 74(3):524–534
102. Fu Y-Q et al (2016) High-efficiency *L*-lactic acid production by *Rhizopus oryzae* using a novel modified one-step fermentation strategy. *Bioresour Technol* 218:410–417
103. Kars G, Alparslan Ü (2013) Valorization of sugar beet molasses for the production of biohydrogen and 5-aminolevulinic acid by *Rhodobacter sphaeroides* O.U.001 in a biorefinery concept. *Int J Hydrogen Energy* 38(34):14488–14494
104. Luedeking R, Piret EL (1959) A kinetic study of the lactic acid fermentation. Batch process at controlled pH. *J Biochem Microbiol Technol Eng* 1(4):393–412
105. Linko YY, Javanainen P (1996) Simultaneous liquefaction, saccharification, and lactic acid fermentation on barley starch. *Enzym Microb Technol* 19(2):118–123
106. Drumright RE, Gruber PR, Henton DE (2000) Polylactic acid technology. *Adv Mater* 12(23):1841–1846
107. Zeikus JG, Jain MK, Elankovan P (1999) Biotechnology of succinic acid production and markets for derived industrial products. *Appl Microbiol Biotechnol* 51(5):545–552
108. Werpy T et al. (2004) Top value added chemicals from biomass. Volume 1-Results of screening for potential candidates from sugars and synthesis gas. DTIC Document
109. Dunlop AP, Wells JPA (1957) Process for producing levulinic acid. Google Patents
110. Alipour S, Omidvarborna H (2017) Enzymatic and catalytic hybrid method for levulinic acid synthesis from biomass sugars. *J Clean Prod* 143:490–496
111. Alarco P-J et al (2004) The plastic-crystalline phase of succinonitrile as a universal matrix for solid-state ionic conductors. *Nat Mater* 3(7):476–481
112. Lin CS et al (2012) Wheat-based biorefining strategy for fermentative production and chemical transformations of succinic acid. *Biofuels Bioprod Biorefin* 6(1):88–104
113. Luque R, Clark JH (2010) Water-tolerant Ru-Starbon® materials for the hydrogenation of organic acids in aqueous ethanol. *Catal Commun* 11(10):928–931
114. Luque R et al (2009) Efficient aqueous hydrogenation of biomass platform molecules using supported metal nanoparticles on Starbons®. *Chem Commun* 35:5305–5307

115. Bhattacharyya A, Manila MD (2011) Catalysts for maleic acid hydrogenation to 1,4-butanediol. Google Patents
116. Fabian L et al (2014) Efficient microwave-assisted esterification reaction employing methanesulfonic acid supported on alumina as catalyst. *Synth Commun* 44(16):2386–2392
117. Stensrud K, Venkatasubramanian P (2013) Hydrogenation products from biologically-derived carboxylic-acid esters. Google Patents
118. Emmet RE, Francis DAG (1938) Preparation of amides. Google Patents
119. Jacquot R, Marion P (2015) Method for manufacturing compounds including nitrile functions. Google Patents
120. Bechthold I et al (2008) Succinic acid: a new platform chemical for biobased polymers from renewable resources. *Chem Eng Technol* 31(5):647–654
121. Delhomme C, Weuster-Botz D, Kühn FE (2009) Succinic acid from renewable resources as a C 4 building-block chemical—a review of the catalytic possibilities in aqueous media. *Green Chem* 11(1):13–26
122. Farmer TJ et al (2015) Synthesis of unsaturated polyester resins from various bio-derived platform molecules. *Int J Mol Sci* 16(7):14912–14932
123. Farmer T et al (2016) Post-polymerisation modification of bio-derived unsaturated polyester resins via Michael additions of 1,3-dicarbonyls. *Polym Chem* 7(8):1650–1658
124. Steinbuechel A, Doi Y (2002) Polyesters III—applications and commercial products. *Biopolymers*, vol 398. Wiley-VCH, Weinheim
125. Mhemdi H et al (2014) Alternative pressing/ultrafiltration process for sugar beet valorization: impact of pulsed electric field and cossettes preheating on the qualitative characteristics of juices. *Food Bioprocess Technol* 7(3):795–805
126. Kootstra AMJ, Beeftink HH, Sanders JPM (2011) Valorisation of *Jatropha curcas*: solubilisation of proteins and sugars from the NaOH extracted de-oiled press cake. *Ind Crops Prod* 34(1):972–978
127. Nair NR et al (2016) Simultaneous saccharification and fermentation (SSF) of jackfruit seed powder (JFSP) to *L*-lactic acid and to polylactide polymer. *Bioresour Technol* 213:283–288
128. Hu J et al (2016) High-titer lactic acid production by *Lactobacillus pentosus* FL0421 from corn stover using fed-batch simultaneous saccharification and fermentation. *Bioresour Technol* 214:74–80
129. Yang X et al (2015) Valorisation of mixed bakery waste in non-sterilized fermentation for *L*-lactic acid production by an evolved *Thermoanaerobacterium* sp. strain. *Biores Technol* 198:47–54
130. Wang Y et al (2016) The optimization of *L*-lactic acid production from sweet sorghum juice by mixed fermentation of *Bacillus coagulans* and *Lactobacillus rhamnosus* under unsterile conditions. *Bioresour Technol* 218:1098–1105
131. Kwan TH, Hu Y, Lin CSK (2016) Valorisation of food waste via fungal hydrolysis and lactic acid fermentation with *Lactobacillus casei* Shirota. *Bioresour Technol* 217:129–136
132. Zhang AYZ et al (2013) Valorisation of bakery waste for succinic acid production. *Green Chem* 15(3):690–695
133. Liu Y-P et al (2008) Economical succinic acid production from cane molasses by *Actinobacillus succinogenes*. *Bioresour Technol* 99(6):1736–1742
134. Kim DY et al (2004) Batch and continuous fermentation of succinic acid from wood hydrolysate by *Mannheimia succiniciproducens* MBEL55E. *Enzym Microb Technol* 35(6–7):648–653
135. Li Q et al (2010) Efficient conversion of crop stalk wastes into succinic acid production by *Actinobacillus succinogenes*. *Bioresour Technol* 101(9):3292–3294
136. Agency FS, I.o.F Research, PH England (2014) McCance and Widdowson's the composition of foods. Royal Society of Chemistry
137. FAOSTAT (2016) Food and Agricultural Organisation of the United Nations
138. White RJ, Budarin VL, Clark JH (2008) Tuneable Mesoporous Materials from α -D-Polysaccharides. *ChemSuschem* 1(5):408–411
139. Ozel MZ, Gogus F, Lewis AC (2003) Subcritical water extraction of essential oils from *Thymbra spicata*. *Food Chem* 82(3):381–386
140. Zhang Z et al (2014) Chemical modification of starch and the application of expanded starch and its esters in hot melt adhesive. *RSC Adv* 4(79):41947–41955
141. Shuttleworth PS, Budarin V, Clark JH (2009) Green power—"molten" starch adhesives. *J Mater Chem* 19(45):8589–8593
142. Shuttleworth PS et al (2010) Switchable adhesives for carpet tiles: a major breakthrough in sustainable flooring. *Green Chem* 12(5):798–803

143. Budarin V et al. (2007) Mesoporous carbonaceous materials, preparation and use thereof. Google Patents
144. Budarin V et al. (2008) Carbonaceous materials. Google Patents
145. Budarin V et al. (2014) Carbonaceous materials. Google Patents
146. Budarin V et al (2006) Starbons: new starch-derived mesoporous carbonaceous materials with tunable properties. *Angew Chem* 118(23):3866–3870
147. Budarin V et al (2009) Starbons: cooking up nanostructured mesoporous materials. *Mater Matters* 4(1):19–22 (Milwaukee, WI, US)
148. Shuttleworth P et al (2011) Starbon®: preparation, applications and transition from laboratory curiosity to scalable product. *NSTI Nanotech* 3
149. Budarin VL et al (2015) Chapter 2: From polysaccharides to Starbons®. In: *Porous carbon materials from sustainable precursors*, pp 53–81. The Royal Society of Chemistry
150. Luque R et al (2012) A new star (ch) is born: Starbons® as biomass-derived mesoporous carbonaceous materials
151. McCusker L, Liebau F, Engelhardt G (2001) Nomenclature of structural and compositional characteristics of ordered microporous and mesoporous materials with inorganic hosts (IUPAC Recommendations 2001). *Pure Appl Chem* 73(2):381–394
152. Hsieh C-T, Teng H (2000) Influence of mesopore volume and adsorbate size on adsorption capacities of activated carbons in aqueous solutions. *Carbon* 38(6):863–869
153. Parker HL et al (2013) Use of starbon for the adsorption and desorption of phenols. *ACS Sustain Chem Eng* 1(10):1311–1318
154. Daifullah AAM, Girgis BS (1998) Removal of some substituted phenols by activated carbon obtained from agricultural waste. *Water Res* 32(4):1169–1177
155. Anirudhan TS, Sreekumari SS, Bringle CD (2009) Removal of phenols from water and petroleum industry refinery effluents by activated carbon obtained from coconut coir pith. *Adsorption* 15(5):439–451
156. Rhodes C (2008) Short on reserves: the planet's metal reserves could be running out sooner than we think. We need to start recycling them urgently. *Chem Ind* 16:21–23
157. Dodson JR et al (2012) Elemental sustainability: towards the total recovery of scarce metals. *Chem Eng Process* 51:69–78
158. Tony MA, Parker HL, Clark JH (2016) Treatment of laundrette wastewater using Starbon and Fenton's reagent. *J Environ Sci Health Part A* 51:1–6
159. Colmenares JC, Lisowski P, Łomot D (2013) A novel biomass-based support (Starbon) for TiO₂ hybrid photocatalysts: a versatile green tool for water purification. *RSC Adv* 3(43):20186–20192
160. Ojeda M et al (2013) Simple preparation of novel metal-containing mesoporous starches. *Materials* 6(5):1891–1902
161. Budarin V et al (2007) Towards a bio-based industry: benign catalytic esterifications of succinic acid in the presence of water. *Chem Eur J* 13(24):6914–6919
162. Clark JH et al (2008) Catalytic performance of carbonaceous materials in the esterification of succinic acid. *Catal Commun* 9(8):1709–1714
163. Budarin VL et al (2007) Tunable mesoporous materials optimised for aqueous phase esterifications. *Green Chem* 9(9):992–995
164. Budarin VL et al (2007) Versatile mesoporous carbonaceous materials for acid catalysis. *Chem Commun* 6:634–636
165. Mena-Durán Cinthia J, Macquarrie Duncan J (2014) Esterification of lauric acid with methanol using sulfonated Starbons. *Res J Chem Environ* 18:8
166. Luque R et al (2011) Starbon® acids in alkylation and acetylation reactions: effect of the Brønsted–Lewis acidity. *Catal Commun* 12(15):1471–1476
167. Mesquita LM et al (2015) Starbon® 400-HSO 3: a green mesoporous carbonaceous solid acid catalyst for the Ritter reaction. *Catal Commun* 69:170–173
168. Marriott AS et al (2014) A natural template approach to mesoporous carbon spheres for use as green chromatographic stationary phases. *RSC Adv* 4(1):222–228
169. Zhang Z et al (2015) Green materials: adhesive properties of bio-oils derived from various biorenewable waste streams: from wood to paper to paper deinking residue. *ACS Sustain Chem Eng* 3(11):2985–2993
170. Zhang Z et al (2015) Simultaneous recovery of organic and inorganic content of paper deinking residue through low-temperature microwave-assisted pyrolysis. *Environ Sci Technol* 49(4):2398–2404

171. Zhang Z et al (2015) Low-temperature microwave-assisted pyrolysis of waste office paper and the application of bio-oil as an Al adhesive. *Green Chem* 17(1):260–270
172. Robert T, Velder J, Schmalz HG (2008) Enantioselective Cu-catalyzed 1,4-addition of Grignard Reagents to cyclohexenone using taddol-derived phosphine-phosphite ligands and 2-methyl-THF as a solvent. *Angew Chem* 120(40):7832–7835
173. Daniel R et al (2011) Effect of spark timing and load on a DISI engine fuelled with 2,5-dimethylfuran. *Fuel* 90(2):449–458
174. Marisa C et al (2010) Production of 5-hydroxy-4-keto-2-pentenoic acid by photo-oxidation of 5-hydroxymethylfurfural with singlet oxygen: a kinetic investigation. *J Photochem Photobiol A* 210(1):69–76
175. Rosatella AA et al (2011) 5-Hydroxymethylfurfural (HMF) as a building block platform: biological properties, synthesis and synthetic applications. *Green Chem* 13(4):754–793
176. Papageorgiou GZ et al (2016) Production of bio-based 2,5-furan dicarboxylate polyesters: recent progress and critical aspects in their synthesis and thermal properties. *Eur Polym J* 83:202–229
177. FDCA (2016) Avantium looks towards Asia to market its innovative bioplastic. Focus on Catalysts 2016(2):3–4
178. Despax S et al (2014) Fast and efficient DMSO-mediated dehydration of carbohydrates into 5-hydroxymethylfurfural. *Catal Commun* 51:5–9
179. Agirrezabal-Telleria I, Gandarias I, Arias PL (2014) Heterogeneous acid-catalysts for the production of furan-derived compounds (furfural and hydroxymethylfurfural) from renewable carbohydrates: a review. *Catal Today* 234:42–58
180. Karinen R, Vilonen K, Niemelä M (2011) Biorefining: heterogeneously catalyzed reactions of carbohydrates for the production of furfural and hydroxymethylfurfural. *Chemsuschem* 4(8):1002–1016
181. Mascal M, Nikitin EB (2009) Dramatic advancements in the saccharide to 5-(chloromethyl)furfural conversion reaction. *Chemsuschem* 2(9):859–861
182. Mascal M, Nikitin EB (2010) High-yield conversion of plant biomass into the key value-added feedstocks 5-(hydroxymethyl)furfural, levulinic acid, and levulinic esters via 5-(chloromethyl)furfural. *Green Chem* 12(3):370–373
183. Mascal M, Dutta S (2011) Synthesis of the natural herbicide [small delta]-aminolevulinic acid from cellulose-derived 5-(chloromethyl)furfural. *Green Chem* 13(1):40–41
184. Breeden S et al (2013) Microwave heating for rapid conversion of sugars and polysaccharides to 5-chloromethyl furfural. *Green Chem* 15(1):72–75
185. Kamlet MJ et al (1983) Linear solvation energy relationships. 23. A comprehensive collection of the solvatochromic parameters, π^* , α , and β , and some methods for simplifying the generalized solvatochromic equation. *J Org Chem* 48(17):2877–2887
186. Harholt J, Suttangkakul A, Scheller HV (2010) Biosynthesis of pectin. *Plant Physiol* 153(2):384–395
187. Christiaens S et al (2015) Pectin characterisation in vegetable waste streams: a starting point for waste valorisation in the food industry. *LWT Food Sci Technol* 61(2):275–282
188. Thakur BR et al (1997) Chemistry and uses of pectin—a review. *Crit Rev Food Sci Nutr* 37(1):47–73
189. Koubala B et al (2008) Effect of extraction conditions on some physicochemical characteristics of pectins from “Améliorée” and “Mango” mango peels. *Food Hydrocoll* 22(7):1345–1351
190. Sirisakulwat S et al (2010) Resistance of industrial mango peel waste to pectin degradation prior to by-product drying. *Int J Food Sci Technol* 45(8):1647–1658
191. Heuzé V et al. (2013) Mango (*Mangifera indica*) fruit and by-products, Feedipedia. org. a programme by INRA, CIRAD, AFZ and FAO
192. Koubala BB et al (2009) Rheological and high gelling properties of mango (*Mangifera indica*) and ambarella (*Spondias cytherea*) peel pectins. *Int J Food Sci Technol* 44(9):1809–1817
193. Bagherian H et al (2011) Comparisons between conventional, microwave-and ultrasound-assisted methods for extraction of pectin from grapefruit. *Chem Eng Process* 50(11):1237–1243
194. Yeoh S, Shi J, Langrish T (2008) Comparisons between different techniques for water-based extraction of pectin from orange peels. *Desalination* 218(1):229–237
195. Guo X et al (2012) Extraction of pectin from navel orange peel assisted by ultra-high pressure, microwave or traditional heating: a comparison. *Carbohydr Polym* 88(2):441–448

196. Matharu AS et al (2016) Acid-free microwave-assisted hydrothermal extraction of pectin and porous cellulose from mango peel waste—towards a zero waste mango biorefinery. *Green Chem* 18:5280–5287
197. Cooper GM, Hausman RE (2000) *The cell*. Sinauer Associates, Sunderland
198. ChemSec, SIN List
199. Pečar D, Doleček V (2003) Isothermal compressibilities and isobaric expansibilities of pentane, hexane, heptane and their binary and ternary mixtures from density measurements. *Fluid Phase Equilib* 211(1):109–127
200. Friedrich J, Pryde E (1984) Supercritical CO₂ extraction of lipid-bearing materials and characterization of the products. *J Am Oil Chem Soc* 61(2):223–228
201. Sczechowski J et al. Supercritical CO₂ extraction
202. Sin EHK (2012) *The extraction and fractionation of waxes from biomass*. University of York
203. Attard TM (2015) Supercritical CO₂ extraction of waxes as part of a holistic biorefinery. University of York
204. Bozan B, Temelli F (2002) Supercritical CO₂ extraction of flaxseed. *J Am Oil Chem Soc* 79(3):231–235
205. del Valle JM, Uquiche EL (2002) Particle size effects on supercritical CO₂ extraction of oil-containing seeds. *J Am Oil Chem Soc* 79(12):1261–1266
206. Reverchon E, Porta GD, Senatore F (1995) Supercritical CO₂ extraction and fractionation of lavender essential oil and waxes. *J Agric Food Chem* 43(6):1654–1658
207. Kuk M, Dowd M (1998) Supercritical CO₂ extraction of rice bran. *J Am Oil Chem Soc* 75(5):623–628
208. Asl AH, Khajenoori M (2013) Subcritical water extraction. *Mass Transfer-Advances in sustainable energy and environment oriented numerical modeling*. 459–487
209. Özel MZ et al (2005) Analysis of volatile components from *Ziziphora taurica* subsp. *taurica* by steam distillation, superheated-water extraction, and direct thermal desorption with GC × GC–TOFMS. *Anal Bioanal Chem* 382(1):115–119
210. Smith RM (2006) Superheated water: the ultimate green solvent for separation science. *Anal Bioanal Chem* 385(3):419–421
211. Özel MZ, Kaymaz H (2004) Superheated water extraction, steam distillation and Soxhlet extraction of essential oils of *Origanum onites*. *Anal Bioanal Chem* 379(7–8):1127–1133
212. Basile A, Jiménez-Carmona MM, Clifford AA (1998) Extraction of rosemary by superheated water. *J Agric Food Chem* 46(12):5205–5209
213. Kubátová A, Miller DJ, Hawthorne SB (2001) Comparison of subcritical water and organic solvents for extracting kava lactones from kava root. *J Chromatogr A* 923(1–2):187–194
214. Jimenez-Carmona M, Ubers J, De Castro ML (1999) Comparison of continuous subcritical water extraction and hydrodistillation of marjoram essential oil. *J Chromatogr A* 855(2):625–632
215. Do LD et al (2009) Environmentally friendly vegetable oil microemulsions using extended surfactants and linkers. *J Surfactants Deterg* 12(2):91–99
216. Attaphong C, Do L, Sabatini DA (2012) Vegetable oil-based microemulsions using carboxylate-based extended surfactants and their potential as an alternative renewable biofuel. *Fuel* 94:606–613
217. Mobarak HM et al (2014) The prospects of biolubricants as alternatives in automotive applications. *Renew Sustain Energy Rev* 33:34–43
218. Bokade VV, Yadav GD (2007) Synthesis of bio-diesel and bio-lubricant by transesterification of vegetable oil with lower and higher alcohols over heteropolyacids supported by clay (K-10). *Process Saf Environ Prot* 85(5):372–377
219. Salimon J, Salih N, Yousif E (2010) Biolubricants: raw materials, chemical modifications and environmental benefits. *Eur J Lipid Sci Technol* 112(5):519–530
220. Gardner HW (1989) Oxygen radical chemistry of polyunsaturated fatty acids. *Free Radic Biol Med* 7(1):65–86
221. McMillen DF, Golden DM (1982) Hydrocarbon bond dissociation energies. *Annu Rev Phys Chem* 33(1):493–532
222. Trenwith AB (1982) Dissociation of 3-methylpenta-1,4-diene and the resonance energy of the pentadienyl radical. *J Chem Soc Faraday Trans 1 Phys Chem Condens Phases* 78(10):3131–3136
223. Clark KB et al (1991) Studies of the formation and stability of pentadienyl and 3-substituted pentadienyl radicals. *J Org Chem* 56(19):5535–5539
224. Blanksby SJ, Ellison GB (2003) Bond dissociation energies of organic molecules. *Acc Chem Res* 36(4):255–263

225. Chan HW-S, Levett G, Matthew JA (1979) The mechanism of the rearrangement of linoleate hydroperoxides. *Chem Phys Lipid* 24(3):245–256
226. Filippova TY, Blyumberg E (1982) Mechanism of the epoxidation of alkenes by molecular oxygen. *Russ Chem Rev* 51(6):582
227. Lercker G, Rodriguez-Estrada MT, Bonoli M (2003) Analysis of the oxidation products of cis- and trans-octadecenoate methyl esters by capillary gas chromatography–ion-trap mass spectrometry: I. Epoxide and dimeric compounds. *J Chromatogr A* 985(1):333–342
228. Giuffrida F et al (2004) Formation and hydrolysis of triacylglycerol and sterols epoxides: role of unsaturated triacylglycerol peroxy radicals. *Free Radic Biol Med* 37(1):104–114
229. Lee H, Neville K (1967) *Handbook of epoxy resins*. Wiley, New York
230. Ratna D (2007) *Epoxy composites: impact resistance and flame retardancy*, vol 16. Smithers Rapra Publishing, Shrewsbury
231. Hamerton I (1996) *Recent developments in epoxy resins*, vol 91. Smithers Rapra Publishing, Shrewsbury
232. Dugmore T (2011) *The autoxidation of biodiesel and its effects on engine lubricants*. Doctoral Dissertation, University of York
233. Findley TW, Swern D, Scanlan JT (1945) Epoxidation of unsaturated fatty materials with peracetic acid in glacial acetic acid solution. *J Am Chem Soc* 67(3):412–414
234. Schmitz WR, Wallace JG (1954) Epoxidation of methyl oleate with hydrogen peroxide. *J Am Oil Chem Soc* 31(9):363–365
235. Park S-J et al (2001) Thermal stability of imidized epoxy blends initiated by *N*-Benzylpyrazinium hexafluoroantimonate salt. *Macromolecules* 34(22):7573–7575
236. Stemmelen M et al (2011) A fully biobased epoxy resin from vegetable oils: from the synthesis of the precursors by thiol-ene reaction to the study of the final material. *J Polym Sci Part A Polym Chem* 49(11):2434–2444
237. Gerbase AE, Petzhold CL, Costa APO (2002) Dynamic mechanical and thermal behavior of epoxy resins based on soybean oil. *J Am Oil Chem Soc* 79(8):797–802
238. (2012) Thermal cure kinetics of epoxidized linseed oil with anhydride hardener. *J Therm Anal Calorim* 107(3): 989–998
239. Park SJ, Jin FL, Lee JR (2004) Synthesis and thermal properties of epoxidized vegetable oil. *Macromol Rapid Commun* 25(6):724–727
240. Park SJ, Jin FL, Lee JR (2004) Effect of biodegradable epoxidized castor oil on physicochemical and mechanical properties of epoxy resins. *Macromol Chem Phys* 205(15):2048–2054
241. Jin FL, Park SJ (2008) Thermomechanical behavior of epoxy resins modified with epoxidized vegetable oils. *Polym Int* 57(4):577–583
242. Altuna F et al (2011) Thermal and mechanical properties of anhydride-cured epoxy resins with different contents of biobased epoxidized soybean oil. *J Appl Polym Sci* 120(2):789–798
243. Ding C et al (2015) New insights into the curing of epoxidized linseed oil with dicarboxylic acids. *Green Chem* 17(7):4000–4008
244. Galià M et al (2010) Vegetable oil-based thermosetting polymers. *Eur J Lipid Sci Technol* 112(1):87–96
245. Lu Y, Larock RC (2009) Novel polymeric materials from vegetable oils and vinyl monomers: preparation, properties, and applications. *Chemsuschem* 2(2):136–147
246. Tan S, Chow W (2010) Biobased epoxidized vegetable oils and its greener epoxy blends: a review. *Polym Plast Technol Eng* 49(15):1581–1590
247. Ding C, Matharu AS (2014) Recent developments on biobased curing agents: a review of their preparation and use. *Acs Sustain Chem Eng* 2(10):2217–2236
248. Crivello J, Narayan R, Sternstein S (1997) Fabrication and mechanical characterization of glass fiber reinforced UV-cured composites from epoxidized vegetable oils. *J Appl Polym Sci* 64(11):2073–2087
249. Supanchaiyamat N et al (2014) Bio-based thermoset composites from epoxidised linseed oil and expanded starch. *RSC Adv* 4(44):23304–23313
250. Petrović ZS et al (2010) Vegetable oil-based triols from hydroformylated fatty acids and polyurethane elastomers. *Eur J Lipid Sci Technol* 112(1):97–102
251. Petrović ZS (2008) Polyurethanes from vegetable oils. *Polym Rev* 48(1):109–155
252. Ahmad S et al (2003) A polyesteramide from *Pongamia glabra* oil for biologically safe anticorrosive coating. *Prog Org Coat* 47(2):95–102

253. Goud VV, Pradhan NC, Patwardhan AV (2006) Epoxidation of karanja (*Pongamia glabra*) oil by H_2O_2 . J Am Oil Chem Soc 83(7):635–640
254. Goud VV et al (2007) Epoxidation of karanja (*Pongamia glabra*) oil catalysed by acidic ion exchange resin. Eur J Lipid Sci Technol 109(6):575–584
255. Goud VV et al (2007) Kinetics of epoxidation of *Jatropha* oil with peroxyacetic and peroxyformic acid catalysed by acidic ion exchange resin. Chem Eng Sci 62(15):4065–4076
256. Boruah M et al (2012) Preparation and characterization of *Jatropha curcas* oil based alkyd resin suitable for surface coating. Prog Org Coat 74(3):596–602
257. Gogoi P et al (2014) *Jatropha curcas* oil based alkyd/epoxy resin/expanded graphite (EG) reinforced bio-composite: evaluation of the thermal, mechanical and flame retardancy properties. Prog Org Coat 77(1):87–93
258. Ibrahim MH, Steinbüchel A (2009) Poly (3-hydroxybutyrate) production from glycerol by *Zobellia denitrificans* MW1 via high-cell-density fed-batch fermentation and simplified solvent extraction. Appl Environ Microbiol 75(19):6222–6231
259. Kalaiyehzini D, Ramachandran KB (2015) Biosynthesis of poly-3-hydroxybutyrate (PHB) from glycerol by *Paracoccus denitrificans* in a batch bioreactor: effect of process variables. Prep Biochem Biotechnol 45(1):69–83
260. Mothes G, Schnorpfel C, Ackermann JU (2007) Production of PHB from crude glycerol. Eng Life Sci 7(5):475–479
261. Naranjo JM et al (2013) Valorization of glycerol through the production of biopolymers: the PHB case using *Bacillus megaterium*. Bioresour Technol 133:38–44
262. Kachrimanidou V et al (2014) Sunflower-based biorefinery: poly (3-hydroxybutyrate) and poly (3-hydroxybutyrate-co-3-hydroxyvalerate) production from crude glycerol, sunflower meal and levulinic acid. Bioresour Technol 172:121–130
263. Papanikolaou S et al (2008) Biotechnological valorisation of raw glycerol discharged after biodiesel (fatty acid methyl esters) manufacturing process: production of 1,3-propanediol, citric acid and single cell oil. Biomass Bioenerg 32(1):60–71
264. Vivek N, Pandey A, Binod P (2016) Biological valorization of pure and crude glycerol into 1,3-propanediol using a novel isolate *Lactobacillus brevis* N1E9.3.3. Bioresour Technol 213:222–230
265. Calvino-Casilda V, Guerrero-Pérez MO, Bañares MA (2010) Microwave-activated direct synthesis of acrylonitrile from glycerol under mild conditions: effect of niobium as dopant of the V-Sb oxide catalytic system. Appl Catal B 95(3):192–196
266. Rodrigues IM, Coelho JFJ, Carvalho MGVS (2012) Isolation and valorisation of vegetable proteins from oilseed plants: methods, limitations and potential. J Food Eng 109(3):337–346
267. Altschul A (2012) New protein foods. Elsevier, Amsterdam
268. Wilcke H (2012) Soy protein and human nutrition. Elsevier, Amsterdam
269. Waglay A, Karboune S, Alli I (2014) Potato protein isolates: recovery and characterization of their properties. Food Chem 142:373–382
270. Bártová V et al (2015) Amino acid composition and nutritional value of four cultivated South American potato species. J Food Compos Anal 40:78–85
271. Friedman M, McDonald GM, Filadelfi-Keszi M (1997) Potato glycoalkaloids: chemistry, analysis, safety, and plant physiology. Crit Rev Plant Sci 16(1):55–132
272. Kemin (2006) Gly-Sea-Max™ Proprietary Brown Seaweed and Slendesta™ Potato Protein Extracts.
273. Ausich R et al. (2004) Method for the elimination of Kunitz and Bowman-Birk trypsin inhibitors and carboxypeptidase inhibitor from potato proteins. Google Patents
274. Sheabar FZ, Stomp R (2008) Method for controlling the yield and purity of proteinase inhibitor II during extraction. Google Patents
275. Coppola GM, Schuster HF (1987) Asymmetric synthesis. Wiley, New York
276. Itsuno S et al (1990) New solid-phase catalysts for asymmetric synthesis: cross-linked polymers containing a chiral Schiff base-zinc complex. J Org Chem 55(1):304–310
277. Hermansson J (1983) Direct liquid chromatographic resolution of racemic drugs using α 1-acid glycoprotein as the chiral stationary phase. J Chromatogr A 269:71–80
278. Armstrong DW, Liu Y, Ekborgott KH (1995) A covalently bonded teicoplanin chiral stationary phase for HPLC enantioseparations. Chirality 7(6):474–497
279. Farnfield M, Carey K, Cameron-Smith D (2005) Whey protein supplementation and resistance training to enhance muscle growth in young and older adults. Asia Pac J Clin Nutr 14:S69

280. Ha E, Zemel MB (2003) Functional properties of whey, whey components, and essential amino acids: mechanisms underlying health benefits for active people (review). *J Nutr Biochem* 14(5):251–258
281. Tipton KD et al (2004) Ingestion of casein and whey proteins result in muscle anabolism after resistance exercise. *Med Sci Sports Exerc* 36:2073–2081
282. Spalatel C (2012) Biotechnological valorisation of whey. *Innov Roman Food Biotechnol* 10:1
283. Zemel MB (2004) Role of calcium and dairy products in energy partitioning and weight management. *Am J Clin Nutr* 79(5):907S–912S
284. Yalcin AS (2006) Emerging therapeutic potential of whey proteins and peptides. *Curr Pharm Des* 12(13):1637–1643
285. Bounous G, Batist G, Gold P (1991) Whey proteins in cancer prevention. *Cancer Lett* 57(2):91–94
286. Regester GO et al (2003) Development of minor dairy components as therapeutic agents—Whey growth factor extract, a case study. *Aust J Dairy Technol* 58(2):104
287. Regester GO, Belford DA (1999) New therapeutics from a dairy byproduct—cheese whey. *Drug Dev Res* 46(3–4):286–291
288. Playford R et al (1999) Bovine colostrum is a health food supplement which prevents NSAID induced gut damage. *Gut* 44(5):653–658
289. Yu X et al (2015) A new way for the oil plant biomass valorization: polyphenols and proteins extraction from rapeseed stems and leaves assisted by pulsed electric fields. *Ind Crops Prod* 74:309–318
290. Smithers GW (2008) Whey and whey proteins—from ‘gutter-to-gold’. *Int Dairy J* 18(7):695–704
291. Baiano A (2014) Recovery of biomolecules from food wastes—a review. *Molecules* 19(9):14821–14842
292. Di Lullo GA et al (2002) Mapping the ligand-binding sites and disease-associated mutations on the most abundant protein in the human, type I collagen. *J Biol Chem* 277(6):4223–4231
293. Pal GK, Suresh PV (2016) Sustainable valorisation of seafood by-products: recovery of collagen and development of collagen-based novel functional food ingredients. *Innov Food Sci Emerg Technol* 37 Part B:201–215
294. Chojnacka K et al (2011) A review: valorization of keratinous materials. *Waste Biomass Valor* 2(3):317–321
295. Tanabe T, Okitsu N, Yamauchi K (2004) Fabrication and characterization of chemically crosslinked keratin films. *Mater Sci Eng C* 24(3):441–446
296. Poole AJ, Church JS, Huson MG (2009) Environmentally sustainable fibers from regenerated protein. *Biomacromolecules* 10(1):1–8
297. Narasimhamoorthy B et al (2013) Effect of harvest date on PI2, total protein, TGA content and tuber performance in potato. *Am J Potato Res* 90(6):561–569
298. Berghaller W, Witt W, Goldau HP (1999) Potato starch technology. *Starch-Stärke* 51(7):235–242
299. Pennington LJ, Schmidt WF (1982) Belladonna alkaloids and phenobarbital combination pharmaceuticals analysis I: high-performance liquid chromatographic determinations of hyoscyamine-atropine and scopolamine. *J Pharm Sci* 71(8):951–953
300. Organization, W.H., 19th WHO Model List of Essential Medicines (April 2015). Geneva
301. Alt V et al (2005) Optimization of glycoalkaloid analysis for use in industrial potato fruit juice downstreaming. *Eng Life Sci* 5(6):562–567
302. Bates RP, Morris J, Crandall PG (2001) Principles and practices of small-and medium-scale fruit juice processing. *Food Agric Org*
303. Ciriminna R et al (2014) Limonene: a versatile chemical of the bioeconomy. *Chem Commun* 50(97):15288–15296
304. Braddock RJ (1999) Handbook of citrus by-products and processing technology. Wiley, New York
305. Dugo G, Di Giacomo A, Taylor & Francis Group (2002) Citrus: the genus *Citrus*, medicinal and aromatic plants-industrial profiles series. CRC Press, New York
306. Marín FR et al (2007) By-products from different citrus processes as a source of customized functional fibres. *Food Chem* 100(2):736–741
307. Bakkali F et al (2008) Biological effects of essential oils—a review. *Food Chem Toxicol* 46(2):446–475
308. Burt S (2004) Essential oils: their antibacterial properties and potential applications in foods—a review. *Int J Food Microbiol* 94(3):223–253
309. Sample EW (2013) System and Method for Continuous Citrus Peel Cellular Expansion. Google Patents

310. Pfaltzgraff LA et al (2013) Food waste biomass: a resource for high-value chemicals. *Green Chem* 15(2):307–314
311. Pfaltzgraff L, Clark J (2014) Green chemistry, biorefineries and second generation strategies for re-use of waste: an overview. *Adv Biorefineries Biomass Waste Supply Chain Exploit* 1
312. Kimball D (2012) *Citrus processing: a complete guide*. Springer Science & Business Media, New York
313. Clark JH et al. (2015) Microwave assisted citrus waste biorefinery. Google Patents
314. Filly A et al (2014) Solvent-free microwave extraction of essential oil from aromatic herbs: from laboratory to pilot and industrial scale. *Food Chem* 150:193–198
315. Pardo G, Zufía J (2012) Life cycle assessment of food-preservation technologies. *J Clean Prod* 28:198–207
316. Mellouk H et al (2016) Valorization of industrial wastes from French maritime pine bark by solvent free microwave extraction of volatiles. *J Clean Prod* 112:4398–4405
317. Ferhat MA, Meklati BY, Chemat F (2007) Comparison of different isolation methods of essential oil from Citrus fruits: cold pressing, hydrodistillation and microwave 'dry' distillation. *Flavour Fragr J* 22(6):494–504
318. Sahraoui N et al (2011) Valorization of citrus by-products using microwave steam distillation (MSD). *Innov Food Sci Emerg Technol* 12(2):163–170
319. Kratchanova M et al (1994) Extraction of pectin from fruit materials pretreated in an electromagnetic field of super-high frequency. *Carbohydr Polym* 25(3):141–144
320. Kratchanova M, Pavlova E, Panchev I (2004) The effect of microwave heating of fresh orange peels on the fruit tissue and quality of extracted pectin. *Carbohydr Polym* 56(2):181–185
321. Fishman ML et al (1999) Characterization of pectin, flash-extracted from orange albedo by microwave heating, under pressure. *Carbohydr Res* 323(1):126–138
322. Ghosh A, Sain M (2006) Composite from wood fibres bonded with renewable wood resin. *Polym Polym Compos* 14(3):217–227
323. Attard TM et al (2016) Impact of supercritical extraction on solid fuel wood pellet properties and off-gassing during storage. *Green Chem* 18(9):2682–2690
324. Attard TM et al (2015) Sugarcane waste as a valuable source of lipophilic molecules. *Ind Crops Prod* 76:95–103
325. Attard TM et al (2016) Supercritical CO₂ extraction as an effective pre-treatment step for wax extraction in a miscanthus biorefinery. *ACS Sustain Chem Eng* 4:5979
326. Attard TM et al (2015) Supercritical extraction as an effective first-step in a maize stover biorefinery. *RSC Adv* 5(54):43831–43838
327. Dodson J et al (2013) Alkali silicates and structured mesoporous silicas from biomass power station wastes: the emergence of bio-MCMs. *Green Chem* 15(5):1203–1210
328. Dodson JR et al (2011) The chemical value of wheat straw combustion residues. *RSC Adv* 1(3):523–530
329. Tian G (2015) *Renewable materials from renewable resources*. University of York
330. Matharu A (2014) *Inorganic polymer bio-composites*. University of York: HGCA



Valorization of Proteins from Co- and By-Products from the Fish and Meat Industry

Tone Aspevik¹ · Åge Oterhals¹ · Sissel Beate Rønning² ·
Themistoklis Altintzoglou³ · Sileshi Gizachew Wubshet² ·
Asbjørn Gildberg^{3,4} · Nils Kristian Afseth² ·
Ragnhild Dragøy Whitaker³ · Diana Lindberg² 

Received: 27 January 2017 / Accepted: 16 April 2017 / Published online: 2 May 2017
© Springer International Publishing Switzerland 2017

Abstract Large volumes of protein-rich residual raw materials, such as heads, bones, carcasses, blood, skin, viscera, hooves and feathers, are created as a result of processing of animals from fisheries, aquaculture, livestock and poultry sectors. These residuals contain proteins and other essential nutrients with potentially bioactive properties, eligible for recycling and upgrading for higher-value products, e.g. for human, pet food and feed purposes. Here, we aim to cover all the important aspects of achieving optimal utilization of proteins in such residual raw materials, identifying those eligible for human consumption as co-products and for feed applications as by-products. Strict legislation regulates the utilization of various animal-based co- and by-products, representing a major hurdle if not addressed properly. Thorough understanding and optimization of all parts of the production chain, including conservation and processing, are important prerequisites for successful upgrading and industrial implementation of such products. This review includes industrially applied technologies such as freezing/cooling, acid preservation, salting, rendering and protein hydrolysis. In this regard, it is important to achieve stable production and quality through all the steps in the manufacturing chain, preferably supported by at- or online

The original version of this article was revised: The spelling of the fourth author was incorrect. The correct name is Themistoklis Altintzoglou.

Chapter 5 was originally published as Aspevik, T., Oterhals, A., Rønning, S. B., Altintzoglou, T., Wubshet, S. G., Gildberg, A., Afseth, N. K., Whitaker, R. D. & Lindberg, D. Top Curr Chem (Z) (2017) 375: 53. DOI 10.1007/s41061-017-0143-6.

✉ Diana Lindberg
diana.lindberg@nofima.no

¹ Nofima AS, P.B. 1425 Oasen, 5828 Bergen, Norway

² Nofima AS, P.B. 210, 1431 Ås, Norway

³ Nofima AS, P.B. 6122 Langnes, 9291 Tromsø, Norway

⁴ Ildervegen 27, 9017 Tromsø, Norway

quality control points in the actual processing step. If aiming for the human market, knowledge of consumer trends and awareness are important for production and successful introduction of new products and ingredients.

Keywords Food and feed applications · Enzymatic hydrolysis · Downstream processing · Bioactivity · Analytical chemistry · Consumers

Abbreviations

ABPs	Animal by-products
BAPs	Bioactive peptides
BSE	Bovine spongiform encephalopathy
EU	European Union
FTIR	Fourier-transform infrared
TSE	Transmissible spongiform encephalopathy

1 Introduction

The rapid growth, urbanization and increasing prosperity of the world population demand improved utilization of existing protein sources along with development of new and sustainable food production. The global demand for protein is expected to double by the year 2050. This is due to not only population growth but also increased recognition of the important role of protein in a healthy diet in general and especially for children and the growing elderly population [1]. Fish and meat products are important protein sources in the human diet and contain essential amino acids, minerals and vitamins. In industrial fish and meat processing, the main goal is to process the main products, such as fillets, chops and mince. However, these processes generate huge amounts of protein-rich residual raw materials. About 40–60 % of the total weight of animals and fishes are classified as residuals. This includes heads, bones, carcasses, blood, skin, viscera, hooves and feathers, depending on the species. Much of this material has great potential for higher-value applications in food and feed. This review focusses on how to increase the value of such material derived from livestock, poultry, fisheries, and aquaculture sectors. Such residuals can be divided into co-products, which can be used for human consumption, and by-products, which cannot (Fig. 1). Applications of by-products are strictly regulated; this review provides an overview of the most important European regulations. Moreover, it presents more established industrial processes, e.g. ensilage and rendering, as well as emerging processes, i.e. enzymatic hydrolysis, for processing of fish and meat co- and by-products. When selecting the most suitable process for each specific situation, a trade-off is possible. Established processes, with relatively easy production and low investment cost, represent a somewhat restricted product segment. On the other hand, more complex technology often requires higher investment cost, but allows for wider end markets and possibly higher market price for some products. The available volume, its quality and nutritional properties, together with current legislation, regulate the potential use and processing demands for residual raw materials. In

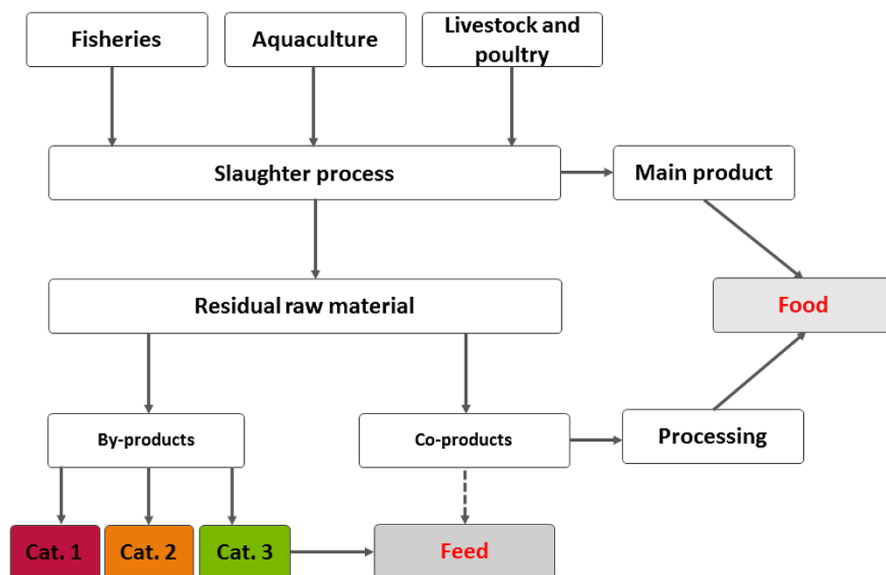


Fig. 1 Process from fisheries and farming of fish and livestock to co-products and by-products. Co-products are defined herein as residual raw materials from the slaughter process that still have food-grade quality and can be used for food. Other material not suitable for human consumption, for commercial or safety and/or regulatory reasons, is defined as by-products, separated into three categories (1–3) based on their origin and potential use in feed applications

addition, market demand, consumer acceptance, feasibility, technology awareness, the required level of process control, and the available infrastructure influence the choice of the most beneficial and cost-effective process.

2 Volumes and Nutritional Values

The total global production of fish from aquaculture and fisheries in 2014 is estimated to be 128 million tons (Table 1) [2]. About 70 million tons of fish are processed as main products globally, indicating that residual raw materials constitute more than half of the entire fish weight. It is important to stress that, in some cases, discarded fish are not included in reporting of volumes of residual raw materials and hence represent large lost values, estimated at 7.3 million tons [3]. In Norway, white fish and pelagic fisheries resulted in 43 and 12 % residual raw materials in 2015, respectively [4]. Here, the most underutilized materials consist of heads, intestines and roe from whitefish, and blood from aquaculture processing [4]. Another example is tuna processing, where reported values range from 50 to 55 %, or up to 70 % [5].

Looking at meat, total production has reached more than 263 million tons annually [6]. Table 2 presents production of some major types of livestock together with the percentage of by-products resulting from processing of these species in Norway [7–9]. Other figures from the USA on the portion of residuals generated, given in live weight of livestock, are 49 % from cattle, 44 % from pigs, and 37 %

Table 1 Summary of production of freshwater, marine and diadromous (living in fresh and salt water) fishes in 2014

Continent	Inland waters		Marine areas		All production (ton)	Aquaculture (ton)	Aquaculture value (USD 000s)
	Sub-total all production (ton)	Sub-total aquaculture (ton)	Sub-total all production (ton)	Sub-total aquaculture (ton)			
Africa	4,527,980	1,682,039	5,455,976	12,814	9,983,955	1,694,852	3,573,168
Americas	1,607,879	1,076,073	13,870,982	1,018,460	15,478,861	2,094,533	11,112,732
Asia	47,557,457	40,319,666	38,759,848	3,388,124	86,317,305	43,707,790	73,760,477
Europe	831,604	477,051	14,205,697	1,820,109	15,037,301	2,297,160	12,099,014
Oceania	20,165	4,432	1,281,690	63,124	1,301,856	67,557	756,601
Summary					128,127,276	49,861,891	101,301,993

Data based on Food and Agriculture Organization of the United Nations (FAO) global production statistics [2], divided into continental and global data with a subset showing aquaculture production

Table 2 Production summary of major types of livestock by continent in 2014 based on Food and Agriculture Organization Corporate Statistical Database (FAOSTAT) data [8]

Continent	Cattle 1000 head	Pigs 1000 head	Sheep 1000 head	Chickens 1000 head	Turkeys 1000 head
Africa	312,327	34,332	340,749	1,809,059	23,658
Americas	508,942	169,902	86,074	5,436,151	312,477
Asia	491,020	590,548	536,251	11,923,472	14,575
Europe	122,011	185,546	130,118	2,114,988	110,786
Oceania	40,226	5346	102,432	126,014	1377
Summary world	1,474,526	985,673	1,195,624	21,409 683	462,873
By-product (%) ^a	60	37	63	51	45

The final row shows the percentage of residual raw materials resulting from slaughter of each type of livestock based on Norwegian data [9]

^a Figures based on the assumption that everything not sold as meat from the animals can be considered as by-product

from broilers [10]. Independent of the particular percentages, as seen for fish above, the amount of residual raw material is directly related to the physiology of each species; For example, pig slaughter results in low amounts of residuals because large parts of the skin and fat contain substantial amounts of easily solubilized collagen, used as a binding ingredient in sausages and other mixed products. For cattle, almost 20 % of the residual material consists of bones. Bone marrow contains large amounts of protein and was considered an excellent feed ingredient before the bovine spongiform encephalopathy (BSE) scandal in 1992. Nowadays, marrow bone is regulated as a specified risk material for destruction.

All these residual raw materials represent a different set of possibilities and challenges that it is important to investigate and solve before successful industrial processing. Although a large part of this biomass is utilized today in many countries, significant quantities are still under- or unutilized. Both animal and fish residuals have excellent nutritional value, and this material contains large amounts of high-quality protein, lipid, micronutrients and minerals that could be better utilized towards human consumption and other kinds of product. The protein content of meat-based residuals is generally 10–23 g per 100 g raw material, with porcine chitterlings and brains at the lower end and ears, feet and liver at the top end [11]. The protein in these different organs has different nutritional value and is more or less accessible, which is important from a processing perspective.

3 Regulatory Framework

The laws and regulations governing collection, transport, storage, handling, processing, use and disposal of residual raw materials are often-overlooked factors that severely influence the number of applications available for processing of this material. It is outside the scope of this review to cover all regulations worldwide; rather, we exemplify their importance by reference to European Union (EU)

legislation. When material is found to be unfit for food but suitable for feed, it is classified as an animal by-product (ABP) and must be processed at appropriate by-product plants, according to EU regulations. After the material has reached such a facility, it can no longer be upgraded for food use. It is therefore imperative that as much as possible of residual raw materials is handled according to food hygiene regulations if the intended use is processing for human consumption.

The EU has developed an elaborate legislation framework governing the use of residual raw materials from fisheries, aquaculture, livestock, and poultry industries. The type and quality of each residual material are of utmost importance for its further processing possibilities and define its use for food or feed applications, according to the hygiene rules for food of animal origin [12]. Raw materials that do not meet the general rules for food hygiene or are classified as not suitable for human consumption are regulated by the rules of ABP regulations [13] and implementation of health rules for animal by-products and derived products not intended for human consumption [14]. ABPs can be divided into three categories (1–3; Fig. 2) based on their origin and potential risk to public and animal health and the environment. No ABPs can be used for human consumption, and only low-risk, category 3 by-products can be used for feed production. Some animal parts are not eligible for either food or feed use and are classified as category 1, specified risk materials. These include bone marrow, spinal cords and brains from cattle, sheep and goats, and sick and dead animals [13]. Category 3 by-products are further classified according to their origin, i.e. ruminants or non-ruminants, due to the risk of transmissible spongiform encephalopathy (TSE). A compilation of regulations for use of different category 3 ABPs in feed is presented in Table 3. ABP [13] together with TSE regulations [15] are major components of the EU's strategy to eradicate feed-borne crises such as BSE in cattle, foot and mouth disease and dioxin contamination. The main objective of these regulations is to protect the population and farmed animals from any health risks related to contamination by infectious microorganisms or heat-stable bacteria-derived toxins (e.g. histamine and enterotoxins).



Fig. 2 Brief summary of by-products included in each of three animal by-product (ABP) categories regulated in the EU, and examples of some approved uses of ABPs in each category [13]

Table 3 Overview of category 3 animal by-product material from different animals suitable for feed use according to TSE regulation [15]

	Ruminants	Non-ruminants	Fish	Pets and fur animals
Processed protein from ruminants	✗	✗	✗	✓
Processed protein from non-ruminants	✗	✗	✓	✓
Blood from ruminants	✗	✗	✗	✓
Blood from non-ruminants	✗	✓	✓	✓
Hydrolyzed protein from ruminants	✗	✗	✗	✓
Hydrolyzed protein from non-ruminants	✓	✓	✓	✓
Collagen and gelatin from ruminants	✗	✗	✗	✓
Collagen and gelatin from non-ruminants	✓	✓	✓	✓
Fishmeal	✗	✓	✓	✓

Production plants that process category 3 by-products must comply with the general hygiene requirements provided in ABP regulations [13] and have a documented pest control program. Materials that have not received specific heat treatment during start-up or leakage must be either recirculated through the applied heat treatment step, collected and reprocessed, or discarded. The health rules regarding ABPs [14] describe several processing methods approved for heat treatment of category 3 by-products, based on methods 1–5 and 7 for material originating from domestic animals and methods 1–7 for aquatic animals (Table 4). The different heat treatment operation conditions are based on the following critical control parameters: (1) raw material particle size, (2) achieved core particle temperature level, (3) pressure, (4) duration of heat treatment and (5) in case of chemical treatment, the achieved pH level. In the case of fish processing, the material rapidly becomes tender as muscle proteins coagulate and disintegrate when exposed to mechanical forces in a cooker, strainer, screw-press or screw conveyor. Based on experience, reduction of particle size prior to the heat treatment step is not required to achieve uniform temperature throughout fish material [16]. Moreover, high shear forces during grinding might cause fat separation problems due to formation of emulsions and should be avoided if not needed.

4 Post-harvesting Handling, Industrial Processing and Analysis of Meat and Fish Residual Raw Materials

Both meat and fish residual raw materials represent a rich supply of easily available nutrients. However, they have high moisture content and are therefore easily spoilt in presence of microorganisms. Microorganisms can contaminate such materials via the fish and animals themselves, e.g. from the gastrointestinal tract or by contamination from hooves and/or hide and skin. Contamination can also come from the processing environment, e.g. due to poor employee hygiene or process facility cleansing routines. The commonest type of contamination is bacterial, but yeast and molds can also contaminate meat products. A broad battery of techniques are used post-harvesting for preservation of meat- and fish-based products [17], also

Table 4 Approved alternative methods for heat treatment of category 3 animal by-products [14]

Method	Particle size (mm)	Core temperature (°C)	Time (min)	Pressure (bar)	pH	Batch	Continuous
1	50	>133	20	3		×	×
2	150	>100	125	NS		×	
	150	>110	120	NS		×	
	150	>120	50	NS		×	
3	30	>100	95	NS		×	×
	30	>110	55	NS		×	×
	30	>120	13	NS		×	×
4 ^a	30	>100	16	NS		×	×
	30	>110	13	NS		×	×
	30	>120	8	NS		×	×
	30	>130	3	NS		×	×
5 ^b	20	>80	120	NS		×	×
	20	>100	60	NS		×	×
6 ^c	50	>90	60	NS	<4.0	×	×
	30	>70	30	NS	<4.0	×	×
7 ^d	NS	>76	20	NS		×	×
	NS	>70	20	NS		×	×

NS not stated

^a Carver–Greenfield process, i.e. heating in a vessel with added oil

^b The by-products must be heat coagulated and mechanically pressed to remove water and fat before final heat treatment

^c Animal by-products originating from aquatic animals or aquatic invertebrates only

^d Method approved by Norwegian authorities (wild fish >70 °C, aquaculture fish >76 °C; Nygård [16]), or any method authorized by the competent authorities complying with the following microbiological standards: *Clostridium perfringens* absent in 1 g product after heat treatment, *Salmonella* absent in final product ($n = 5$; $c = 0$; $m = 0$; $M = 0$), *Enterobacteriaceae* ($n = 5$; $c = 2$; $m = 10$; $M = 300$ in 1 g)

being valid for by- and co-products [18]. In industrial processing, conservation can be done before processing, but it can also be coupled with processing methods, e.g. in the case of fish silage. Conservation can also be minimized or potentially excluded in cases where the slaughterhouse is close by or even connected to the processing facility for residual materials. This ensures valorization of absolutely fresh residual raw materials.

4.1 Chilling and Freezing

Chilling and freezing are preferred methods in the meat and poultry industry to preserve the quality of main products. Cooldown is performed after processing and removal of the main product. By- and co-products from both fish and meat can be handled in the same way to preserve their quality, and chilling/freezing is easily facilitated in established slaughterhouses. Plate freezing equipment is applied to block-freeze mixed residuals sold as wet feed to the fur animal industry.

Fish residuals present some additional problems associated with conservation. Psychrotrophic microorganisms, which can grow at temperature as low as $-5\text{ }^{\circ}\text{C}$, are present in fish from cold waters, affecting the temperature needed for effective conservation. Furthermore, the amount of microorganisms present in the digestive system of many fish species is dependent on season. Some smaller fish species such as capelin, herring, anchovy and sprat have high hydrolytic enzyme activity caused by active feeding on zooplankton during some periods of the year. Such species are prone to autolytic degradation and enhanced bacterial spoilage due to tissue softening and belly burst, which can be prevented by chilling.

Chilling of fish and residual raw materials onboard the fishing vessel is challenging. Many chilling techniques involve addition of water or ice to obtain heat transfer. Modern large-scale fishing vessels are normally equipped with active chilling systems based on circulation of refrigerated sea water or in combination with refrigerated fresh water to reduce salt uptake by fish. Low salt uptake is important to comply with fishmeal specifications regarding salt and ash content. Disinfection of pipes and the chilling system by ozone injection [19] or other antimicrobial agents improves the quality of recirculating water before addition of captured fish. This industrial practice has significantly improved the quality of pelagic fish caught for production of fishmeal and oil for use in animal feed, especially when combined with the optional addition of acetic acid. Chilling by addition of crushed ice is also possible but difficult to apply in large-scale operations. A promising option is production of ice slurry by partial freezing of sea water [20]. This technology results in pumpable ice and a very high chilling rate due to the content of small ice crystals and high cooling capacity. Excess blood-water generated by the above chilling technologies is generally drained off and pumped at sea. A novel cooling approach, avoiding addition of water, is use of solid carbon dioxide [21]. The choice of cooling medium and technology depends on several factors including the scale of the operation, the need for chilling to ensure quality before further processing, investments and energy consumption.

4.2 Organic Acid Preservation and Fish Silage

Preservation of meat- and fish-based foods using low-molecular-weight acids has been known for centuries [22]. Lactic, acetic, propionic, citric and benzoic acid are all organic acids used as food preservatives as well as being food ingredients, adding to their value and usefulness. This conservation principle is based on dissociation of the organic acid after diffusion through the microbial cell wall. This reduces the cytoplasmic pH, and in combination with accumulation of acid anions, inhibits cellular functions [22, 23].

Lactic and acetic acid are used to prevent contamination of freshly slaughtered beef carcasses after removal of hides and before or after evisceration [17]. Production of fish silage using organic acids is a well-established method in Scandinavia for preserving proteins and obtaining value-added products from fish raw material that would otherwise not be utilized. Fish silage can be described as a liquid product that develops when all or parts of the fish are treated with acid [24]. Use of fish silage in fish and animal feed has been widely studied, and it is regarded as a well-suited protein

source [25, 26]. For preparation of fish silage, the raw material must preferably be crushed or ground and the mixture stirred to ensure good contact between the raw material and added acid. At acidic pH <4.5, enzymes naturally present in fish viscera degrade and liquefy the fish tissue without risk of bacterial spoilage [26]. A schematic overview of the production of crude silage is shown in Fig. 3. Further downstream processing of crude silage is covered in Sect. 4.5.2.

The rate of autolysis is determined by the content and activity of digestive enzymes, pH and temperature. Most commonly, formic acid is used, producing a stable silage at pH of about 4.0–4.5. Antioxidants, such as ethoxyquin, are added to prevent oxidation of fish oil. Production of fish silage is a relative simple and low-cost technology, but requires strict process control to avoid growth of spoilage bacteria. Moreover, this approach can be adapted to operations of any scale, and the final products are stable and can be stored for long periods. In Norway, production of fish silage is the main technique used for preserving marine by-products [4]. The final product is not suitable for human consumption, and silage technology should preferably be based on fish and residuals found unfit for food production. Although there have been reports of ensiling of chicken intestines [27], we are not aware of examples of industrial implementation of this technology for preservation of ABPs.

4.3 Salting and Production of Fish Sauce

Fish sauce is used as a condiment in large areas of South-East Asia. Conservation during production is achieved by addition of sea salt to fish raw materials. The mixture is stored for several (6–12) months at ambient (normally tropical) temperatures, until a clear, amber water solution, rich in hydrolyzed protein and salt, can be recovered. Very few microorganisms can survive and grow at such high salt concentration, and after a couple of months of storage, only low numbers of harmless halophilic bacteria are present. In addition to hydrolyzed protein and free amino acids, this liquid also contains short-chain fatty acids and aldehydes, adding cheesy and meaty aromas to the dominant sharp, salty taste [28]. To obtain good product stability, the amount of salt added to the fresh raw material must be in the range of 1:3–1:2 by weight. Normally, industrial production is performed in square concrete tanks covering large flat areas close to fishing harbours. In principle, fish sauce can be produced from most kinds of fish raw materials. Lean raw materials are

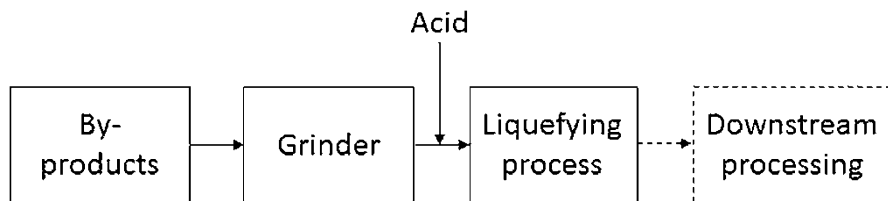


Fig. 3 Simplified illustration of silage process. The raw material must be ground for good contact with acid. At acidic pH, enzymes present in fish viscera degrade and liquefy fish tissue without risk of bacterial spoilage due to the low pH. The silage gradually liquefies due to the activity of tissue-degrading enzymes naturally present in the fish, mainly in viscera. Silage can either be used as is (crude) or be further processed (Fig. 5)

more suitable than fat raw materials, since the oil fraction does not contribute significantly to the volume of sauce recovered. Although fish sauce is normally produced from tropical fish species, pilot-scale experiments in Spain, Canada and Norway have shown that good-quality fish sauce can also be obtained from temperate- and cold-water fish species. Presence of intestinal tryptic enzymes, however, is of premium importance to achieve good protein hydrolysis and sauce recovery. There are considerable variations in the level of intestinal enzymes in small pelagic species, particularly in those from temperate and cold waters. To compensate for low levels of tryptic enzymes, suitable amounts of minced intestines from carnivorous white fishes can be added, since the intestines of such fishes always contain high levels of tryptic enzymes [29]. The major application of fish sauce is as a salting and flavouring condiment for vegetable dishes.

4.4 Rendering

Processing of animal and fish by-products is based on a common main principle called rendering technology. The raw material is heated to a temperature defined by legislation to eliminate any pathogenic bacteria, i.e. $>70\text{ }^{\circ}\text{C}$ for fish raw material and $>100\text{ }^{\circ}\text{C}$ for ABPs [14]. The main products from the rendering process are a protein powder and fat/oil. In this process, raw material is heat-coagulated followed by mechanical dewatering and separation steps to extract the oil phase, followed by thermal dewatering steps to concentrate the solubles and obtain dried high-protein powder [30, 31]. Such industrial-scale operations worldwide are fairly standardized, although some technology and process layout differences exist depending on the type of raw material and target product quality [32].

A general outline of the operation of such units for processing conventional fishmeal and oil is shown in Fig. 4. After heat treatment to $90\text{--}95\text{ }^{\circ}\text{C}$ in a continuous screw cooker, the fish raw material is run over a strainer to remove free water and oil phase before entering a screw press. The compression ratio, normally 1:3.5–1:4 in a fish press, causes fish oil and water to be squeezed out of the coagulated material and through the sieve plates. The water and oil together with solubles and fine particles are collected in the bottom of the press and mixed with the oil/water phase removed by the strainer. The combined liquid streams are heated to above $90\text{ }^{\circ}\text{C}$ and run over a decanter centrifuge to remove suspended fine solids before oil separation using a disc centrifuge.

4.5 Protein Hydrolysis

Protein hydrolysis is a method commonly used to extract proteins from meat and fish residuals. It involves breaking down proteins into smaller and more water-soluble peptides and free amino acids. The term “hydrolysis” literally means reaction with water, and protein hydrolysis requires presence of water molecules. The main purpose of hydrolysis is to increase protein recovery and the yield of valuable components. Protein hydrolysis can be achieved by chemical or enzymatic processes.

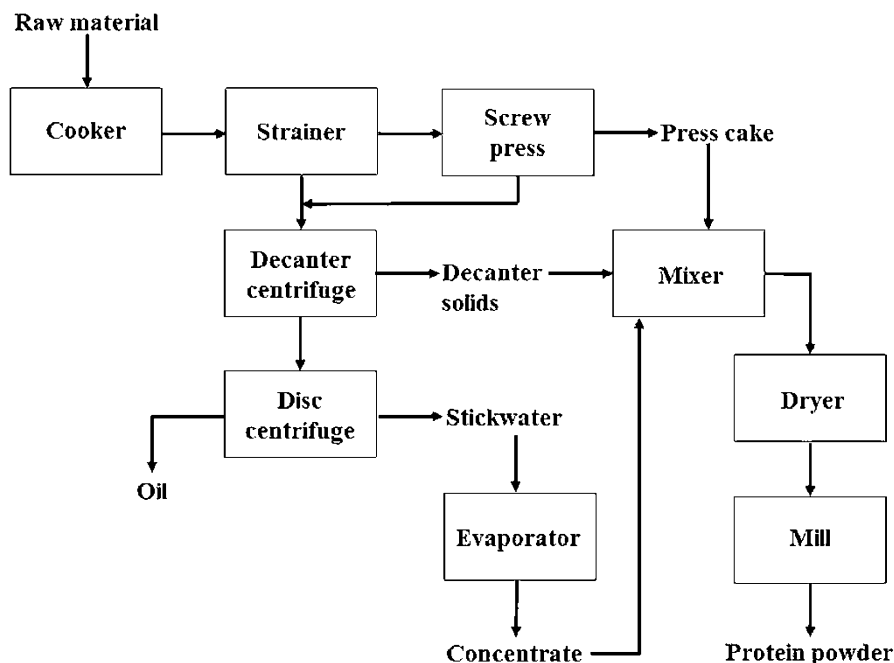


Fig. 4 Simplified process flow diagram showing the main unit operations applied in the wet rendering process. The raw material is cooked before entering the strainer. Decanter and disc centrifuges separate the solids, oil and stickwater phases. The stickwater is evaporated to a concentrate, mixed with the solids (press cake and decanter solids) and eventually dried to protein powder. The process conditions applied depend on the raw material and are listed in Table 4

4.5.1 Chemical Protein Hydrolysis

Chemical processing includes use of acid or alkali to cleave peptide bonds. Acidic protein hydrolysis is most commonly and frequently used to produce flavour enhancers from vegetables. Hydrolyzed vegetable protein is produced by treating the protein source with mineral acid (usually 4–6 M HCl) at 100–130 °C for 4–24 h followed by neutralization with NaOH [33, 34]. Alkaline hydrolysis is a straightforward process starting with protein solubilization by heat treatment followed by addition of alkaline agents (calcium, sodium or potassium hydroxide), adjustment of the temperature to a desired set point (usually 25–55 °C) and hydrolysis for several hours to achieve the desired hydrolysis product. Alkaline hydrolysis is less common in food and feed applications because of negative effects on the nutritive protein quality when using alkali. Thermal processing at alkaline pH can result in formation of toxic substances such as lysinoalanine, leads to racemization of L-amino acids to undesired D-amino acids and partly destroys the amino acids arginine, tyrosine, lysine, cysteine and threonine [35, 36].

Even though acid hydrolysis is preferred over alkali hydrolysis, the acid process can also influence the nutritive value of protein: the essential amino acids tryptophan and cysteine are destroyed, and glutamine and asparagine are converted

to glutamic acid and aspartic acid [37]. Moreover, neither acid nor alkali hydrolysis is specific, and both generate large amounts of salt in the final product after the neutralization process. In general, processes based on chemical hydrolysis yield hydrolysates with reduced nutritional quality and poor functionality that are restricted to use as flavour enhancers [36]. Chemical hydrolysis involves use of highly corrosive acid or base and requires glass-lined stainless-steel reactors that can withstand high pressure and temperature [37].

4.5.2 Enzymatic Protein Hydrolysis

Production of protein hydrolysates using protein-digesting enzymes, i.e. proteases, is a very promising alternative for valorization of proteins from meat and fish by- and co-products for different markets. The process used in this technology is regarded as mild and results in high product yield without prejudicing nutritional quality by e.g. destroying amino acids as seen with chemical hydrolysis. Enzymatic hydrolysis decreases the molecular weight of intrinsic proteins and peptides and increases the number of ionizable groups, resulting in new peptides that are smaller and more water-soluble than the intact proteins [38]. A typical hydrolysis process is characterized by an initial rapid burst phase where the substrate is in excess. As the enzymatic hydrolysis reaction progresses, the reaction rate levels off. This can be explained by reduced enzyme activity caused by one or a combination of the following factors: change in reaction pH, fewer peptide bonds available for cleavage [39], substrate [40] and product inhibition [41], as well as the possible presence of protease inhibitors in the substrate [42].

Enzymatic hydrolysis can be performed either by use of (endogenous) enzymes that occur naturally in the substrate or by addition of commercially available (exogenous) enzymes. Production of fish silage is essentially endogenous enzyme protein hydrolysis using visceral digestive enzymes. As described in Sect. 4.2, the organic acid preserves the fish by-products, but lowering the pH also serves to activate digestive proteases from the fish. Use of endogenous enzymes is seen as an inexpensive and mild process; however, it usually requires long hydrolysis times and results in nonspecific hydrolysis. Hence, use of exogenous enzymes is considered the best choice for producing food-grade protein hydrolysates, as the process is highly specific and reproducible and may enable tailoring of well-defined hydrolysate products. Generally, the additional cost associated with use of the latter type of enzymes is considered justifiable in the enzymatic hydrolysis industry. This is because the specificity and higher reproducibility enable production of products with potential to reach higher-paying markets, compared with products based on e.g. rendering or ensiling. There are a vast array of commercially available proteases, and a judicious choice should be made with regards to enzyme performance and cost [43].

Proteins are complex substrates containing peptide bonds with different accessibility to enzymatic cleavage [44]. Proteases are ubiquitous and exhibit a huge diversity of action, e.g. in terms of substrate selectivity, where individual proteases cleave the peptide bond, and regarding pH and temperature preference [45]. In processing of protein-rich materials, protease selection is based on both

product parameters, such as peptide size distribution, and the protein source [37]. Processing parameters also determine product outcome, e.g. enzyme-to-substrate ratio, pH and processing time. Careful optimization of these parameters enables development of products with selected properties.

A simplified protein hydrolysis process flow diagram is shown in Fig. 5. The raw material is minced and diluted with water to ensure good mixing and enzyme access [46]. Proper dilution can prevent product inhibition and maximize product yield, but added water is also a factor influencing processing costs associated with the drying process. A compromise between the desired product yield and the amount of water to be removed is imperative. The pH of the enzymatic hydrolysis process is often selected based on the optimum for a given protease [47]. However, adjusting the pH requires acid or base, which can result in high levels of salt in the final hydrolysate. This may reduce the nutritional value of the product and, if possible, should be avoided. At the end of the reaction, enzyme activity is terminated by its irreversible denaturation by heating to above 90 °C for at least 10 min. The crude hydrolysate is separated by a three-phase decanter into an oil, water and solid phase. The water phase constitutes water-soluble protein hydrolysate that can be concentrated in an evaporator followed by drying in a spray dryer. The solid phase contains bones and insoluble proteins that can be used in production of bone meal.

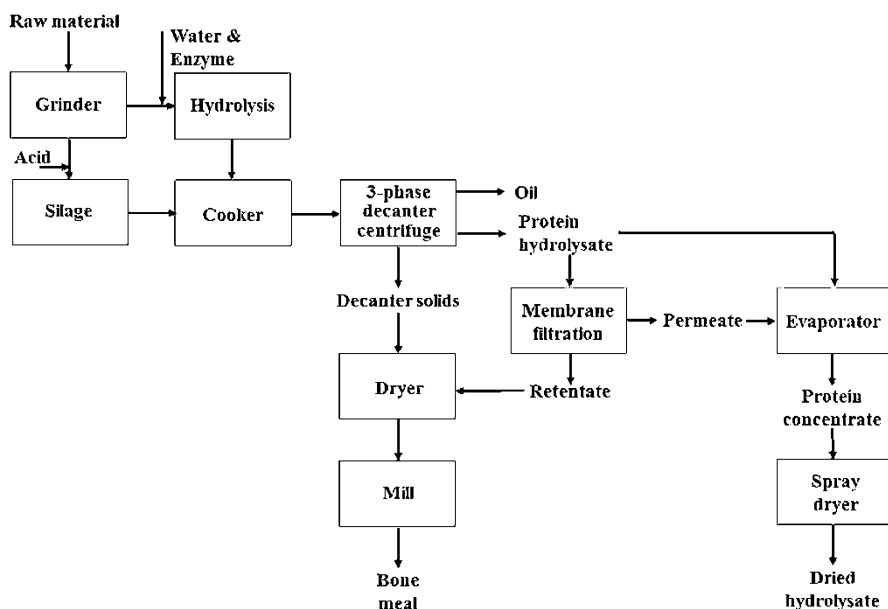


Fig. 5 Simplified process flow diagram showing the main unit operations applied in a hydrolysis process. The raw material is ground and mixed with water and enzyme, and the hydrolysis process is run using predefined time and temperature conditions. In case of silage production, acid is added to the raw material followed by hydrolyzation using inherent proteolytic enzyme activity at ambient temperature. Enzyme activity is terminated by cooking, and the crude hydrolysate is separated by three-phase decanter centrifuge into oil, soluble peptides and amino acids, and solid phases. The solids are dried and milled into bone meal. The protein hydrolysate can be membrane-filtrated to achieve desired a molecular weight distribution of peptides and eventually evaporated and dried to obtain dry protein hydrolysate

4.6 Analysis

Valorization of proteins from by- and co-products is, in most cases, based on heterogeneous raw materials with substantial and uncontrollable variation in quality. It is crucial to develop a production process that is robust towards raw material quality and variations in order to produce a stable product. An essential first step is thus evaluation of the raw material composition (e.g. fat, protein, moisture and ash). The Kjeldahl nitrogen method for protein determination is a commonly used analytical approach based on classical wet chemistry. The method provides figures for the total nitrogen content in a sample, providing the protein content after multiplication by a suitable nitrogen-to-protein conversion factor. Food matrices contain other nitrogenous organic compounds that will influence the determination of the true conversion factor, such as non-protein amino acids and nucleotides. Substrate-specific nitrogen-to-protein conversion factors have been calculated for poultry by-products, meat and bone meal, and Atlantic salmon head and backbone residuals [43, 48]. Another important parameter for characterization of raw material is the amino acid composition. Amino acid analysis is typically performed using chromatographic methods and can provide important knowledge about the nutritional properties of the raw material.

The above analytical measurements are performed offline and typically on a small representative sample from a batch of raw material, and the heterogeneity of meat- and fish-based products poses a significant challenge for representative sampling. Rapid and non-destructive spectroscopic techniques such as fluorescence, Raman and near-infrared spectroscopy have been demonstrated to be valuable tools for characterization of raw materials and products in terms of gross composition [49, 50]. Such approaches are expected to be essential for enzymatic protein hydrolysis in the future, where novel strategies for optimization and monitoring are used to obtain robust processes and products with defined quality.

One of the main control parameters in protein processing is the measured extent to which protein has been degraded. In this respect, measurement of the degree of hydrolysis, i.e. the percentage of cleaved peptide bonds, is a widely used approach for monitoring enzymatic protein hydrolysis. Another valuable parameter used for characterization of protein hydrolysates is the molecular weight distribution of the peptides. Unlike the degree of hydrolysis, which is always relative to the starting material, the molecular weight distribution is a direct measure of the peptides and proteins present. A major limitation of both of these measurement techniques is their laborious sample treatment and lengthy analysis time, limiting their use in industrial settings and as potential online monitoring tools. Recently, it was shown that Fourier-transform infrared (FTIR) spectra are useful for characterization of enzymatic protein hydrolysates [51, 52]. This technique has promising potential as an on- or at-line process monitoring tool for measurement of degree of hydrolysis. In the future, FTIR could thus be a valuable tool in industrial hydrolysate production by providing online process control, optimization possibilities and thus stable product quality.

Thorough characterization of individual peptides is also a very important aspect, especially if the chemistry of a given product is to be related to a specific sensory or

biological activity. In such cases, chromatographic fractionation and mass spectrometry has been shown to be a powerful technique for unequivocal elucidation of peptides [53].

4.7 Scale-Up of Bioprocesses

Many of the processes used to convert fish and animal residuals to higher-value products are developed at laboratory scale and demonstrated at pilot scale. When developing new products from these biomasses, many processes fail to meet significant challenges in the transition from laboratory to industry scale. Thus, the upscaling steps need to be carefully planned already at the start of product development. The scale-up phase is commonly called the demonstration phase, where a prototype product can be produced, capital and operating costs of the process calculated and the product tested in the market. This is an important step in bioprocess development. One of the reasons for these challenges is the chemistry during process scale-up, where differences in mixing, shear rate, and mass and heat transfer result in differences in how the biomass is processed compared with small-scale processes. In addition, production of process inhibitors that are effective at large but not small scale can be experienced [54, 55]. Another challenge is the economics of the demonstration phase, which is referred to as the “valley of death” in product development. There is a lack of available risk capital to perform this step, and limited access to demonstration plants that can be used to test processes. Demonstration plants are needed to reduce the risk and cost of the demonstration phase. It is too risky for most developers to invest in a full-scale facility before the process or market acceptance has been demonstrated. A solution that has been successful in many countries is the establishment of publicly financed demonstration plants. Here, flexible plants are built and constructed to accommodate a large variety of different processes. In such plants, many different developers can test and demonstrate their process and the product in the market. Due to the flexibility of such plants, operating and capital costs can be estimated; however, loss of biomass and process yield will likely occur when using such flexible plants, which can be improved in a plant specially designed for one process. Still, publicly financed demonstration plants have been and will be important for continued commercialization of new biomasses towards new products [56].

5 Applications

Co- and by-products from fish and animal processing have great potential for use in food and feed products, as well as for other markets. For human consumption, it is important that residuals are not classified as ABPs. As described in Sect. 2, in general, co- and by-product materials contain high amounts of protein, with essential amino acids, vitamins and minerals.

5.1 Food Ingredients

Fish and meat co-products have several applications in food ingredients, if the process implements systems such as good manufacturing practice (GMP) and hazard analysis and critical control point (HACCP) [57]. Variety meats and other parts of animals that are traditionally considered edible, such as kidneys, liver and oxtail, can be used directly for human consumption. Collagen-rich material such as animal hides and bones and fish skin are used for gelatin production. In Norway, dried cod heads, co-products from the stock- and klippfish industry, and meat-rich salmon trimmings and backbones are sold for different food applications. There are also many different applications of blood in food production, e.g. as an emulsifier, stabilizer or clarifier [58, 59]. However, to use animal blood for human consumption, it must be extracted using special equipment in direct contact with a cooled tank to avoid contamination [60].

For some time now, production of enzymatic protein hydrolysates has attracted interest for use in human nutrition. The process is mild and does not impair the nutritional quality of the original protein substrate. Protein hydrolysates may have several applications as food ingredients, e.g. as emulsifiers or foaming agents. Other applications are in specialized adult nutritional formulas, e.g. in diets for the elderly who need extra protein supplements to maintain their body weight, formulas for infants with allergies to intact food proteins or with congenital metabolic disorders, and nutraceuticals [61–64]. A current drawback with production of protein hydrolysates is the generation of bitter and unpalatable tastes during the hydrolysis process. Bitter taste is mainly ascribed to small peptides of less than 1000 Da with hydrophobic and/or aromatic amino acids [65]. Not only the presence of hydrophobic and aromatic amino acids, but also the amino acid peptide sequence is important for the intensity of such bitter taste. Based on the hydrolytic specificity of the protease chosen, it may be possible to produce hydrolysates with different bitter potency from the same substrate [66]. It may also be possible to remove the bitter taste using different debittering techniques [67], although such techniques may be challenging in industrially relevant applications [68]. In general, restricting the hydrolysis to reach a low degree of hydrolysis with a broad molecular weight distribution will reduce the formation of bitter taste [66]. In addition to formation of bitter taste, protein hydrolysates have flavours related to the raw material, i.e. fish, chicken, meat etc., which influence the overall flavour profile. These flavours are not related to the protein, but rather water-soluble compounds present in the substrate [66].

5.2 Feed

Use of processed animal proteins in fish feed has several advantages compared with currently used plant proteins, as plant-derived feed ingredients may contain anti-nutrients and allergenic proteins [69]. Meat and bone meal and fishmeal are the final products from rendering of animal and fish by-products, respectively (Sect. 4.4). These are excellent feed sources due to their high content of essential proteins, minerals and vitamins. However, especially meat and bone meal may be subjected

to large variations in nutritional quality. This is mainly caused by variations in the composition of the raw material and the harsh rendering temperatures applied [70, 71]. In addition, raw materials rich in bone will result in meal with high ash content, which is associated with low protein digestibility.

As described in Sect. 4.5.2, enzymatic protein hydrolysis results in two fractions with usable peptide content. One is a water phase with soluble peptides, and the other is a solid phase containing insoluble proteins and minerals. Both are frequently used as feed, although with large price differences. Protein hydrolysates have favourable formulation properties for animal feed, such as high solubility over wide ranges of pH and ionic strength, and a set of positive nutritional properties, including feeding stimulation and palatability enhancement, facilitated adsorption of e.g. labile and insoluble amino acids, and presence of beneficial hormone-like peptides [72]. As mentioned above, feed production is an area subject to a strict regulatory framework; a relevant review of the European regulatory framework and potential uses of ABPs for feed was published recently [73].

The potential valorization of proteins from fish residuals is not fully exploited [74]. In general, fish protein products have many applications within feed for the aquaculture sector and monogastric land animals such as weanling pigs, poultry and pets. The use and importance of fishmeal in the aquaculture sector have grown substantially over the last decades [75], and there is huge potential for increased fishmeal production from underutilized sources for this sector. Meat and bone meal from pigs and poultry may also have greater potential as feed ingredients within the aquaculture sector. In Europe, use of ABPs in fish feed has been restricted due to the risk of TSE, but these restrictions were lifted in 2012 for non-ruminant protein meal [76]. Recent studies evaluated the effects of poultry and porcine by-products as feed ingredients for Atlantic salmon and found that ABP material can provide about 50 % of dietary protein without negative effects on growth. Moreover, use of ABP protein did not show any severe negative effects on gut health, which is often a problem with plant-based diets [77, 78].

Piglets show greater preference for feed that includes either dried hydrolyzed porcine protein or fishmeal compared with other protein-rich feeds, e.g. soybean protein, wheat gluten and sweet milk whey. Feed based on fishmeal got the highest score at inclusion level of 50 g per kg, with high preference for feeds including hydrolyzed porcine protein over a wide inclusion range (50–200 g per kg) [79].

5.3 Pet Food

Companion animals, such as cats and dogs, represent additional consumption of protein via human purchasing. As such, this also represents an additional indirect protein need for humans. To ensure sustainable pet ownership in the future, pet food must be sustainable and affordable and effectively satisfy the requirements for good animal health and well-being [80]. In general, all category 3 by-product material is suitable for pet food production (Table 3). In production of wet pet food, only residuals that are eligible for human consumption (i.e. co-products), but found unfit for various reasons, can be used [13]. Pet food formulas are either dry, semi-dry or

wet, and protein content varies between 10 and 50 %, with wet foods at the lower and dry food at the upper end [81].

Meat and bone meal products derived from rendered ABPs are used by many pet food producers. However, their popularity is declining due to several reasons, including the name of the product and its perceived association with TSE risk. Also, poultry meal is a widely used protein ingredient in pet foods. In general, poultry protein meals are well utilized by dogs and cats and make up a large share of the total protein in many premium pet foods [82]. Protein hydrolysates of both animal and fish origin are also increasingly utilized for pet food applications. These hydrolysates contain short peptides and free amino acids that might act as feeding stimulants and palatability enhancers [71, 83]. Moreover, protein hydrolysates might have hypoallergenic [84] and bioactive properties (as discussed below), making them interesting pet food ingredients for companion animals with special needs.

5.4 Health-Promoting Products

By- and co-products from the fish and meat industry are rich sources of biologically active molecules with potential health-promoting effects. Such bioactive molecules can be included in e.g. food (nutraceuticals) and as active ingredients in cosmetics (cosmeceuticals). Bioactive peptides (BAPs) are short chains of amino acids with hormone- or drug-like activity that modulate physiological functions through interactions with specific therapeutic targets [85]. Numerous BAPs derived from co-products have been proven to exhibit a wide range of positive health effects, with most such research focussing on blood pressure lowering, blood sugar regulation, and anti-microbial and anti-oxidant activities [86–88]. In addition to a specific therapeutic function, peptides may have other beneficial effects; for example, rats fed with hydrolyzed fish protein showed reduced visceral adipose tissue mass [89], and peptides derived from collagen were shown to increase muscle mass and strength in elderly men [90]. BAPs from by-products can also have a positive effect on collagen production, which makes them attractive ingredients in cosmeceuticals for wound healing and skin aging [91].

A standard process for evaluating the health-promoting potential of BAPs comprises several stages of analysis involving both *in vitro* and *in vivo* experiments. Ideally, to validate the bioactivity of a given bioactive peptide, human intervention studies are necessary. However, such studies are expensive and typically conducted after selecting a potent candidate through a rigorous screening process. The majority of screening experiments for BAPs are performed using *in vitro* assays including enzymatic assays, cell cultures, genomic tests and *in vitro* digestion stimulation. Candidates identified through such screening exercises are further evaluated using animal models and eventually human intervention studies (Fig. 6).

A large proportion of the reported bioactivities of meat and fish protein hydrolysates are based on either chemical or enzyme-based bioassays. BAPs in food must be absorbed in the intestine during digestion, and enter the bloodstream to exert their physiological effect, although some peptides may act locally in the



Fig. 6 Comprehensive method platform for testing health-promoting ingredients, from preliminary in vitro digestion models, bioactivity screening assays, to extensive human intervention studies

stomach or intestine. After absorption, BAPs can act on a given therapeutic target as a single molecule or synergistically [92]. BAPs from different meat and fish processing co-products have been shown to possess bioactivities towards key therapeutic targets related to diseases such as diabetes, obesity and coronary heart disease [53, 93–95]. Cell models can provide additional knowledge after preliminary bioactivity screening assays, including endogenous effects, dose-response and target organ. Some peptides exert their effect on muscle development, while others influence liver, bone, angiogenesis, inflammation etc. It is therefore vital to use different types of cell model when examining such bioactivity effects.

5.5 Other Applications

It is important to stress that there are a huge number of applications for products based on meat and fish residual raw materials that are not covered above. Protein hydrolysates based on both chemical and enzyme production can be used as growth media in areas of fermentation and biotechnology for production of pharmaceuticals and recombinant proteins, as well as in diagnostic media [96]. Blood from various animals has also shown antioxidant and antimicrobial activity [97]. Also, bovine serum albumin extracted from blood is an important tool in microbiology and many enzyme assays. Various enzymes extracted from livestock livers are used in many biotechnology applications, e.g. several types of dehydrogenases and catalase from bovine liver and porcine liver esterase. Aside from being an excellent feed source, poultry feathers can be used for a range of non-food applications [98]. Examples span electrical and electronic applications, composite materials, oil adsorbents and generation of micro- and nanoparticles. Meat and bone meal and fat from the rendering process may also be used as fertilizers and biodiesel or as raw materials for the chemical industry, respectively [99].

6 Utilization of Co-products towards Consumer Products

In valorization of meat and fish by- and co-products, the human consumption market has been specifically challenging to reach. In the meantime, consumers are becoming increasingly concerned about the environment and sustainability. This trend is expected to continue or even increase in the future, with consumers aiming to influence industries via their consumption pattern, i.e. food, and particularly protein production [100]. Being an integral part of the value chain, consumers

influence both the levels of food waste and the acceptance of value-added co-products [101]. Still, challenges remain regarding regulations and the feasibility of introducing products for human consumption in terms of supply, control and economics [56]. Only minor efforts have been made so far to understand the best approaches for upgrading fish- and animal-based co-products to lucrative products for human consumption [102].

Fish- and animal-based by- and co-products can be used in development of new products or to replace ingredients in existing products. Much of this work is following an “industry push” strategy, where products are tested with consumers after most product development decisions have already been made [103]. Currently, there is a lack of awareness regarding the need for consumer acceptance, which is of utmost importance for market success of potential products based on ingredients from new sources [104, 105]. Thus, poor product development strategies can lead to product failure. To improve this strategy, implementation of systematic product testing will likely increase the chance of market success [106].

Information about products and production methods have repeatedly been shown to influence consumer choices [107]. Studies on use of added-value compounds usually rely on analytical and sensory testing processes that do not take into account the consumer perspective [108]. In rare cases, consumer acceptability studies are included, but usually on end products and without providing information about the origin of the ingredients [109]. When excluding information about origin in use of trained panels or consumers for tasting of food products, it is hard to estimate the actual acceptability of a product by consumers in the real market. Provision of relevant information as part of a balanced communication strategy could increase consumer demand for products with proteins from production methods with reduced environmental impact [110].

Consumers have adequate knowledge on how to use food ingredients and supplements, but besides segments of particular interest, they are rarely aware of product production methods [111, 112]. When new products or ingredients are presented to the market, consumers become more alert and curious regarding their origin [113]. This concern has been one of the main barriers to e.g. use of ABPs or genetically modified ingredients in salmon feed, despite the potential benefits [114]. Considering the fact that consumer acceptance varies and changes with exposure to products and information, it is possible to achieve potential improvement of products without sacrificing quality [115].

When consumers analyze their food choices, they are confronted with trade-offs between convenience, health and sustainability that may challenge their final decisions [116]. Thus, communicating one positive element of a product, such as “sustainability” or “using the whole animal”, should not come in the way of aspects such as “food safety”, “health”, “convenience”, “hedonic expectations” etc. In fact, it is more probable that products will be chosen by consumers if all positive elements of the product are combined with production information in a holistic and transparent reputation-building strategy. Such a strategy could be successful when used in combination with targeting of consumers that are interested in functional foods and likely to seek additional information about the product [117].

Despite continuous improvements, there has been an increase in public concerns about livestock and aquaculture production, due to food crises and the environmental impact of production practices [118]. This has led consumers away from consumption of meat proteins in favour of plant proteins [119]. An expected positive trend in the near future is that consumers will demand fish that is farmed under safe and controlled conditions in clean waters [120]. Therefore, any information supplied to consumers should focus on trust building, with transparent and balanced communication. This type of approach could establish a fertile ground for introduction of new products and ingredients in the market for human consumption, such as products based on sustainable co-products from fish and animals.

7 Challenges and Future Trends

There are a growing number of initiatives in the context of the foreseen transition from an oil-based economy to a bioeconomy. This includes concomitant awareness of consumers, producers and governments about the importance of recovery and recycling of what was previously regarded as waste. In many countries worldwide, research funding is being directed towards finding new methods to optimize recovery and exploitation of intrinsic raw material components, preferably using a biorefinery approach to enable maximum utilization. There is immense potential for growth when it comes to increased valorization of fish- and animal-based co- and by-products. As more products reach the market, producers will start competing for what are now inexpensive starting materials, and one can expect higher prices for residual materials in the future. At the same time, producers must be able to rely on a stable supply of raw materials to obtain the predictability required for production.

Many of the technologies described above form the basis of established industries, with well-established processing operations and well-known markets. Enzymatic protein hydrolysis represents an up-and-coming, relatively new industry based on a highly enabling technology, showing great promise based on published research. However, when implemented in industrial practice, results show that there are challenges related to controlling the number of variables that affect the properties and quality of the final product. This includes raw material variations, processing parameters such as pH, time, choice of enzyme and inactivation method in protein hydrolysis, choice of downstream unit operations and choice of drying method. Current industrial practices rely on traditional and established analytical tools for quality parameter evaluation. However, this methodology cannot provide the fast feedback required for production of products with specific properties. In the future, nondestructive spectroscopy-based technologies could be valuable tools for industrial production of protein hydrolysates, by providing online process control, new optimization possibilities and reduced product quality variation.

Considering the predictions of future food shortages, it makes sense to strive to use as much of high-quality meat and fish co-products for human consumption as possible. There is increasing interest in upgrading such residual materials for human consumption; however, consumer acceptance and preferences should be known and

targeted before products reach the market. Sometimes the desired market growth is hindered by a lack of synergy among stakeholders, and a lack of common vision. Achieving perfect collaboration among all stakeholders is challenging, but increased cooperation will lead to shared vision, strategic planning, targeted communication and overall image improvement.

Image improvement forms the foundation for societal acceptance, and vice versa, societal perceptions can also inform strategic decisions of stakeholders towards image improvement and positive reputation. Based on systematic research, stakeholders will reach a point where there is less “waste products” and “residual raw materials” but rather optimized utilization and processing of all resources.

Acknowledgements Grants 262308 and 262300 from the Norwegian Research Council are acknowledged.

Compliance with Ethical Standards

Funding This work is partly funded by Grants 262308 and 262300 from the Norwegian Research Council.

Conflict of interest Authors Aspevik, T., Oterhals, Å., Rønning, S. B., Altintzoglou, T., Wubshet, S. G., Gildberg, A., Afseth N. K., Whitaker, R. D., and Lindberg, D. declare that they have no conflicts of interest.

References

1. Boland MJ, Rae AN, Vereijken JM, Muwissen MPM, Fisher ARH, van Boekel MAJS et al (2013) The future supply of animal-derived protein for human consumption. *Trends Food Sci Technol* 29:62–73
2. FAO (2017) Fisheries statistical collections. Global production. <http://www.fao.org/fishery/statistics/global-production/en>. Accessed 03 Jan 2017
3. Keheller K (2005) Discards of the world's marine fisheries. An update. FAO Technical paper 470. Food and Agriculture Organization of the United Nations, Rome
4. Richardsen R, Nystøyl R, Strandheim G, Marthinussen A (2016) Analyse av marint restråstoff. SINTEF report A27704. SINTEF AS, Trondheim, Norway
5. Gamarro EG, Orawattanamateekul W, Sentina J, Gopal TKS (2013) By-products of tuna processing. In: FAO (ed) GLOBEFISH Research Programme, vol 112. Food and Agriculture Organization of the United Nations, Rome
6. Gustavsson J, Cederberg C, Sonesson U, Emanuelsson A (2013) The methodology of the FAO study: “Global Food Losses and Food Waste - extent, causes and prevention”—FAO, 2011. SIK report No. 857. The Swedish Institute for Food and Biotechnology (SIK), Göteborg, Sweden
7. Rønning SB, Pedersen ME, Kirkhus B, Rødbotten R, Lindberg D (2016) Bioaktivitet av peptid-fraksjoner fra restråstoff-fremstilling, funksjon og markedsmuligheter. Nofima report 1/2016
8. FAOSTAT (2017) <http://www.fao.org/faostat/en/> Accessed 10 Jan 2017
9. Lindberg D, Aaby K, Borge GIA, Haugen J-E, Nilsson A, Rødbotten R, Sahlstrøm S (2016) Kartlegging av restråstoff fra jordbruket. Nofima report 67/2016
10. Meeker DL, Hamilton CR (2006) An overview of the rendering industry. In: Meeker DL (ed) Essential rendering. National Renderers Association, Arlington
11. Honikel KO (2011) Composition and calories. In: Nolle LML, Toldra F (eds) Handbook of analysis of edible animal by-products. CRC Press, Boca Raton
12. EU (2004) European Union Regulation (EC) No. 853/2004 of the European Parliament and of the Council of 29 April 2004 laying down specific hygiene rules for food of animal origin. Off. J. L 139, 30/4/2004

13. EU (2009) European Union Regulation (EC) No. 1069/2009 of the European Parliament and of the Council of 21 October 2009 laying down health rules as regards animal by-products and derived products not intended for human consumption and repealing Regulation (EC) No. 1774/2002 (Animal by-products Regulation). Off. J. L300,14/11/2009
14. EU (2011) European Union Regulation (EC) No. 142/2011 of 25 February 2011 implementing Regulation (EC) No. 1069/2009 of the European Parliament and of the Council laying down health rules as regards animal by-products and derived products not intended for human consumption and implementing Council Directive 97/78/EC as regards certain samples and items exempt from veterinary checks at the border under that Directive. Off. J. L54, 26/02/2011
15. EU (2001) European Union Regulation (EC) No. 999/2001 of the European Parliament and of the Council of 22 May 2001 laying down rules for the prevention, control and eradication of certain transmissible spongiform encephalopathies. Off. J. L147, 31/05/2001
16. Nygård H (2010) Standard Norwegian fishmeal- and fishoil process. Heat treatment requirements. Nofima report 33/2010
17. Sohaib M, Anjum FM, Arshad MS, Rahman UU (2016) Postharvest intervention technologies for safety enhancement of meat and meat based products; a critical review. J Food Sci Technol 53:19–30
18. Brocklehurst TF (2007) The importance of microbiological risk management in the stabilisation of food processing co-product. In: Waldron K (ed) Handbook of waste management and co-product recovery in food processing, 1st edn. Woodhead, Cambridge
19. Gonçalves AA (2016) Ozone as a safe and environmentally friendly tool for the seafood industry. J Aquat Food Prod Technol 25:210–229
20. Campos CA, Losada V, Rodríguez Ó, Aubourg SP, Barros-Velázquez J (2006) Evaluation of an ozone–slurry ice combined refrigeration system for the storage of farmed turbot (*Psetta maxima*). Food Chem 97:223–230
21. Sorheim O, Uglem S, Lea P, Claus JR, Egelanddal B (2006) Functional properties of pre-rigor, pre-salted ground beef chilled with solid carbon dioxide. Meat Sci 73:459–466
22. Theron MM, Lues JFR (2007) Organic acids and meat preservation: a review. Food Rev Int 23:141–158
23. Carpenter CE, Broadbent JR (2009) External concentration of organic acid anions and pH: key independent variables for studying how organic acids inhibit growth of bacteria in mildly acidic foods. J Food Sci 74:R12–R15
24. Tatterson IN, Windsor ML (2001) Fish Silage. Torry Advisory Note No. 64, Food and Agriculture Organization of the United Nations, Rome
25. De Arruda LF, Borghesi R, Oetterer M (2007) Use of fish waste as silage. A review. Braz Arch Biol Technol 50:879–886
26. Raa J, Gildberg A (1982) Fish silage. A review. Crit Rev Food Sci Nutr 16:383–419
27. Rathinaraj K, Sakhare PZ, Sachindra NM, Mahendrakar NS (2010) Effect of ensilaging and organic solvent treatment on activity of proteases from chicken intestine. Food Bioprocess Technol 3:783–788
28. Thongthai C, Gildberg A (2005) Asian fish sauce as a source of nutrition. In: Shi J, Ho C-T, Shahidi F (eds) Asian Functional Foods. CRC Press, Boca Raton
29. Gildberg A (2004) Digestive enzyme activities in starved pre-slaughter farmed and wild-captured, Atlantic cod (*Gadus morhua*). Aquaculture 238:343–353
30. Schmidtsdorff W (1995) Fish meal and fish oil—not only by-products. In: Ruiter A (ed) Fish and fishery products: composition, nutritive properties and stability. CAB International, Wallingford
31. Oterhals Å, Vogt G (2013) Impact of extraction, refining and concentration stages on the stability of fish oil. In: Jacobsen C, Nielsen NS, Horn AF, Sørensen ADM (eds) Food enrichment with omega-3 fatty acids, 1st edn. Woodhead, Cambridge
32. Bimbo AP (2017) Marine Oils. International Fisheries Technology, Virginia <http://lipidlibrary.aocs.org/OilsFats/content.cfm?ItemNumber=40332>. Accessed 10 Jan 2017
33. Aaslyng MD, Martens M, Poll L, Nielsen PM, Flyge H, Larsen LM (1998) Chemical and sensory characterization of hydrolyzed vegetable protein, a savory flavoring. J Agric Food Chem 46:481–489
34. Manley CH, McCann JS, Swaine RL Jr (1981) The chemical bases of the taste and flavor enhancing properties of hydrolyzed protein. In: Charalambous G (ed) The quality of foods and beverages. Academic, Cambridge

35. Friedman M (1978) Inhibition of lysinoalanine synthesis by protein acylation. In: Friedman M (ed) Nutritional improvement of food and feed proteins. Springer, Boston
36. Kristinsson HG, Rasco BA (2000) Fish protein hydrolysates: production, biochemical, and functional properties. *Crit Rev Food Sci* 40:43–81
37. Pasupuleti VK, Braun S (2010) State of the art manufacturing of protein hydrolysates. In: Pasupuleti VK, Demain AL (eds) Protein hydrolysates in biotechnology. Springer, Dordrecht
38. Panyam D, Kilara A (1996) Enhancing the functionality of food proteins by enzymatic modification. *Trends Food Sci Technol* 7:120–125
39. O'Meara GM, Munro PA (1984) Effects of reaction variables on the hydrolysis of lean beef tissue by alcalase. *Meat Sci* 11:227–238
40. Moreno MCM, Cuadrado VF (1993) Enzymatic hydrolysis of vegetable proteins—mechanism and kinetics. *Process Biochem* 28:481–490
41. Adler-Nissen J (1986) Enzymatic hydrolysis of food proteins. Elsevier Applied Science, Essex
42. Hjelmeland K (1983) Proteinase inhibitors in the muscle and serum of cod (*Gadhus morhua*). Isolation and characterization. *Comp Biochem Phys B* 76:365–372
43. Aspevik T, Egede-Nissen H, Oterhals Å (2016) A systematic approach to the comparison of cost efficiency of endopeptidases for the hydrolysis of Atlantic salmon (*Salmo salar*) by-products. *Food Technol Biotechnol* 54:421–431
44. Linder M, Fanni J, Parmentier M, Sergent M, Phantanluu R (1995) Protein recovery from veal bones by enzymatic hydrolysis. *J Food Sci* 60:949–952
45. Rao MB, Tanksale AM, Ghatge MS, Deshpande VV (1998) Molecular and biotechnological aspects of microbial proteases. *Microbiol Mol Biol R* 62:597–635
46. Kristinsson HG (2007) Aquatic food protein hydrolysates. In: Shahidi F (ed) Maximising the value of marine by-products. Woodhead, Cambridge
47. Kunst T (2003) Protein modification to optimize functionality. In: Whitaker JR, Voragen AGJ, Wong DWS (eds) Handbook of food enzymology. Marcel Dekker, New York
48. Sriperum N, Pesti GM, Tillman PB (2011) Evaluation of the fixed nitrogen-to-protein (N:P) conversion factor (6.25) versus ingredient specific N:P conversion factors in feedstuffs. *J Sci Food Agric* 91:1182–1186
49. Afseth NK, Wold JP, Segtnan VH (2006) The potential of Raman spectroscopy for characterisation of the fatty acid unsaturation of salmon. *Anal Chim Acta* 572:85–92
50. Wold JP, O'Farrell M, Hoy M, Tschudi J (2011) On-line determination and control of fat content in batches of beef trimmings by NIR imaging spectroscopy. *Meat Sci* 89:317–324
51. Ruckebusch C, Nedjar-Arroume N, Magazzeni S, Huvenne J-P, Legrand P (1999) Hydrolysis of haemoglobin surveyed by infrared spectroscopy: I. solvent effect on the secondary structure of haemoglobin. *J Mol Struct* 478:185–191
52. Poulsen NA, Eskildsen CE, Akkerman M, Johansen LB, Hansen MS, Hansen PW, Skov T, Larsen LB (2016) Predicting hydrolysis of whey protein by mid-infrared spectroscopy. *Int Dairy J* 61:44–50
53. Bougatef A, Nedjar-Arroume N, Manni L, Ravallec R, Barkia A, Guillochon D, Nasri M (2010) Purification and identification of novel antioxidant peptides from enzymatic hydrolysates of sardinelle (*Sardinella aurita*) by-products proteins. *Food Chem* 118:559–565
54. Hewitt C, Nienow AW (2007) The scale-up of microbial batch and fed-batch fermentation processes. *Adv Appl Microbiol* 62:105–135
55. Neubauer P, Cruz N, Glauche F, Junne S, Knepper A, Raven M (2013) Consistent development of bioprocesses from microliter cultures to the industrial scale. *Eng Life Sci* 13:224–238
56. Hellsmark H, Frishammar J, Söderholm P, Ylinenpää H (2016) The role of pilot and demonstration plants in technology development and innovation policy. *Res Policy* 45:1743–1761
57. Olsen RL, Toppe J, Karunasagar I (2014) Challenges and realistic opportunities in the use of by-products from processing of fish and shellfish. *Trends Food Sci Technol* 36:144–151
58. Silva VDM, Silvestre MPC (2003) Functional properties of bovine blood plasma intended for use as a functional ingredient in human food. *Lebensm Wiss Technol Food Sci Technol* 36:709–718
59. Jayathilakan K, Sultana K, Radhakrishna K, Bawa AS (2012) Utilization of byproducts and waste materials from meat, poultry and fish processing industries: a review. *J Food Sci Technol* 49:278–293
60. FAO (1991) Guidelines for slaughtering, meat cutting and further processing. FAO Animal Production and Health Papers 91. Food and Agriculture Organization of the United Nations, Rome

61. Siemensma AD, Weijer WJ, Bak HJ (1993) The importance of peptide lengths in hypoallergenic infant formulas. *Trends Food Sci Technol* 4:16–21
62. Frøkjær S (1994) Use of hydrolysates for protein supplementation. *Food Technol* 48:86–88
63. Clemente A (2000) Enzymatic protein hydrolysates in human nutrition. *Trends Food Sci Technol* 11:254–262
64. Neklyudov AD, Ivankin AN, Berdutina AV (2000) Properties and uses of protein hydrolysates. *Appl Biochem Microbiol* 36:452–459
65. Kim H-O, Li-Chan ECY (2006) Quantitative structure–activity relationship study of bitter peptides. *J Agric Food Chem* 54:10102–10111
66. Aspevik T, Totland C, Lea P, Oterhals Å (2016) Sensory and surface-active properties of protein hydrolysates based on Atlantic salmon (*Salmo salar*) by-products. *Process Biochem* 51:1006–1014
67. Saha BC, Hayashi K (2001) Debitting of protein hydrolysates. *Biotechnol Adv* 19:355–370
68. Aspevik T (2016) Fish protein hydrolysates based on Atlantic salmon by-products—enzyme cost-efficiency and characterization of sensory, surface-active and nutritional properties, PhD thesis. University of Bergen
69. Wadhwa M, Bakshi MPS (2016) Application of waste-derived proteins in the animal feed industry. In: Dhillon G (ed) *Protein byproducts*. Academic, Cambridge
70. Hendriks WH, Butts CA, Thomas DV, James KAC, Morel PCA, Verstegen MWA (2002) Nutritional quality and variation of meat and bone meal. *Asian Australas J Anim Sci* 15:1507–1516
71. Pérez-Calvo E, Castrillo C, Baucells MD, Guada JA (2010) Effect of rendering on protein and fat quality of animal by-products. *J Anim Physiol Anim Nutr* 94:e154–e163
72. Martínez-Alvarez O, Chamorro S, Brenes A (2015) Protein hydrolysates from animal processing by-products as a source of bioactive molecules with interest in animal feeding: a review. *Food Res Int* 73:204–212
73. Jedrejek D, Levic J, Wallace J, Oleszek W (2016) Animal by-products for feed: characteristics, European regulatory framework, and potential impacts on human and animal health and the environment. *J Anim Feed Sci* 25:189–202
74. Ytrestøl T, Aas TS, Asgard T (2015) Utilisation of feed resources in production of Atlantic salmon (*Salmo salar*) in Norway. *Aquaculture* 448:365–374
75. Shepherd CJ, Jackson AJ (2013) Global fishmeal and fish-oil supply: inputs, outputs and markets. *J Fish Biol* 83:1046–1066
76. EU (2012) European commission, Health and Consumer Directorate General. Summary report of the standing committee on the food chain and animal health held in Brussels on 18 July 2012 (Section Biological Safety of the Food Chain). http://ec.europa.eu/food/committees/regulatory/scfcah/biosafety/sum_18072012_en.pdf. Accessed 16 Jan 2017
77. Hatlen B, Jakobsen JV, Crampton V, Alm M, Langmyhr E, Espe M, Hevrøy EM, Torstensen BE, Liland NS, Waagbø R (2015) Growth, feed utilization and endocrine responses in Atlantic salmon (*Salmo salar*) fed diets added poultry by-product meal and blood meal in combination with poultry oil. *Aquac Nutr* 21:714–725
78. Liland NS, Hatlen B, Takle H, Venegas C, Espe M, Torstensen BE, Waagbø R (2015) Including processed poultry and porcine by-products in diets high in plant ingredients reduced liver TAG in Atlantic salmon, *Salmo salar* L. *Aquac Nutr* 21:655–669
79. Sola-Oriol D, Roura E, Torrallardona D (2011) Feed preference in pigs: effect of selected protein, fat, and fiber sources at different inclusion rates. *J Anim Sci* 89:3219–3227
80. Swanson KS, Carter RA, Yount TP, Aretz J, Buff PR (2013) Nutritional sustainability of pet foods. *Adv Nutr* 4:141–150
81. Barbut S (2015) The science of poultry and meat processing. Creative commons. <http://www.poultryandmeatprocessing.com/>. Accessed 12 Jan 2017
82. Aldrich G (2006) Rendered products in pet food. In: Meeker DL (ed) *Essential rendering*. National Renderers Association, Arlington
83. Folador JF, Karr-Lilienthal LK, Parsons CM, Bauer LL, Utterback PL, Schasteen CS, Bechtel PJ, Fahey GC Jr (2006) Fish meals, fish components, and fish protein hydrolysates as potential ingredients in pet foods. *J Anim Sci* 84:2752–2765
84. Nagodawithana TW, Nelles L, Trivedi NB (2010) Protein hydrolysates as hypoallergenic, flavors and palatants for companion animals. In: Pasupuleti VK, Demain AL (eds) *Protein hydrolysates in biotechnology*. Springer, Dordrecht
85. Fitzgerald RJ, Murray BA (2006) Bioactive peptides and lactic fermentations. *Int J Dairy Technol* 59:118–125

86. da Rosa Zavareze E, Telles AC, Mello El Halal SL, da Rocha M, Colussi R, Marques de Assis L, Suita de Castro LA, Guerra Dias AR, Prentice-Hernández C (2014) Production and characterization of encapsulated antioxidative protein hydrolysates from Whitemouth croaker (*Micropogonias furnieri*) muscle and byproduct. *Food Sci Technol* 59:841–848
87. Harnedy PA, FitzGerald RJ (2012) Bioactive peptides from marine processing waste and shellfish: a review. *J Funct Foods* 4:6–24
88. Lafarga T, Hayes M (2014) Bioactive peptides from meat muscle and by-products: generation, functionality and application as functional ingredients. *Meat Sci* 98:227–239
89. Liaset B, Madsen L, Hao Q, Criales G, Mellgren G, Marschall HU, Hallenborg P, Espe M, Froyland L, Kristiansen K (2009) Fish protein hydrolysate elevates plasma bile acids and reduces visceral adipose tissue mass in rats. *Biochim Biophys Acta* 1791:254–262
90. Zdzieblak D, Oesser S, Baumstark MW, Gollhofer A, König D (2015) Collagen peptide supplementation in combination with resistance training improves body composition and increases muscle strength in elderly sarcopenic men: a randomised controlled trial. *Br J Nutr* 114:1237–1245
91. Husein El Hadmed H, Castillo RF (2016) Cosmeceuticals: peptides, proteins, and growth factors. *J Cosmet Dermatol* 15:514–519
92. Raghavan S, Kristinsson HG (2009) ACE-inhibitory activity of tilapia protein hydrolysates. *Food Chem* 117:582–588
93. Di Bernardini R, Harnedy P, Bolton D, Kerry J, O'Neill E, Mullen AM, Hayes M (2011) Antioxidant and antimicrobial peptidic hydrolysates from muscle protein sources and by-products. *Food Chem* 124:1296–1307
94. Je J-Y, Park P-J, Kim S-K (2005) Antioxidant activity of a peptide isolated from Alaska pollack (*Theragra chalcogramma*) frame protein hydrolysate. *Food Res Int* 38:45–50
95. Onuh JO, Girgih AT, Aluko RE, Aliani M (2014) In vitro antioxidant properties of chicken skin enzymatic protein hydrolysates and membrane fractions. *Food Chem* 150:366–373
96. Pasupuleti VK (2010) Applications of protein hydrolysates in biotechnology. In: Pasupuleti VK, Demain AL (eds) *Protein hydrolysates in biotechnology*. Springer, Dordrecht
97. Bah CS, Bekhit Ael D, Carne A, McConnell MA (2016) Composition and biological activities of slaughterhouse blood from red deer, sheep, pig and cattle. *J Sci Food Agric* 96:79–89
98. Reddy N (2015) Non-food industrial applications of poultry feathers. *Waste Manag* 45:91–107
99. Woodgate SL (2006) What would a world without rendering look like? In: Meeker DL (ed) *Essential rendering*. National Renderers Association, Arlington
100. Troy DJ, Kerry JP (2010) Consumer perception and the role of science in the meat industry. *Meat Sci* 86:214–226
101. Djekic I, Tomasevic I (2016) Environmental impacts of the meat chain—current status and future perspectives. *Trends Food Sci Technol* 54:94–102
102. Penven A, Perez-Galvez R, Berge J-P (2013) By-products from fish processing: focus on French industry. In: Perez-Galvez R, Berge J-P (eds) *Utilization of fish waste*, CRC Press, Boca Raton, pp 1–25. ISBN: 9781466585799
103. Smith ST, Metzger L, Drake MA (2016) Evaluation of whey, milk, and delactosed permeates as salt substitutes. *J Dairy Sci* 99:8687–8698
104. Chardigny J-M, Walrand S (2016) Plant protein for food: opportunities and bottlenecks. *OCL* 23:D404
105. Nunes MA, Pimentel FB, Costa ASG, Alves RC, Oliveira MBPP (2016) Olive by-products for functional and food applications: challenging opportunities to face environmental constraints. *Innov Food Sci Emerg Technol* 35:139–148
106. Dijksterhuis G (2016) New product failure: five potential sources discussed. *Trends Food Sci Technol* 50:243–248
107. Young W, Hwang K, McDonald S, Oates CJ (2010) Sustainable consumption: green consumer behaviour when purchasing products. *Sustain Dev* 18:20–31
108. Amofa-Diatuo T, Anang DM, Barba FJ, Tiwari BK J. Development of new apple beverages rich in isothiocyanates by using extracts obtained from ultrasound-treated cauliflower by-products: Evaluation of physical properties and consumer acceptance. *Food Compos Anal*. doi:10.1016/j.jfca.2016.10.001
109. Childs JL, Drake M (2010) Consumer perception of astringency in clear acidic whey protein beverages. *J Food Sci* 75:S513–S521
110. Verbeke W (2005) Agriculture and the food industry in the information age. *Eur Rev Agric Econ* 32:347–368

111. Dickinson A, MacKay D, Wong A (2015) Consumer attitudes about the role of multivitamins and other dietary supplements: report of a survey. *Nutr J* 14:66–70
112. Bornkessel S, Bröring S, Omta SO, van Trijp H (2014) What determines ingredient awareness of consumers? A study on ten functional food ingredients. *Food Qual Prefer* 32:330–339
113. Van Rijswijk W, Frewer LJ (2012) Consumer needs and requirements for food and ingredient traceability information. *Int J Consum Stud* 36:282–290
114. Shepherd CJ, Monroig O, Tocher DR (2017) Future availability of raw materials for salmon feeds and supply chain implications: the case of Scottish farmed salmon. *Aquaculture* 467:49–62
115. Abarike ED, Obodai EA, Attipoe FYK (2016) Effects of feeding different agro-industrial by-products on carcass composition and sensory attributes of *Oreochromis niloticus*. *Int J Fish Aquat Stud* 4:168–172
116. Aschemann-Witzel J (2015) Consumer perception and trends about health and sustainability: trade-offs and synergies of two pivotal issues. *Curr Opin Food Sci* 3:6–10
117. Helkar PB, Sahoo AK, Patil NJ (2016) Review: food industry by-products used as a functional food ingredients. *Int J Waste Resources* 6:248–253
118. Pinotti L, Krogdahl A, Givens I, Knight C, Baldi A, Baeten V, Van Raamsdonk L, Woodgate S, Marin DP, Luten J (2014) The role of animal nutrition in designing optimal foods of animal origin as reviewed by the COST Action Feed for Health (FA0802). *Biotechnol Agron Soc* 18:471–479
119. Mintel (2014) Protein fever. <http://www.mintel.com/en/pdf/Protein-whitepaper-Mintel.pdf> Accessed 12 Jan 2017
120. Mintel (2016) Consumer trends 2017. <http://www.mintel.com/european-consumer-trends>. Accessed 12 Jan 2017



Integration of Waste Valorization for Sustainable Production of Chemicals and Materials via Algal Cultivation

Yong Chen^{1,2,3} · Li-ping Sun^{1,2,3} · Zhi-hui Liu^{1,2,3} · Greg Martin⁴ · Zheng Sun^{1,2,3} 

Received: 13 September 2017 / Accepted: 20 October 2017 / Published online: 27 November 2017
© Springer International Publishing AG 2017

Abstract Managing waste is an increasing problem globally. Microalgae have the potential to help remove contaminants from a range of waste streams and convert them into useful biomass. This article presents a critical review of recent technological developments in the production of chemicals and other materials from microalgae grown using different types of waste. A range of novel approaches are examined for efficiently capturing CO₂ in flue gas via photosynthetic microalgal cultivation. Strategies for using microalgae to assimilate nitrogen, organic carbon, phosphorus, and metal ions from wastewater are considered in relation to modes of production. Generally, more economical open cultivation systems such as raceway ponds are better suited for waste conversion than more expensive closed photobioreactor systems, which might have use for higher-value products. The effect of cultivation methods and the properties of the waste streams on the composition the microalgal biomass is discussed relative to its utilization. Possibilities include the production of biodiesel via lipid extraction, biocrude from hydrothermal

Chapter 6 was originally published as Chen, Y., Sun, L., Liu, Z., Martin, G. & Sun, Z. Top Curr Chem (Z) (2017) 375: 89. <https://doi.org/10.1007/s41061-017-0175-y>.

Yong Chen, Li-ping Sun and Zhi-hui Liu equally contributed to this work.

✉ Zheng Sun
zsun@shou.edu.cn

- ¹ International Research Center for Marine Biosciences, Ministry of Science and Technology, Shanghai Ocean University, Shanghai 201306, China
- ² Key Laboratory of Exploration and Utilization of Aquatic Genetic Resources, Ministry of Education, Shanghai Ocean University, Shanghai 201306, China
- ³ National Demonstration Center for Experimental Fisheries Science Education, Shanghai Ocean University, Shanghai 201306, China
- ⁴ Department of Chemical and Biomolecular Engineering, University of Melbourne, Melbourne, VIC 3010, Australia

liquefaction, and bioethanol or biogas from microbial conversion. Microalgal biomass produced from wastes may also find use in higher-value applications including protein feeds or for the production of bioactive compounds such as astaxanthin or omega-3 fatty acids. However, for some waste streams, further consideration of how to manage potential microbial and chemical contaminants is needed for food or health applications. The use of microalgae for waste valorization holds promise. Widespread implementation of the available technologies will likely follow from further improvements to reduce costs, as well as the increasing pressure to effectively manage waste.

Keywords Biomass utilization · Metabolic pathways · Culture systems · Bioenergy · By-products

1 Introduction

Industrial development and intensified agricultural production have given rise to serious pollution problems from waste gas, wastewater, and solid waste. In general, waste gas is discharged directly into the atmosphere, and this large amount of untreated gas exacerbates global warming. It is well known that the main cause of global climate change is the uncontrolled discharge of greenhouse gas, which is largely the result of human activity and industrial production [1]. CO₂, an important component of waste gas pollution, is derived from the burning of fossil fuels and solid waste [2, 3]. Excess nutrients (such as nitrogen and phosphorus) in wastewater can lead to eutrophication and ecological imbalance [4]. The direct damage from eutrophication includes three main aspects: (1) reduced biodiversity, such as the loss of dominant species; (2) damage to the water environment, such as increased toxicity; and (3) changes in the physical properties of water, such as increased turbidity. According to Dodds et al. [5], the economic cost of water eutrophication in the United States is approximately \$2.2 billion per year. At the same time, an outbreak of cyanobacteria will indirectly affect the health of residents in proximity to the affected water, and hinder the development of tourism [6]. Heavy metal pollution from wastewater is also a serious concern. For example, the total amount of wastewater discharged from China increased from 65.9 billion tons to 73.5 billion tons between 2011 and 2015. The emissions of phosphorus and nitrogen in the wastewater remained constant, while heavy metal components (e.g. Cr, As, Pb, Hg) increased each year (Fig. 1). Food waste is considered the most important category of solid waste. In Hong Kong, for example, food waste accounts for about 36–40% of municipal solid waste [7]. In daily life, this waste produces odor or mildew, further threatening sanitation and health. In addition, as Hartmann and Ahring [8] pointed out, soil-buried food wastes are an important source of greenhouse gas emissions. Landfill gas is mainly produced by the degradation of organic waste, and is composed primarily of methane (40–70% by dry volume). Methane has a thermal effect 20 to 25 times that of CO₂, further exacerbating the greenhouse effect [9].

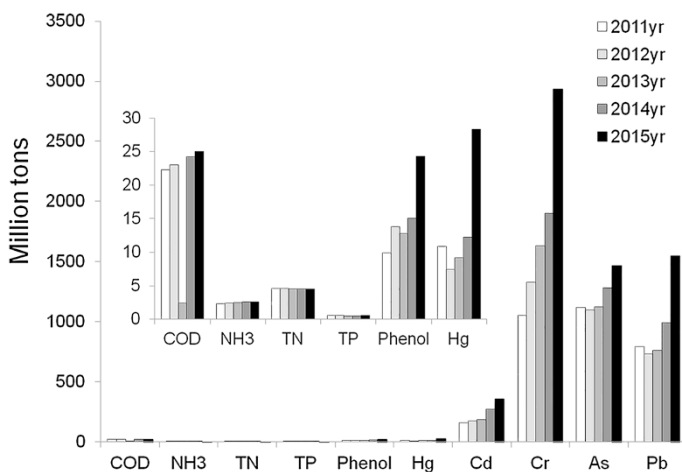


Fig. 1 Wastewater composition in China 2011–2015

Traditional waste disposal methods largely comprise physical and chemical processes such as burial, filtration, sedimentation, and anaerobic fermentation. Compared to these methods, algae, and especially microalgae, have shown advantages in the efficient absorption of gaseous substances (such as CO_2) from waste gas, or the removal of nitrogen, phosphorus, and toxic metal components from wastewater [10, 11]. The use of algae to treat sewage can overcome adverse effects such as secondary pollution, potential nutrient loss, or suboptimal water use caused by traditional waste disposal methods. At the same time, microalgae can effectively clean water by removing eutrophic nitrogen, phosphorus, and other nutrients [12]. Nitrogen that is removed from wastewater by bacterial nitrification/denitrification alone is released in the form of nitrogen gas, whereas algae treatment can effectively deposit nitrogen in useful biomass. The economic viability of algae culture depends on the cost of the water source and the fertilizer and organic carbon used [13]. The use of microalgae culture strategies to make use of waste for the production of useful chemical and material products helps to reduce costs and promote environmentally sustainable development. For example, sugar, protein, oil, and fatty acids contained within the algal biomass can be used as raw materials for chemicals, materials, and energy alternatives [14]. In particular, the oil from microalgae can be converted into biodiesel via transesterification, and fatty acids can be converted into synthetic plasticizers [15, 16], surfactants [17], or other chemical products [18]. Starch can be a sugar platform for fermentation [19] or hydrolyzed to produce polyols [20]. In this paper, we first summarize different types of waste, considering the means by which microalgae can absorb, metabolize, and transform this waste to promote their own growth. Second, we explore different cultivation methods/systems and the effects of microalgae on waste purification. Finally, we discuss the prospect of bioenergy.

2 Waste and Nutrient Sources for Algal Growth

Of the many sources of waste, microalgae are most suitable for treating large point-sources of flue gas, wastewater, or organic waste. This section will describe how microalgae use these three types of waste as resources for their growth.

2.1 Flue Gas as Carbon Dioxide Feedstock

Much of the global CO_2 emissions from flue gas are discharged directly into the atmosphere [1, 21]. The use of flue gas as an inorganic carbon source can promote algal growth, diverting the release of CO_2 into useful biomass. Photosynthetic growth of microalgae can be significantly enhanced by the addition of flue gas to the culture medium [22]. The provision of CO_2 means the growth is not limited by carbon availability (as it is if relying solely on atmospheric CO_2), allowing full utilization of the solar energy resource. The overall process involves the chemical reduction of CO_2 via the Calvin–Benson cycle, to produce organic carbon that can be used for cellular biosynthesis. This is an energy-intensive process that is fueled by photosynthesis. The mechanisms of CO_2 assimilation and utilization in microalgae are complex. As shown in Fig. 2, CO_2 in the flue gas dissolves in the liquid growth medium as CO_2 molecules, carbonates, or bicarbonate ions. CO_2 molecules are able to cross the cell membrane through free diffusion, whereas carbonates and bicarbonates are a class of charged ions that must be actively transported into the cell. Carbonic anhydrase located in the chloroplast is used to produce CO_2 efficiently, which is a kind of CO_2 concentrating mechanism that

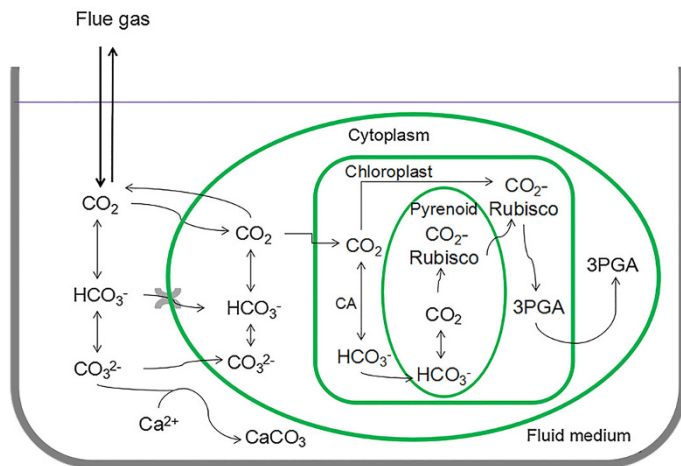


Fig. 2 Pathway of inorganic carbon uptake, conversion and storage in algae [23–25]. Carbon dioxide molecules, carbonates, or bicarbonate ions in the culture medium enter the cells in different ways. The carbonic anhydrase on the chloroplast captures carbon dioxide and binds to the RuBisCO located in the protein core via condensation to produce unstable intermediates. It is then cleaved into 2 molecules of 3-phosphoglycerate, and the resulting 3-phosphoglyceraldehyde is involved in the metabolism in cytoplasm. CA carbonic anhydrase

occurs under low CO₂ concentrations [23]. CO₂ and ribulose-1,5-bisphosphate carboxylase/oxygenase (RuBisCO) condense into unstable intermediates, and cleave into 3-phosphoglycerate; the phosphoglycerate kinase in the matrix catalyzes the transfer of phosphate groups to produce 3-phosphoglyceraldehyde, which can either be used to synthesize starch or other carbohydrates for energy storage, or be funneled directly into glycolysis to release energy for the cells [24, 25].

Many research efforts have been dedicated to investigating how to best combine algal growth with flue gas utilization. The traditional approach is to sparge CO₂ bubbles to cultures. Almashtadani et al. [26] created bubbles within the medium by using a fluidic oscillation diffuser, while Fan et al. [27] used a kind of polyvinylidene fluoride hollow fiber membrane to generate microbubbles. It is worth mentioning that with these methods, much of the CO₂ may be lost to the atmosphere. Some researchers have suggested the use of membrane reactors to minimize CO₂ loss. In this case, CO₂ was dissolved directly into the medium rather than in the form of bubbles. For example, Kim et al. [28] employed a type of polyurethane and polyethylene membranes to deliver flue gas into algal medium. However, this method cannot avoid energy waste. In a study by Nole et al. [29], CO₂ was first absorbed in a solid sorbent and then stripped into a sodium carbonate solution to produce a bicarbonate solution. A CO₂-selective membrane was subsequently used to transfer dissolved CO₂ into seawater through contact between two liquids. The seawater was ultimately used as carbon source in photoreactors. Although this approach avoided the energy demand of solvent regeneration, a series of unit operations were difficult to realize. Zheng et al. [30] proposed a novel approach: in this case, CO₂ was absorbed into a potassium carbonate solvent and the gas was desorbed into microalgal medium via a non-porous polydimethylsiloxane hollow fiber membrane. This approach dramatically reduced the cost of capture. In addition to developing delivery technologies, many studies have investigated the biological response to flue gas, including the effects of different concentrations of CO₂ and flue gas contaminants. For example, Tang et al. [31] examined the carbon utilization efficiency of *Scenedesmus obliquus* and *Chlorella pyrenoidosa* at different CO₂ concentrations (0.03–50%). At a concentration of 10%, the carbon fixation efficiencies of *Scenedesmus obliquus* and *Chlorella pyrenoidosa* were 0.288 and 0.26 g L⁻¹ day⁻¹, respectively. Yoo et al. [32] recently reported biomass yields of 0.077 and 0.203 g L⁻¹ day⁻¹ for *Botryococcus braunii* and *Scenedesmus*, respectively, cultured using 5.5% CO₂ of waste gas. However, Hauck et al. [33] found that excessive CO₂ in waste gas hindered the growth of algae. This may result from the lower pH due to the dissolution of CO₂. Concentrations of NO_x, SO₂, and other substances tended to vary in relation to the CO₂ concentrations of the flue gas (Table 1). The percentage of CO₂ was continuously measured, and the concentrations of other components in flue gas were found to be decreased to the same extent. The effects of these contaminants have been studied. Although sulfur is indispensable for algal growth, sulfur dioxide has been reported to be toxic to some microalgae [35]. It is well known that SO₂ directly interferes with CO₂ fixation (inhibition of RuBisCO by SO₃²⁻), energy metabolism (inhibition of mitochondrial ATP production by SO₃²⁻), and the formation of organic sulfonates in plants [36]. However, few mechanisms leading to toxicity have been revealed in

Table 1 Mean concentration of components in flue gas with different CO₂ concentrations [24, 34]

Components of flue gas (%)	CO ₂ concentration (%)		
	11.37	6.71	2.50
NO _x	45	26.6	9.9
SO ₂	36.1	21.3	7.9
CO	0.45	0.27	0.1
TOC	0.714	0.421	0.157
Other toxic substances ^a	4.39	2.6	0.976

^aOther toxic substances were mainly composed of HCl and Hg

microalgae. Thus far, studies on the biochemical effects of SO₂ are limited to its ability to act as a reducing or oxidizing agent. NO has been considered an important messenger in plant defense signaling against photo-inhibition and plant death. It is unclear whether NO plays a similar role in microalgae or affects algal physiological features. According to Nagase et al. [37], the lipid and starch content of microalgae exhibited no difference with and without the addition of NO. To date, no studies have elaborated the effects of NO present in flue gas on the growth of microalgae [38].

2.2 Assimilation of Nitrogen Sources from Wastewater

Wastewater comes from industrial, municipal, and agricultural sources. As shown in Table 2, the major pollutants in industrial wastewater are heavy metals and chemical oxygen demand (COD), the composition of which are complex and varied. For example, food production leads to large amounts of biodegradable organic matter, colloids, acids, and alkali salts, whereas the chemical industry produces wastewater with problematic concentrations of lead and mercury. Agricultural wastewater mainly includes fertilizer run-off including organic phosphorus and pesticide products that have strong toxicity. Municipal sewage generally includes suspended solids, organic matter, and other nutrients. After primary and secondary treatment processes, the largest amount of pollutants remaining in wastewater are nitrogen and phosphorus-based nutrients. In general, nitrogen and phosphorus (e.g. nitrates, urea, and phosphates) are common chemical elements that are widely present in the various types of wastewater environments described above.

Microalgae purify wastewater through nitrogen and phosphorus absorption and utilization. During autotrophic growth, photosynthesis removes dissolved CO₂, promoting an increase in the pH, which in turn promotes the precipitation of orthophosphate, and thus indirectly removes phosphorus. At the same time, phosphorus can also be phosphorylated into ATP, phospholipids, and other organic substances. As CO₂ is the carbon source for microalgae, nitrogen is typically the growth-limiting nutrient. It is directly absorbed by algal cells and converted into biomass components including proteins. As shown in Fig. 3, nitrogen sources such as ammonium salts, urea, and purines are largely assimilated in three ways [52–55]: (1) Nitrate and nitrite have active transport systems, and ammonium can be assimilated intracellularly [56]. (2) Urea is decomposed into bicarbonate and

Table 2 Typical chemical characteristics of industrial, municipal and agricultural wastewater

Sources	Chemical components					Heavy metals					Other toxic substances			Refs.	
	COD	TN	NH ₃ -N	TP	Al	As	Cd	Cr	Cu	Hg	Pb	Ni	Organ-phosphorus		
													Phenol		
Industrial wastewater	-	-	-	-	✓	✓	✓	-	✓	✓	✓	✓	-	-	[24, 39–42]
	-	-	-	-	✓	✓	✓	-	✓	✓	✓	✓	-	-	
	-	-	-	-	✓	✓	✓	-	✓	✓	✓	✓	-	-	
	-	-	-	-	✓	✓	✓	-	✓	✓	✓	✓	-	-	
	✓	-	✓	✓	-	-	-	✓	-	-	-	-	-	-	
Municipal wastewater	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	[43–49]
	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	
	✓	-	✓	✓	-	-	-	-	-	-	-	-	-	-	
	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	
	✓	✓	-	✓	-	✓	✓	-	-	-	✓	-	-	-	
Agricultural wastewater	✓	✓	-	✓	-	-	-	-	-	-	-	-	-	-	[50, 51]
	-	-	-	✓	-	-	-	-	-	-	-	-	-	✓	
	-	-	-	✓	-	-	-	✓	-	-	-	✓	✓	-	
	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	
	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	

✓ Detected, – undetected

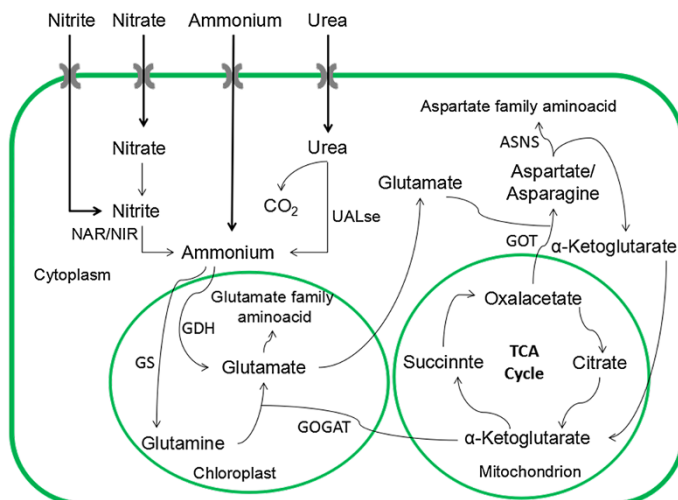


Fig. 3 Metabolism model of nitrogen sources in algae [52–55]. The ammonium salt is catalyzed by glutamate synthase in the chloroplast to produce glutamine, and synthesizes two molecules of glutamate with α -ketoglutaric acid from the endoplasmic reticulum under the catalysis of glutamate synthase. In addition, glutamate dehydrogenase directly catalyzes ammonium and α -ketoglutaric acid to generate glutamate. The glutamate from these two sources can further synthesize the glutamate family amino acid. Chloroplast-derived glutamate enters the cytoplasm, and through the catalysis of glutamic-oxaloacetic transaminase, a transamination reaction with oxaloacetic acid synthesizes aspartic acid. Powered by ATP and under the action of aspartyl synthase, this generates an aspartate family amino acid and releases α -ketoglutaric acid. *NAR* nitrate reductase, *NIR* nitrite reductase, *UALse* urease and urea carboxylase, *GS* glutamine synthetase, *GOGAT* glutamate synthase, *GDH* glutamate dehydrogenase, *GOT* glutamic oxalacetic transaminase, *ASNS* asparagine synthetase

ammonium salts [55]. (3) Ammonium salts in the external environment can cross cellular membranes via a group of transporters (belonging to the ammonium transporter family). In the chloroplast, the ammonium salts are converted to glutamine and combined with α -ketoglutaric acid to form two molecules of glutamate (GS/GOGAT pathway) [57, 58]. In addition, under the catalysis of glutamate dehydrogenase, glutamate can be obtained from ammonium and α -ketoglutaric acid (GDH pathway) [59]. Through the GS/GOGAT or GDH pathway, ammonium is incorporated into glutamate and reacts with oxaloacetate to produce aspartic acid, and is further transformed into asparagine. The resulting glutamine, glutamate, aspartate, and asparagine provide a material basis for the synthesis of intracellular organic nitrogen (proteins, nucleic acids, and chlorophyll).

Microalgae also adsorb heavy metals through complex reactions or ion exchange. The metal cations in wastewater can be in complexes with negatively charged functional groups in proteins, lipids, and polysaccharides in the cell, such as $-\text{COOH}$, R-SH , and phosphates (Table 3). In addition, some metal cations in wastewater replace protons on the cell walls of algae, while the remainder of the metal ions adsorb on the cell wall surface by electrostatic attraction or coordinate bonding. Studies have shown that alginate and sulfates in polysaccharides have a significant ion exchange capacity [72]. The use of active immobilized microalgae

Table 3 Functional groups combined with heavy metals in algae

Heavy metals	Strains	Functional groups	Refs.
Cu	<i>Chlorella vulgaris</i>	–COOH	[60]
	<i>Cladophora fascicularis</i>	–COOH, –NH ₂ , –OH	[61]
	<i>Sargassum</i> sp.	–COOH, –NH ₂ , –OH	[62]
Cr	<i>Chlamydomonas reinhardtii</i>	–COOH, –NH ₂ , –OH	[63]
	<i>Sargassum</i> sp.	–COOH, –SO ₃ H, –NH ₂ , –OH	[64]
Pb	<i>Spirogyra</i> sp.	–COOH, –NH ₂ , –OH	[65]
	<i>Spirulina maxima</i>	–NH ₂ , –OH	[66]
Cd	<i>Sargassum fluitans</i>	–COOH	[67]
	<i>Spirulina</i> sp.	–COOH, –P ₂ O ₃	[68]
Zn	<i>Ulva fasciata</i> sp.	–COOH	[69]
Al	<i>Padina pavonica</i>	–COOH, –NH ₂ , –OH	[70]
Ni	<i>Chlorella vulgaris</i>	–COOH	[71]

can bind a large part of metals to live or dead cellular surfaces, which is further desorbed by acid treatment. On the other hand, the absorbed heavy metals are stored in different cytoplasmic structures of microalgae, and the trace amounts of essential heavy metals participate as co-factors in enzymatic processes in microalgal cells [38]. Although microalgae have shown high uptake capacity and were able to detoxify various heavy metals at lower concentrations [73], higher concentrations of heavy metals are still toxic [74]. For example, Douskova et al. [75] found that mercury from untreated flue gas was detrimental to microalgae. When the concentration of Cu²⁺ rose to 2 mg L^{−1}, it even inhibited the waste removal capability and growth of *Chlorella sorokiniana* [76].

2.3 Metabolism of Glucose from Food Waste

Food waste is defined as products from the production, processing, wholesale, and consumption of food [77], and consists primarily of oil, sugar, protein, vitamins, and phosphates (Table 4). The content of carbohydrates, protein, and oil is typically in the range of 30–60%, 10–20%, and 10–35%, respectively. Macromolecular organic matter food waste can undergo a series of degradation processes. Complex cellulose and starch can be decomposed into glucose or glucose oligomers. Proteins and lipids can be degraded into peptides, amino acids, and fatty acids. These small organic substances can eventually dissociate into inorganic forms of nitrogen and phosphorus. These highly degraded forms of food waste can then potentially be utilized by microalgae. For example, Gao et al. [86] reported that heterotrophic cultures of *Chlorella protothecoides* grown with enzymatic hydrolysates of sweet sorghum juice yielded dry cell weight and lipid content of 5.1 g L^{−1} and 52.5%, respectively, which are higher than those using glucose as a carbon source. A similar study was reported by Li et al. [87], in which *Chlorella pyrenoidosa*

Table 4 Gross composition of various types of food waste

Sources	Typical composition of food waste (w/w %)						Refs.
	Carbohydrates	Lipids	Protein	Total nitrogen	Phosphate	Total fatty acids	
Dried meal from food waste	33.5–62	19–35.2	7.1–17	1.25–2.98	1.5–1.7	–	[78]
Bread waste	59.8	–	8.9	1.56	Trace	–	[79]
Bakery waste	62	19	4.2	0.76	1.5	11.5	[80]
Canteen waste	42.7	6.2–6.7	10.5–11.2	–	1.6	–	[81, 82]
Wheat flour	71.8–73.15	–	10.7–11.2	1.83	0.158–0.24	–	[83, 84]
Molasses	48–58	–	–	0.2–2.8	0.02–0.07	–	[85]

– Undetected

cultivated under light intensity of $40 \mu\text{mol (m}^2\text{s)}^{-1}$ with rice straw hydrolysates also exhibited rapid growth and high oil content. Therefore, organic waste may be considered a potential nutrient source for microalgal cultures.

Glucose is the most commonly used organic carbon source in heterotrophic or mixotrophic regimes. As shown in Fig. 4, uptake of extracellular glucose is driven by a specific transporter to facilitate diffusion or synergistic transmembrane entry into the cells. Through phosphorylation of glucose, glucose-6-phosphate is formed and is then catalyzed by a series of mutase and dehydrogenase reactions to produce two molecules of pyruvate. Synthesized pyruvate enters the mitochondria to participate in the tricarboxylic acid (TCA) cycle: pyruvate is assembled and combined into acetyl coenzyme A, and the coenzyme complex provides oxaloacetic acid with two carbon atoms to form citric acid. The citric acid becomes isocitric acid through isomerization, and then undergoes oxidized decarboxylation to form α -ketoglutaric acid. It is subjected to further oxidative decarboxylation to become succinic acid, and is then converted to form oxaloacetic acid. The TCA cycle is the central hub of biological metabolism, and produces intermediate products that can be used as sources for other biosynthetic reactions. For example, citric acid can be converted into fatty acids or cholesterol, and α -ketoglutarate and oxaloacetic acid can be involved in amino acid biosynthesis [55, 88].

Compared to autotrophic algae, heterotrophic algae are more likely to metabolize glucose through the pentose phosphate pathway (PPP) [13, 89]. The PPP is thought to be an important mechanism for the decomposition of glucose. As shown in Reaction Scheme (1), glucose-6-phosphate is hydrolyzed and dehydrogenated to ribulose-5-phosphate. Ribulose-5-phosphate then forms xylulose-5-phosphate by epimerase, and glucose-6-phosphate can be regenerated by trans-ketone and trans-aldehyde. Ribose-5-phosphate is converted to pyruvate. Glycerol aldehyde-3-phosphate and fructose-6-phosphate, an intermediate produced by the PPP, enters the glycolytic pathway and serves as a link to the glycolysis pathway.


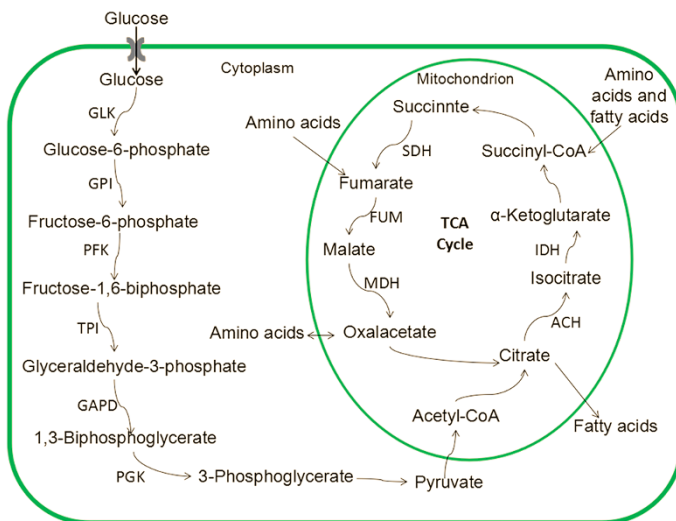


Fig. 4 Assimilation of glucose in algal cells [55, 88]. Glucose is phosphorylated to glucose-6-phosphate at position 6; phosphoglucose isomerase is catalyzed to fructose-6-phosphate, and is further phosphorylated to fructose 1,6-diphosphate. This substance is cleaved into one molecule of dihydroxyacetone phosphoric acid (dihydroxyacetone phosphoric acid can be converted to glyceraldehyde-3-phosphate) and one molecule of glyceraldehyde-3-phosphate. The resulting glyceraldehyde-3-phosphate is oxidized to 3-phosphoglycerate and then to 2-phosphoglycerate. Dehydrated under the action of enolase to produce phosphoenolpyruvate, it is finally converted to pyruvate and produces an ATP. Pyruvate is then oxidized in the mitochondria and involved in the citric acid cycle. *GLK* glucokinase, *GPI* glucose phosphate isomerase, *PFK* phosphofructokinase, *TPI* triose phosphofructokinase, *GAPD* glyceraldehyde phosphate dehydrogenase, *PGK* phosphoglycerate kinase, *ACH* aconitate hydratase, *IDH* isocitrate dehydrogenase, *SDH* succinate dehydrogenase, *FUM* fumarate hydratase, *MDH* malate dehydrogenase



In heterotrophic culture, more ATP is generated by glucose than autotrophic and mixotrophic modes in which energy is supplied by light [13]. In heterotrophic mode, glucose is metabolized as a substrate for ATP synthesis through respiratory pathways, i.e. glycolysis, PPP, and TCA cycle. Yang et al. [13] noted that 90% of the glucose metabolism in *Chlorella pyrenoidosa* was derived from the PPP, in complete darkness, and with glucose as the sole carbon source. Similarly, the PPP is a major metabolic form of sugar metabolism in heterotrophic cultures of cyanobacteria *Synechocystis* spp. [89, 90].

3 Microalgae Cultivation in Relation to Waste Utilization

In the years since Oswald proposed the idea of using algal cells to remove nitrogen and phosphorus from sewage, we have witnessed the rapid development of treatment technologies based on algal cell culture [91, 92]. High-rate algal ponds

(HRAPs), photobioreactors, and other microalgae culture devices have emerged and are gradually advancing toward application. There have been a number of comprehensive reviews covering this topic [93, 94], and here we briefly introduce the application of common open/closed culture systems and the advantages of pollutant removal with microalgae.

3.1 Open Microalgae Culture Systems

Open microalgae culture systems are reactors open to the environment using sunlight as energy [95], which have the advantage of low energy consumption, low infrastructure investment, low operating cost, and easy operation [96]. They are suitable for culturing the algal cells that grow fast and tolerate extreme environments (e.g. high concentrations of sodium bicarbonate and high salinity).

These open systems include large-scale pools, open tanks, round culture tanks, and HRAPs [96]. The most widely used system is the HRAP [91, 97, 98]. When integrating HRAP with wastewater treatment, an “algal–bacterial symbiotic system” is employed, which can achieve the simultaneous removal of many nutrients [94]. In the treatment of sewage, the symbiotic system is a more energy-efficient alternative to conventional removal processes, enabling the removal of nutrients without the need for mechanical oxygenation [99]. In symbiotic algal–bacterial systems, aerobic–heterotrophic bacteria oxidize and decompose organic pollutants in the wastewater. The resulting metabolic products provide a good source of carbon, nitrogen, and phosphorus to support algal photosynthesis. Microalgal photosynthesis uses CO_2 to produce O_2 , which in turn is consumed for the respiration of bacteria. In addition to O_2 and CO_2 that can be exchanged between microalgae and bacteria, heterotrophic bacteria metabolize the organic carbon produced from algae to produce CO_2 , NH_3 , PO_4^{3-} , H_2O , and other substances, and these substances are used to enhance microalgae growth and reproduction [93, 100].

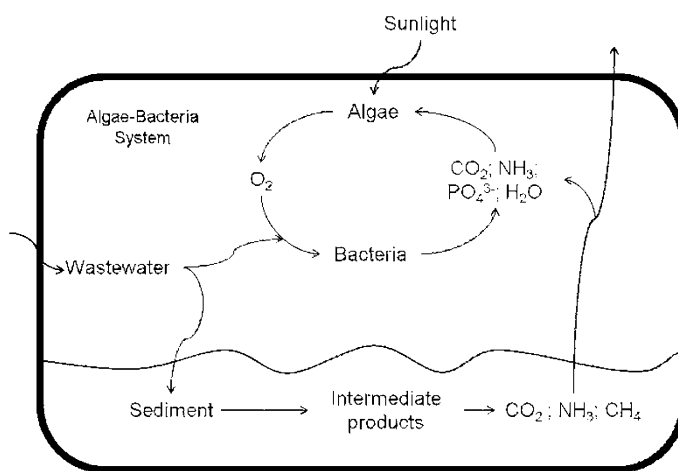


Fig. 5 Algal–bacterial symbiotic system

As shown in Fig. 5, sewage sediment produces volatile acids and other intermediates via the metabolism of bacteria; the sediment releases CO_2 , NH_3 , and CH_4 (CO_2 and NH_3 can be recycled into the algae culture, and CH_4 can be directly used as a clean energy) after being completely decomposed by bacteria. Studies have shown that algae (cyanobacteria)–bacteria combination systems have better growth and decontamination capacity than conventional algal culture systems [101]. Mujtaba and Lee [47] demonstrated a symbiotic algal–bacterial association in a process designed for wastewater treatment. The performance of inorganic nutrient (nitrogen and phosphorus) and organic pollutant removal was investigated using a co-culture system to treat municipal wastewater with different inoculum ratios of suspended activated sludge to alginate-immobilized microalgae *Chlorella vulgaris*. The results showed different removal efficiency for different inoculation rates (sludge/microalgae), and the biomass of algal cells increased from 0.03 to 0.05 g $\text{L}^{-1} \text{ day}^{-1}$ in the co-culture system with a low inoculation rate. These results indicate the existence of optimal inoculation in the co-culture system for the efficient removal of contaminants from the effluent. Liu et al. [46] further confirmed that the “algae–bacteria–effluent co-culture system” improved the removal efficiency of COD and total phosphorus (TP) in wastewater centrate, providing a promising route for the treatment of wastewater by improving nutrient removal and biomass production.

HRAPs have been shown to be effective for nutrient removal in many countries, including the United States, Germany, France, New Zealand, Israel, South Africa, Singapore, India, Bolivia, Mexico, and Brazil [93, 102]. In terms of waste utilization, depending on the product specifications, these ponds can potentially use sources of nitrogen and phosphorus from relatively clean wastewater sources. In addition, the ponds need to be provided with CO_2 , which can be from flue gas if located close enough to a point CO_2 source [103]. While the scale is small for specialized high-value products, meaning the benefits for mitigating climate change are minimal, if biofuel production can be made economically viable, significant amounts of CO_2 could be used [104]. However, the HRAP approach also has limitations. For example, growth conditions are difficult to control [105] and are susceptible to the effects of climate; algal biomass is low [106]; and the system can be more easily contaminated by other algae species, bacteria, and protozoa than closed systems.

3.2 Closed Microalgae Culture Systems

Closed microalgae culture systems refer mainly to microalgae photobioreactors, and have been designed in tubular [107], flat-tank [108], bubble column, and serpentine [109] configurations. Compared to open culture systems, photobioreactors can better control algal cell growth conditions to achieve higher productivity and reduce contamination by other algae [110, 111]. In addition, the cost of subsequent separation and purification can be reduced somewhat if a higher titer can be obtained. However, construction and operating costs are high, and there are significant technical requirements in expanding the reactor size [112].

In general, the use of a microalgae photobioreactor coupled with wastewater treatment and product output includes the following steps: (1) Design and development of the microalgae photobioreactor. The optimized devices with high efficiency and low cost are developed based on the physiological and ecological characteristics of target microalgae; and factors such as light, pH value, and temperature that are essential for microalgae growth should be considered. (2) Pretreatment of sewage. Sewage containing nitrogen and phosphorus usually needs to be pretreated to meet microalgae culture requirements. The main purpose of pretreatment is to minimize or remove the substances that are toxic or have an inhibitory effect on microorganisms. (3) Separation of treated water and algal cells. The microalgae and water bodies in the photosynthetic reactor are generally separated using membrane separation technology, and the “clear water” purified by microalgae is obtained at the outlet of the system. (4) Collection and extraction of algal biomass to produce biodiesel and other products [113, 114]. Various researchers have investigated the use of PBRs for wastewater treatment. For example, Hom-Díaz et al. [115] used a microalgae photobioreactor to treat toilet waste, removing 30–80% of pharmaceutically active compounds. García et al. [116] developed a conventional photobioreactor for biogas scrubbing applications by rationally combining the photobioreactor with hypoxia-aerobic algal–bacterial symbiosis to improve the domestic wastewater nitrification–denitrification process. Results showed that this innovative process configuration enhanced the rates of total nitrogen and phosphorus removal by assimilation of biomass, and also supported CO₂ and H₂S removal to achieve efficient upgrading of biogas. Cheng et al. [48] found that oleaginous microalgae *Tribonema minus* could grow in a photobioreactor with sewage containing industrial phenol contaminants. The contaminants in the biomass were immobilized, and could then be used as a raw material for bioenergy production.

In addition to the conventional PBRs, closed microalgae culture technology includes activated algae systems and algae immobilization technology. The activated algae system is used to produce high-concentration algal fluid, which is then inoculated in a photobioreactor through an artificial strengthening technique, and the wastewater subsequently used as culture medium [117]. Algae immobilization technology involves the use of embedding or adsorption methods to collect algae cells on a carrier, which is typically a natural macromolecule gel carrier (such as agar and calcium alginate) or an organic synthetic polymer gel carrier (such as polyvinyl alcohol [PVA] or polyacrylamide [ACAM]). Advantages of this technology, including high concentrations of algal cells, fast reaction speeds, high removal efficiency, and easy harvesting, have led to its wide adoption for wastewater treatment [94].

3.3 Microalgae Cultivation with Anaerobic Digestion Effluents of Waste

The application of food waste as feedstock in the cultivation of microorganisms allows the recycling of waste matter by assimilation in biomass and the use of metabolites of microorganisms for production of energy, materials, and chemicals [81]. In addition, it is a clean method for the disposal of food waste to produce

biogas through anaerobic digestion because of its low environmental impact, economic benefits, and high load-carrying capacity for waste minimization [118]. Han et al. [85] assessed the techno-economic feasibility of dark fermentative hydrogen production from molasses, and concluded that the payback period was 6.9 years when the hydrogen-producing plant was scaled up to 50 m³. A later study investigating a novel bioprocess combining solid-state fermentation and dark fermentation for hydrogen production suggested that the payback period of the plant would be 5 years, with an internal rate of return of 20.2% [119]. Ji et al. [120] cultured *Scenedesmus obliquus* in Bold's basal medium containing 0.5–10% (v/v) of food wastewater, and Heo et al. [121] cultured *Tetraselmis suecica* in seawater-diluted food waste. They both found that microalgae culture had a significant effect on the removal of contaminants (e.g. TN, TP, NH₃-N) in the waste, and the yields of microalgal biomass were significantly improved. Shin et al. [122] diluted anaerobically digested food wastewater effluent with the primary effluent of municipal wastewater and then cultured *Scenedesmus bijuga* to purify food wastewater and produce biodiesel. Microalgae can also be cultured with other solid waste. For example, Singh et al. [123] cultivated three algae strains (*Chlorella minutissima*, *Chlorella sorokiniana*, and *Scenedesmus bijuga*) using 6% (v/v) anaerobic digestion effluent of poultry waste, and found that the biomass growth rate increased significantly, with phosphorus removal rates of 60 and 80%, respectively. Similarly, Cai et al. [124] cultured *Synechocystis* sp. and *Nanochloropsis salina* with an artificial seawater medium containing 3–24% (v/v) anaerobic digestion effluent. The results showed that this algal culture method not only removed nitrogen and phosphorus, but also increased the algal biomass, which is consistent with the results obtained by Singh et al. [123].

With the promotion of biogas projects in large and medium-sized farms, the production of biogas by anaerobic digestion of microalgae is becoming increasingly widespread. Han et al. [125] developed a combination of solid-state fermentation and batch fermentative hydrogen production from food waste, and the highest yield was 52.4 mL H₂/g of food waste. Alberto et al. [126] used two-step fermentation to study the potential of algae as a resource for methane production. Subsequently, Li et al. [127] proposed that combining microalgae culture and purification of biogas slurry could achieve the dual effect of microbial biomass transformation and environmental treatment. Based on this concept, Xu and Li [128] explored biogas production technology of anaerobic digestion with blue-green algae in Taihu and large-scale farm manure, and laid the foundation for methane production from pig manure and other fecal waste. As shown in Table 5, the methane/biogas yield, expressed as liters (L) of methane/biogas produced per gram (g) of volatile solids (VS), was between 0.117 and 0.366 L g⁻¹ VS, indicating that methane/biogas yields vary according to different algae strains and anaerobic digestion conditions. These results suggest that large-scale biogas/methane production has the potential for expansion using a combination of microalgae culture and environmental management.

Although anaerobic digestion of microalgal biomass may be energy efficient [137], the costs would likely be prohibitive. Microalgae oil extraction for biodiesel production can also be energy efficient [138]. However, pyrolysis oil technology

Table 5 Anaerobic digestion process conditions and biogas/methane yield of algae

Microalgae	Cultivation	Anaerobic digestion process conditions	Methane/biogas yield (L g ⁻¹ VS)	Refs.
<i>Stigeoclonium</i> sp., <i>Monoraphidium</i> sp., <i>Nitzschia</i> sp., <i>Amphora</i> sp.	Wastewater	20 days (37 °C, continuous test)	0.180 (CH ₄)	[129]
<i>Chlorella vulgaris</i>	Non-sterile effluent from UASB (swine manure)	24 days (37 °C, batch reactor)	0.364 (biogas) 0.228 (CH ₄)	[130]
<i>Hydrodictyon reticulatum</i>	Secondary wastewater	25 days (35 °C, batch reactor)	0.170 (CH ₄)	[131]
<i>Rhizoclonium</i>	Drainage water	28 days (53 °C, batch reactor)	0.230–0.240 (L CH ₄ /g TS)	[132]
<i>Chlorella vulgaris</i>	Swine wastewater, nitrified secondary effluent	25 days (mesophilic conditions, batch reactor)	0.366 (biogas) 0.229 (CH ₄)	[133]
<i>Pediastrum</i> sp., <i>Micractinium</i> sp., <i>Scenedesmus</i> sp.	Primary settled sewage	14–16 days (37 °C, CSTR reactor)	0.179 (CH ₄)	[134]
<i>Scenedesmus obliquus</i> , <i>Chlorella vulgaris</i>	Primary treated urban wastewater	46 days (35 °C, batch reactor)	0.172 (biogas) 0.117 (CH ₄)	[135]
Algal biomass	Primary treated wastewater	15 days and 20 days (35 °C, continuous test)	0.130 and 0.170 (CH ₄)	[97]
Algal biomass	Sewage	28 days (38 °C, batch reactor)	0.340 (methane)	[136]

VS volatile solids, TS total solids, CSTR continuously stirred tank reactor, UASB up-flow anaerobic sludge blanket

requires dehydration, drying, and subsequent processing, thus demanding a sizable energy investment. The production of biogas by anaerobic digestion of microalgae does not require strict product separation or the extraction of oil and lipids [139]; their main product, methane, is captured in the gas phase. During fermentation, many macromolecules (proteins, lipids, and sugars—all parts of the microalgae structure) are used [140].

It may be possible to integrate a number of these waste utilization strategies. For instance, the nutrients in wastewater, such as organic nitrogen or phosphorus, can be mineralized to feed the microalgal culture [141]. The biological methane produced can be burned to produce heat and electricity, upgraded, and injected into natural gas grids or used as automotive fuels [136, 142–144]. CO₂ can be isolated and used for high-concentration open microalgal culture. The original microalgae biomass and other biofuel residues can also be used for anaerobic digestion for material recycling and cost reduction [131, 145]. It is important to note that residues of algae

Table 6 Removal efficiency of NH₃-N, TN, TP (PO₄³⁻), and COD, and the maximum biomass accumulation by microalgal cultures

Microalgae	NH ₃ -N	TN	TP (PO ₄ ³⁻)	COD	Final biomass concentration/ productivity	Refs.
<i>Chlorella</i> PY-ZU1	73%	–	95%	79%	4.81 g L ⁻¹	[153]
<i>Chlorella</i> PY-ZU1	99%	–	99%	68%	4.30 g L ⁻¹	[118]
<i>Chlorella</i> sp.	100%	75.7–82.5%	62.5–74.7%	27.4–38.4%	–	[152]
<i>Synechocystis</i> sp. <i>Nannochloropsis salina</i>	82.5–100%	71.2–100%	83.6–100%	–	0.21 g L ⁻¹ day ⁻¹	[124]
<i>Scenedesmus spinosus</i> SHOU-F7	88.82%	93.25%	97.57%	–	–	[154]
<i>Scenedesmus obliquus</i> SHOU-F21	95.84%	87.78%	97.96%	–	–	
<i>Chlorella vulgaris</i> SHOU-F28	97.18%	52.38%	96.61%	–	–	
<i>Chlorella ellipsoidea</i> SHOU-F20	96.74%	62.42%	91.51%	–	–	
<i>Oocystis solitaria</i> SHOU-F5	97.50%	91.73%	96.74%	–	–	
<i>Synechocystis</i> sp. LX1	–	98%	98%	–	0.11 g L ⁻¹	[155]
<i>Scenedesmus obliquus</i>	–	75%	12%	–	0.41 g L ⁻¹	[120]
<i>Scenedesmus bijuga</i>	–	90.7%	90.5%	66.4%	1.49 g L ⁻¹	[122]
<i>Tetraselmis suecica</i>	99.0%(NH ₄ ⁺)	–	52.3%	–	2.00 g L ⁻¹	[121]
<i>Neochloris aquatica</i> CL-M1	96.2%	–	–	81.7%	6.10 g L ⁻¹	[156]
<i>Chlorella vulgaris</i> JSC-6	91.3%	–	–	70%	3.96 g L ⁻¹	[157]
<i>Chlorella pyrenoidosa</i>	91.2%	–	–	55.4%	0.3 g L ⁻¹	[158]
<i>Chlorella zofingiensis</i>	–	81.03%	–	79.84%	2.962 g L ⁻¹	[159]
<i>Chlorella vulgaris</i>	–	97%	80%	–	2.97 g L ⁻¹ day ⁻¹	[43]
<i>Neochloris oleoabundans</i>	98%	–	–	Negligible	0.63 g L ⁻¹	[160]
<i>Neochloris oleoabundans</i>	95%	–	–	Negligible	0.125 g L ⁻¹	[161]
<i>Neochloris oleoabundans</i>	99%	–	–	Negligible	2.10 g L ⁻¹	[162]

– Undetected

after anaerobic production of biogas (biogas slurry and biogas residue) can be used directly as natural fertilizers or can be further processed [105, 146].

3.4 Changes in Inorganic Chemical Components and Accumulation of Algal Biomass

In general, wastewater, food waste, and effluents from farms are rich in various chemical elements. Studies have shown that microalgae can effectively reduce the COD and adsorb heavy metals to purify pollutants [147–149].

3.4.1 Nitrogen and Phosphorus Removal and Biomass Accumulation

Nitrogen and phosphorus (nitrite, nitrate, ammonium, and urea) are common chemical elements or components present in wastewater and waste materials. The nitrogen removed by microalgae is largely synthesized into algal protein and other active substances. Phosphorus in waste sources can also be directly absorbed by microalgal cells and converted into ATP, phospholipids, and other organic substances through various phosphorylation methods [94, 150, 151]. Studies have shown that microalgae can effectively accumulate nitrogen and phosphorus into biomass [118, 122, 152]. As shown in Table 6 (data are the maximum values of

Table 7 Metal and metal ion removal by microalgae culture

Inorganic composition		Microalgae	Refs.
Heavy metals	Pb	Diatoms species,	[39, 118, 149, 167, 171, 172]
	Co	<i>Chlorella vulgaris</i> ,	
	Hg	<i>Desmodesmus insignis</i> , <i>Nannochloropsis salina</i>	
	Cd		
	As		
	Cu		
	Ni		
Trace metals	Zn	<i>Chlorella vulgaris</i> ,	[118, 149, 167]
	Fe	<i>Chlorella</i> PY-ZU1	
	Mn		
	Mo		
Metal ions	Cu ²⁺	<i>Dicrateria</i> sp.,	[169, 173–176]
	Hg ²⁺	Charophyte,	
	Pb ²⁺	<i>Chlorella vulgaris</i> ,	
	Cr ⁺	<i>Chlamydomonas reinhardtii</i>	
	Cd ²⁺		
	Mn ²⁺		
	Zn ²⁺		

experiments), a few studies achieved over 90% removal of nitrogen and phosphorus, with the commonly studied algae species including freshwater *Scenedesmus*, *Chlorella*, and *Spirulina*. Thus microalgae cultures can remove nitrogen, phosphorus, and other substances as a means of water purification, while accumulating new biomass that can be used for bioenergy or other applications.

The use of microalgae to remove nitrogen and phosphorus from partially treated sewage is currently under intensive study [163], as the advantages of CO₂ fixation, nitrogen and phosphorus removal, and microalgae biomass production [164, 165] become more attractive. In addition, the use of microalgae to treat sewage can overcome the drawbacks of high-energy nitrogen removal processes and suboptimal nutrient recovery with traditional sewage treatment methods [150]. However, although it is generally considered to be relatively cost-effective, simple, and feasible, this method has yet to be widely adopted.

3.4.2 Metal Removal by Microalgae Culture

Heavy metals are stable and toxic at low levels, passing through the food chain, endangering the growth and reproduction of aquatic organisms and causing a variety of human diseases [166]. Many studies have shown that microalgae can be widely used for biosorption of heavy metals and other pollutants [39, 149]. Rugnini et al. [167] demonstrated the potential for employing green microalgae for bioremediation of metal-polluted water, given their ability to grow in the presence of high metal concentrations and to remove them efficiently. Hala and Sjahrul [168] studied the biosorption of Zn²⁺ and Cd²⁺ ions by *Nannochloropsis salina*, reporting removal efficiency of 96 and 93%, respectively. With regard to bioremediation of radioactive metals (e.g. Th, U and Ra), toxic heavy metals (e.g. Cd, Cu, Hg and Pb), and economically valuable metals (e.g. Ag, Au, Pt and Co), many studies using microalgae have been reported [149, 167, 169]. For example, Napan et al. [170] introduced 14 inorganic contaminants (As, Cd, Co, Cr, Cu, Hg, Mn, Ni, Pb, Sb, Se, Sn, V, and Zn) into the media of *Nannochloropsis salina* culture. Trace contaminant analysis showed that Cd, Co, and Mn were absorbed at rates greater than 90%, while As, Cr, Cu, Ni, and Pb were absorbed at 50 to 90%, and Sb and V were absorbed at less than 50%. As shown in Table 7, different microalgae can remove different metal elements or metal ions, with *Chlorella* species the most extensively tested to date.

3.5 Changes in Organic Chemical Components in Microalgae Culture

Studies have shown that cultivation using wastewater and food waste can increase the productivity of lipids in microalgal cultures. Yu et al. [177] tested ten microalgae strains cultivated in diluted anaerobically digested effluent kitchen waste, and found that the biodiesel produced from lipids extracted from these strains had better functional properties (presumably due to an improved fatty acid profile) than those cultivated on regular growth media. Liu et al. [154] used pig farm wastewater for microalgae cultivation, and found that the amounts of 16:0 and 18:3 n3 (fatty acids suitable for biodiesel production) were higher than those grown on

regular media across 15 microalgae strains. Furthermore, the protein content of algae was significantly higher in the cultures grown in wastewater-enriched media. Pleissner et al. [178] confirmed that heterotrophic cultures of *Schizochytrium mangrovei* and *Chlorella protothecoides* using pure food waste hydrolysate as medium produced biomass of up to 14 g L^{-1} . In this study, the content of lipids, protein, and docosahexaenoic acid (DHA) in *Chlorella pyrenoidosa* was increased significantly, while the content of oleic acid, linolenic acid (ALA), and carbohydrate remained unchanged. Thus microalgae can use waste to synthesize their own biomass. CO_2 in air and waste gas streams can be used as a carbon source, inorganic and organic nitrogen can be used for protein synthesis, and phosphorus and phosphates can be used for nucleotide and phospholipid synthesis, thereby increasing the biomass of algal cells. The resulting lipids, proteins, and carbohydrates can be further used as valuable products.

4 Development and Application of Value-Added Products of Microalgae

Fuels such as biodiesel, ethanol, biogas, and methane can be produced from lipids and carbohydrates, and the remaining protein-rich material can be processed into animal feed. In addition, other higher-value compounds, such as DHA and astaxanthin, in the algal cells can be extracted to develop chemicals or materials (Fig. 6).

4.1 Production of Biodiesel from Microalgal Lipids

Biodiesel can be produced from triacylglycerols (TAGs) that accumulate in the microalgae. This requires cell disruption and lipid extraction. Since most of the

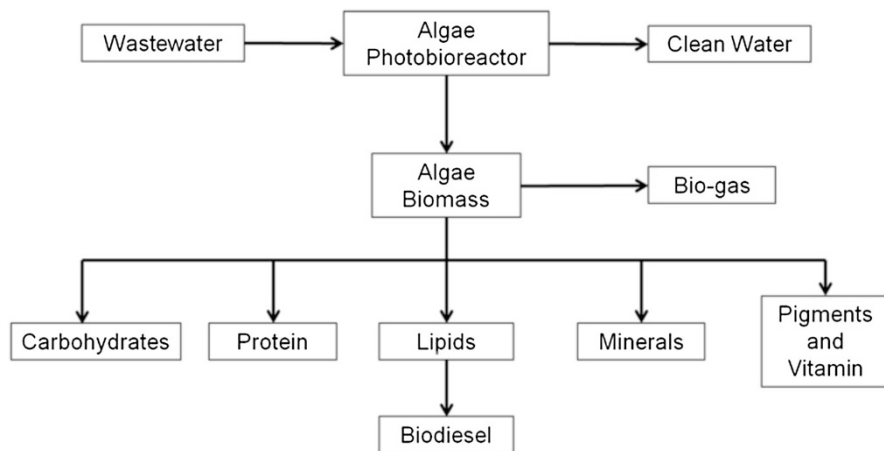


Fig. 6 Overview of algae-derived products

Table 8 Advantages and disadvantages of different types of catalysts for transesterification of oils to biodiesel

Types	Advantages	Disadvantages	Applicable raw materials	Refs.
Homogeneous base catalyst	Mild reaction conditions; high catalytic activity; wide application range; fast reaction rate	More sensitive to free fatty acids and water contents in sample; easy saponification; poor reproducibility	Feed oil containing no free fatty acids or water	[195]
Homogeneous acid catalyst	Less sensitive to free fatty acids; high product yield	Easily corrodes equipment; difficult recycling; high cost	Food waste oil	[196, 197]
Heterogeneous base catalyst	Easy to separate, recyclable; high activity; high efficiency	Toxic; slower reaction rate than homogeneous base catalyst	–	[196]
Heterogeneous acid catalyst	Less sensitive to free fatty acids; easy to separate and reduced corrosion	High cost and low activity compared with the liquid acid	–	[198, 199]
Biological enzymes	Environmentally friendly and low cost	Slow reaction rate	Waste cooking oil	[200]
Supercritical method	High phase solubility; fast reaction rate	High temperature and pressure; high production cost	Various types	[196]
Co-solvent method	Fast reaction rate and easy to recover	Risk, toxicity	Vegetable oil, waste edible oil, animal fat	[196, 201]


– Unknown

microalgal cells have rigid cell walls, rupture of algal cells prior to solvent contact can greatly improve the resulting lipid yields [179, 180].

4.1.1 Disruption of Microalgal Cells

Cell disruption can be achieved by mechanical methods such as bead milling [181], ultrasonication [182], and high-pressure homogenization [180], and non-mechanical methods involving microwave heating [183] and chemical or enzymatic hydrolysis [181]. Although cell disruption can be achieved by various techniques, few are

Fig. 7 The process of triglyceride transesterification reaction (R1, R2, and R3 are hydrocarbon chains of fatty acids) [205]

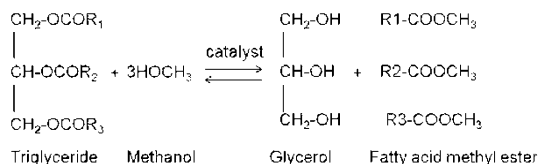

feasible for process-scale implementation. One of these, high-pressure homogenization, is a particularly promising technique for microalgal rupture. The process is not only effective in aqueous environments (excluding the need for energy-intensive drying), but it can also be expanded for processing large volumes [184, 185]. For example, Halim et al. [186] reported that high-pressure homogenization demonstrated high efficiency in disrupting the microalgae *Chlorococcum* sp., and the technique has also been used successfully for *Nannochloropsis* sp. (up to 25% w/w solids) [187].

4.1.2 Extraction of TAG as a Biodiesel Feedstock

In addition to the disruption of microalgae, the extraction of lipids is an important step in the preparation of biodiesel. Extraction techniques include organic solvent extraction, supercritical fluid extraction, and thermal cracking, all of which require the algae to be dried [188]. However, the drying pretreatment not only extends the biodiesel production cycle, but also affects lipid extraction efficiency. Cooney et al. [189] utilized the heat of vaporization for the drying step, and reported an energy load of up to 391.6 MW. In order to avoid the high energy input, novel wet routes including subcritical water extraction and in situ lipid milking have been proposed [188]. Olmstead et al. [180] reported effective extraction of wet algae to TAG through contact of the concentrated paste with hexane through impeller mixing, which achieved recovery of up to 70% w/w of the total lipids and was able to be performed at mild temperatures.

4.1.3 Conversion of Lipids to Biodiesel

Transesterification is the conventional and most commonly used method for producing biodiesel from vegetable oil. As shown in Table 8, the preparation of

Fig. 8 The mechanism of alkali-catalyzed transesterification reaction (R and R' are hydrocarbon chains of fatty acids) [203]


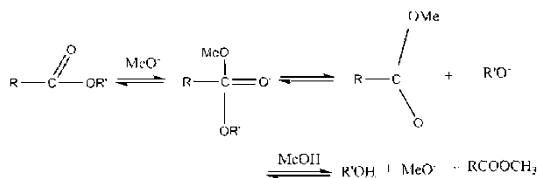


Fig. 9 The mechanism of acid-catalyzed transesterification reaction (R and R' are hydrocarbon chains of fatty acids) [203]

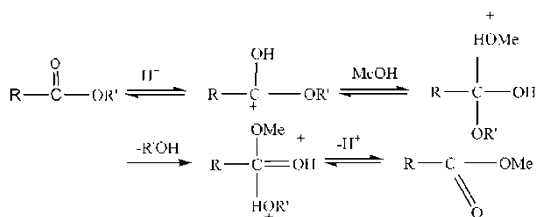


biodiesel by transesterification can be divided into different types, and different catalysis methods have their unique advantages and disadvantages. Generally, transesterification is the reaction of an ester and an alcohol under the catalysis of an acid or alkaline to produce a new ester and new alcohol, i.e. the alcoholysis of the ester [190, 191]. Transesterification reduces the molecular weight of TAG oil to about one-third of the original, reduces the viscosity by a factor of about 8, improves fuel volatility, and produces a fuel with specifications close to those of mineral diesel [192]. It has certain advantages over petrochemical diesel: (1) high combustion efficiency—the oxygen content of biodiesel accelerates the combustion process and decreases its oxidation potential; (2) favorable lubricity—there is a significant improvement (about 30%) in lubricity when less than 1% of biodiesel is added to conventional diesel fuel; (3) fast biodegradability—biodiesel degrades approximately four times as fast as petrodiesel, mainly due to its low oxygen content [193, 194].

As shown in Fig. 7, transesterification is a multi-step reaction in which triglycerides are converted to esters (biodiesel) and glycerol (by-product). However, different catalysts have distinct catalytic mechanisms. (1) As shown in Fig. 8, alkali-catalyzed transesterification (alcoholysis) is a nucleophilic substitution reaction [202]. Alcohol first forms an anion MeO^- in the alkaline environment, and MeO^- then attacks the first carboxyl carbon atom of the raw material glycerol ester Sp^2 hybrid, and a nucleophilic addition reaction forms the intermediate of a tetrahedral structure. This intermediate reacts with the alcohol to regenerate the anion MeO^- , and finally the intermediate rearrangement produces a fatty acid ester and diglyceride [203]. In this reaction, the alkoxy anion formed in the first step is a true catalyst that promotes the progress of the reaction. (2) As shown in Fig. 9, the carboxyl groups on the triglycerides form protonated carbons and undergo nucleophilic reactions with the alcohols to give the tetrahedral intermediates. The resulting tetrahedral intermediates are formed by elimination reaction, and finally produce new fatty acids ester. (3) The preparation of biodiesel by supercritical transesterification refers to the transesterification reaction of alcohols and algal oils in supercritical conditions, and belongs to nucleophilic reactions [204]. The O atoms on methanol attack the positively charged carbon atoms to form intermediates, and the H atom of the intermediate alcohol species is then transferred to the alkyl group of the triglycerides to form another intermediate, thereby obtaining the transesterification product (Fig. 10).

Hydrothermal liquefaction (HTL) refers to the thermochemical conversion of wet biomass material into an oily product (i.e. liquid bio-oil) under high-temperature and high-pressure (200–350 °C, 5–20 MPa) conditions. This technology, originally used to process straw and macroalgae, is now considered a promising technology for microalgal bio-oil production. HTL conversion efficiency is related to many factors, such as temperature, reaction time, algal species, and catalyst. In contrast to traditional transesterification methods for producing biodiesel, HTL converts lipids and carbohydrates to oil, but in the process degrades protein and other higher-value components of the microalgae [205]. The destruction of protein and other high-value biomass components may be less an issue for microalgae grown on wastewater, which precludes their use as an animal or human food source or

Fig. 10 The mechanism of supercritical transesterification (R and R1 are hydrocarbon chains of fatty acids) [204]

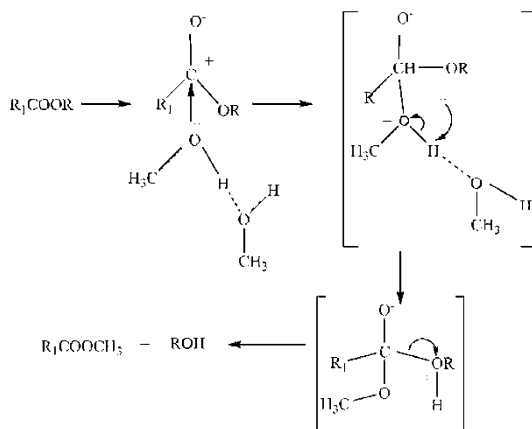

supplement. Another concern with the conversion of high-protein biomass using HTL, however, is the contamination of the oil by nitrogen compounds.

As shown in Fig. 11, HTL is a process that involves a series of chemical reactions [205–207]. At lower temperatures (0–100 °C), protein, lipids, and carbohydrates in the microalgae are hydrolyzed to produce amino acids, fatty acids, reducing sugars, and other intermediates. In the 100–200 °C range, the intermediate products undergo further reaction, such as amino acid decarboxylation and deamination, fatty acid decarboxylation, and bond re-forming reactions in reducing sugars, as well as the formation of amines, acids, hydrocarbons, and epoxy compounds, among others. Above 200 °C, further fatty acid amination and

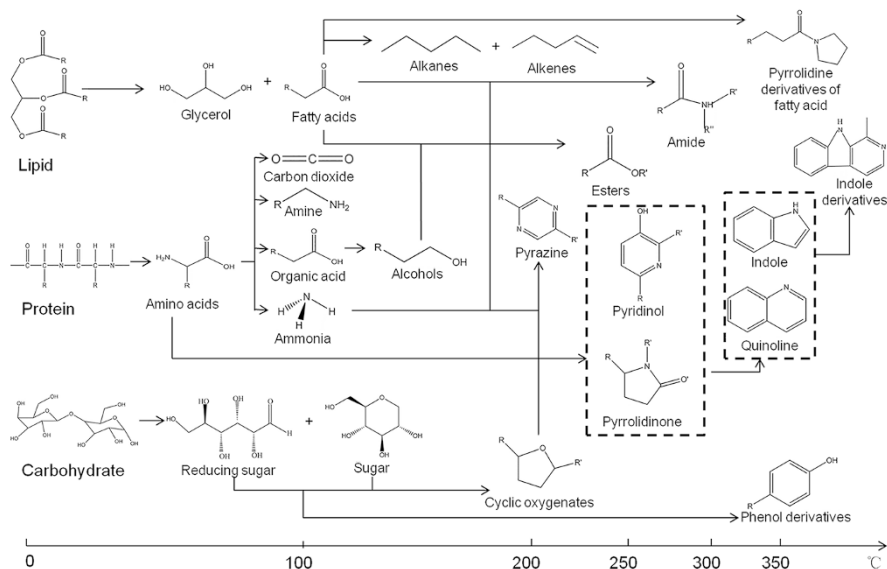


Fig. 11 Reaction process of HTL of low-lipid microalgae. Modified from Gai et al. [213]

esterification reactions occur, as well as the Maillard reaction of amino acids and reducing sugars and the formation of aliphatic amines, esters, and a variety of nitrogen oxycarbonyl compounds. Therefore, temperature plays a key role in microalgae HTL bio-oil production and its quality, and the choice of temperature is critical for industrial production safety and economy. Several studies have reported the effect of temperature on the yield and quality of biofuel, with results showing that the largest volume of bio-oil was obtained in a range of 250–375 °C [206–211]. Meanwhile, the components of feedstock, to a large extent, determine the chemical properties and yields of biocrude oil [212]. Results reported by Zou et al. [210] showed that low-fat, high-protein *Nannochloropsis* sp. and high-fat, low-protein *Chlorella* sp. could be effectively converted into biological crude oil, with maximum reported yields of 55.0 and 82.9%, respectively. HTL may be a promising technology for converting wet algae biomass, particularly when grown from waste sources that preclude the use of the biomass for high-value applications such as food or feed. However, the resulting biocrude still has higher oxygen and nitrogen content (5–15% and 5–10%, respectively) than traditional petroleum fuels, which would affect the bio-oil heat value and release nitrogen oxides into the atmosphere during the combustion process. Therefore, physicochemical modification is still needed to remove the bio-oil oxygen and nitrogen in order to improve the quality of biocrude.

4.2 Application of Microalgae in the Production of Other Energy Sources

In addition to biodiesel or bio-oil, the production of biogas (methane) or bioethanol from microalgal biomass is possible. This can be done either using the whole biomass or by converting the biomass remaining from biodiesel production. For instance, after extracting the oils used for biodiesel production, the remaining algae residue can be used as raw material to obtain methane via anaerobic digestion [214]. This can be accomplished with wet microalgae and can be combined directly with existing digester technology available in many wastewater treatment plants. The major limitation to this approach is the low commercial value of biogas fuel, which has hampered the adoption of biogas production from microalgal biomass.

Today's most widely used biofuel is ethanol. Most ethanol is produced from so-called first-generation feedstock such as sugarcane or corn, although progress continues in second-generation lignocellulosic ethanol production [215]. An alternative is the use of microalgae as a source of ethanol. Microalgae are able to accumulate starch that can be depolymerized to glucose as a raw material for fermentation to ethanol [216]. In addition, microalgae cell walls are typically composed of polysaccharides such as cellulose. Since cell walls are a residue from microalgae oil extraction, it is possible to convert the polysaccharide into ethanol fuel using cellulosic ethanol technology. In addition, cyanobacteria have been genetically modified to produce ethanol directly during photosynthetic growth, a process brought to scale by the company Algenol [215].

Ethanol production from starch or other polysaccharides involves hydrolysis into fermentative sugars, followed by fermentation to ethanol. The hydrolysis process usually consists of a pretreatment step, such as dilute acid hydrolysis, followed by

enzymatic saccharification. The fermentation to ethanol is usually performed using yeast, after which the ethanol is recovered by distillation. A similar process has been applied to microalgae biomass saccharification. Ashokkumar et al. [217] studied microalgae *Scenedesmus bijugatus* under different H_2SO_4 concentrations and temperature conditions, while other parameters (reaction time and solids concentration) remained unchanged. The authors found that after lipid extraction, the saccharification rate of the remaining biomass was the highest under the conditions of 2% H_2SO_4 concentration and 130 °C. In other studies, Nguyen et al. [218] reported an ethanol yield of up to 29 g ethanol/g microalgae in acid-pretreated *Chlamydomonas reinhardtii*, and Wang et al. [219] reported that treatment with 3% H_2SO_4 at 121 °C for 45 min resulted in the highest sugar yield in the hydrolysate of microalgae biomass.

The production of ethanol from microalgal biomass is simpler than from lignocellulosic feedstock, in that it has no lignin or hemicellulose (which contains 5-carbon sugars that are more challenging to ferment) [220]. However, additional difficulties arise in producing microalgal biomass, including the low initial concentrations, susceptibility to culture failure, and the capital costs of the growth ponds. In addition, the ethanol concentration in the fermentation broth can be quite low for microalgal biomass, as the concentration and sugar content is less than in conventional feedstock. This increases distillation cost and energy consumption, which is currently a major limitation to the economic feasibility of algal ethanol production [221].

4.3 Application of Microalgae as Protein Feed

A large number of studies have shown that algae protein can replace fish meal or soy protein in feed formulations [222–224]. While this can be used for terrestrial animals, the application of microalgae in aquatic feed is particularly attractive, given that microalgae are the natural base of the aquatic food chain, and contain required nutrient components such as omega-3 fatty acids and carotenoids [225].

The species of *Spirulina* have high nutritional value, with protein content of up to 60–70% and relatively low cellulose content that is easily digested and absorbed. *Spirulina* can be used directly as feed for aquatic animals [226] or indirectly as feed additives [227] to promote animal growth [228] or enhance animal immunity [229]. The Di Aisheng company has built *Spirulina* farms in Thailand with an annual output of 150 t, up to 60 t of which is used as bait or feed for aquatic animals [230]. Moreover, several studies have reported that *Chlorella*, which has low crude fiber content and high protein content, can be used as feed or feed additives for livestock or aquaculture animals [231–233]. Zhang and Meng [234] utilized municipal wastewater sludge to culture *Spirulina* and *Chlorella*, with results showing biomass, protein, and essential and non-essential amino acid content that was nearly the same as that obtained from microalgae grown in traditional culture media.

4.4 Integrated Development and Application of Other Components of Microalgae

In addition to being rich in oil, microalgae are rich in wholesome substances such as omega-3 fatty acids (eicosapentaenoic acid [EPA] and DHA). For example, EPA not only has a significant effect in preventing cardiovascular disease [235] and muscular dystrophy [236], but also exhibits anti-inflammatory activity [237] and regulates immunity [238]. Yuan et al. [239] suggested that phycobiliproteins and carotenoids had similar biological activity including antioxidant, anticancer, and antidiabetic properties. In another study, polysaccharides showed antioxidant or antibacterial effects on organisms [240]. Depending on the oil extraction method, the ω -3 fatty acids and pigments will either be extracted with the oil or remain with the algae residue [180, 241, 242], in which the polysaccharides and proteins will reside. These substances can be isolated and purified for the purpose of animal or human nutrition. However, the issue of food safety is a serious concern for algae culturing from waste. Ma et al. [243] utilized dairy plant wastewater and brewery anaerobic-treated wastewater to cultivate *Spirulina*. Their study found that several key parameters, including the content of protein, water, ash, and heavy metals, nearly met the national standard of food-grade *Spirulina* in China (GB/T 19919-1997). In this case, the use of wastewater was found to reduce the cost of *Spirulina* production, without compromising the quality of *Spirulina* products, which suggests the possibility of repurposing food industry wastewater.

5 Conclusions and Future Perspectives

A growing body of literature and recent developments suggest that microalgae cultivation is a valid option for waste recycling that is technically feasible and may contribute to sustainable economic development. Microalgae can capture CO₂ in waste gas and metabolize different forms of nitrogen, phosphorus, and carbon in wastewater to produce useful biomass. For waste applications, open cultivation systems such as raceway ponds or HRAPs are more efficient than closed photobioreactors, as they are more economical at a large scale. Microalgae can be effective in absorbing heavy metals in wastewater components, helping to achieve water purification. The biomass produced during the assimilation of these wastes acts as the raw material that can be converted into biofuels and other high-value-added products.

The source of waste influences the biochemical composition and growth rate of microalgae. Inhibition or augmentation of growth is possible through provision of the basic metabolic needs of the microalgae. Since the composition of waste varies, careful characterization is necessary before fermentation. Additionally, the use of waste for microalgae cultivation requires consideration of contamination by bacteria, viruses, protozoa, and heavy metals, which may influence how the cultivated biomass can be utilized, particularly with respect to feed applications. Developing a better understanding of how growth on wastewater affects the safe application of biomass as feed is an area requiring further research. Whether

bioactive substances (such as astaxanthin and DHA) extracted from sewage-cultured microalgae can be made safe for application to foods, cosmetics, and other industries must be explored in future studies.

While the use of microalgae for waste valorization has enormous potential, it is yet to be fully realized. As pressure mounts for the establishment of responsible waste management strategies, the feasibility of implementing microalgal solutions will improve. Continued technological developments and scientific advances will also lead to more viable industrial microalgal processes. Many of the applications of microalgae for waste treatment involve open growth systems that allow multiple species to grow as consortia. Advances in internet monitoring systems may also be applied to microalgae cultivation practice. The use of modern biological tools such as metabolomics will improve our understanding of these complex microalgal communities, enabling the development of more productive and robust processes. Much recent progress has been made on developing efficient downstream processes to convert microalgal biomass into useful products. However, further improvements to dewatering, lipid extraction, and biomass conversion technologies would all be beneficial.

Acknowledgements The authors acknowledge financial support from the National Natural Science Foundation of China (31501493) and “Young Eastern Scholar program” at Shanghai Institutions of Higher Learning (QD2015047).

Compliance with ethical standards

Ethics Approval and Consent to Participate Not applicable.

Consent for Publication Yong Chen, Li-ping Sun, Zhi-hui Liu, Greg Martin, and Zheng Sun approved the manuscript.

Conflict of Interest Yong Chen, Li-ping Sun, Zhi-hui Liu, Greg Martin, and Zheng Sun declare that they have no conflict of interest.

References

1. Razzak SA, Ali SAM, Hossain MM, Delasa H (2017) Biological CO₂ fixation with production of microalgae in wastewater—a review. *Renew Sustain Energy Rev* 76:379–390
2. Siegenthaler U, Stocker TF, Monnin E, Lüthi D, Schwander J, Stauffer B, Raynaud D, Barnola JM, Fischer H, Masson-Delmotte V, Jouzel J (2005) Stable carbon cycle-climate relationship during the Late Pleistocene. *Science* 310(5752):1313–1317
3. Chang EH, Yang SS (2003) Some characteristics of microalgae isolated in Taiwan for biofixation of carbon dioxide. *Bot Bull Acad Sinica* 44(1):43–52
4. Correll DL (1998) The role of phosphorus in the eutrophication of receiving waters: a review. *J Environ Qual* 27:261–266
5. Dodds WK, Bouska WW, Eitzmann JL, Pilger TJ, Pitts KL, Riley AJ (2009) Eutrophication of U.S. freshwaters: analysis of potential economic damages. *Environ Sci Technol* 43(1):12–19
6. Odnr ODH (2010) State actions for water quality improvement at Grand Lake, Saint Marys. <http://www.doc88.com/p-9052395370394.html>
7. Karmee SK (2016) Liquid biofuels from food waste: current trends, prospect and limitation. *Renew Sustain Energy Rev* 53:945–953

8. Hartmann H, Ahring BK (2006) Strategies for the anaerobic digestion of the organic fraction of municipal solid waste: an overview. *Water Sci Technol* 53(8):7–22
9. El-Fadel M, Findikakis AN, Leckie JO (1997) Environmental impacts of solid waste landfilling. *J Environ Manag* 50:1–25
10. Zhou WG, Min M, Li YC, Hu B, Ma XC, Cheng YL (2012) A hetero-photoautotrophic two-stage cultivation process to improve wastewater nutrient removal and enhance algal lipid accumulation. *Biores Technol* 110(1):448–455
11. Boelee NC, Temmink H, Janssen M, Buisman CJN, Wijffels RH (2012) Scenario analysis of nutrient removal from municipal wastewater by microalgal biofilms. *Water* 4(2):460–473
12. Oswald WJ (2003) My sixty years in applied algology. *J Appl Phycol* 15:99–106
13. Yang C, Hua Q, Shimizu K (2000) Energetics and carbon metabolism during growth of microalgal cells under photoautotrophic, mixotrophic and cyclic light-autotrophic/dark-heterotrophic conditions. *Biochem Eng* 6(2):87–102
14. Foley PM, Beach ES, Zimmerman JB (2011) Algae as a source of renewable chemicals: opportunities and challenges. *Green Chem* 13:1399–1405
15. Fogassy G, Ke P, Figueras F, Cassagnau P, Rouzeau S, Courault V, Gelbard G, Pinel C (2011) Catalyzed ring opening of epoxides: application to bioplasticizers synthesis. *Appl Catal* 393:1–8
16. Gallezot P (2012) Conversion of biomass to selected chemical products. *Chem Soc Rev* 41:1538–1558
17. Deshpande M, Daniels L (1995) Evaluation of sophorolipid biosurfactant production by *Candida bombicola* using animal fat. *Biores Technol* 54:143–150
18. Lu Y, Larock RC (2010) Aqueous cationic polyurethane dispersions from vegetable oils. *Chem Sus Chem* 3:329–333
19. Venus J, Richter K (2010) Production of lactic acid from barley: strain selection, phenotypic and medium optimization. *Eng Life Sci* 6(5):492–500
20. Blanc B, Bourrel A, Gallezot P, Haas T, Taylor P (2000) Starch-derived polyols for polymer technologies: preparation by hydrogenolysis on metal catalysts. *Green Chem* 2:89–91
21. Benemann JR (1993) Utilization of carbon dioxide from fossil fuel-burning power plants with biological systems. *Energy Convers Manage* 34(9):999–1004
22. Larsson M, Lindblom J (2011) Algal flue gas sequestration and wastewater treatment: an industrial experiment. Master of Science Thesis Stockholm, Sweden
23. Raven and Beardall (2003) In: Govindjee, Sharkey, Thomas D (ed) *Advances in Photosynthesis and Respiration*, Springer Dordrecht Heidelberg, New York
24. Singh V, Tiwari A, Das M (2016) Phyco-remediation of industrial waste-water and flue gases with algal-diesel engenderment from micro-algae: a review. *Fuel* 173:90–97
25. Giordano M, Beardall J, Raven JA (2005) CO₂ concentrating mechanisms in algae: mechanisms, environmental modulation, and evolution. *Annu Rev Plant Biol* 56(1):99–131
26. Almashhadani MKH, Bandulasena HCH, Zimmerman WB (2012) CO₂ mass transfer induced through an airlift loop by a microbubble cloud generated by fluidic oscillation. *Ind Eng Chem Res* 51(4):1864–1877
27. Fan LH, Zhang YT, Cheng LH, Zhang L, Tang DS, Chen HL (2010) Optimization of carbon dioxide fixation by *Chlorella vulgaris* cultivated in a membrane-photobioreactor. *Chem Eng Technol* 30(8):1094–1099
28. Kim HW, Marcus AK, Shin JH, Rittmann BE (2011) Advanced control for photoautotrophic growth and CO₂-utilization efficiency using a membrane carbonation photobioreactor. *Environ Sci Technol* 45(11):5032–5038
29. Noel JD, Koros WJ, Mccool BA, Chance RR (2012) Membrane-mediated delivery of carbon dioxide for consumption by photoautotrophs: eliminating thermal regeneration in carbon capture. *Ind Eng Chem Res* 51(12):4673–4681
30. Zheng Q, Martin G, Kentish S (2016) Energy efficient transfer of carbon dioxide from flue gases to microalgal systems. *Energy Environ Sci* 9(3):1074–1082
31. Tang D, Han W, Li P, Miao X, Zhong J (2011) CO₂ biofixation and fatty acid composition of *Scenedesmus obliquus* and *Chlorella pyrenoidosa* in response to different CO₂ levels. *Biores Technol* 102(3):3071–3076
32. Yoo C, Jun SY, Lee JY, Ahn CY, Oh HM (2010) Selection of microalgae for lipid production under high levels carbon dioxide. *Biores Technol* 101(1):S71–S74
33. Hauck JT, Scierka SJ, Perry MB (1996) Effects of simulated flue gas on growth of microalgae. Preprints Papers Am Chem Soc Div Fuel Chem 41(4):1391–1396

34. Mortensen LM, Gislerod HR (2014) The effect on growth of *Chlamydomonas reinhardtii* of the fuel gas from a power plant based on waste combustion. *AMB Express* 4(1):1–9
35. Lee JS, Lee JP (2003) Review of advances in biological CO₂ mitigation technology. *Biotechnol Bioprocess Eng* 8(6):354–359
36. Malhotra SS, Hocking D (2010) Biochemical and cytological effects of sulphur dioxide on plant metabolism. *New Phytol* 76(2):227–237
37. Nagase H, Yoshihara K, Eguchi K, Okamoto Y, Murasaki S, Yamashita R, Hirata K, Miyamoto K (2001) Uptake pathway and continuous removal of nitric oxide from flue gas using microalgae. *Biochem Eng J* 7:241–246
38. Van Den Hende S, Vervaeren H, Boon N (2012) Flue gas compounds and microalgae: (bio-) chemical interactions leading to biotechnological opportunities. *Biotechnol Adv* 30(6):1405–1424
39. Colombo A, Marzorati S, Lucchini G, Cristiani P, Pant D, Schievano A (2017) Assisting cultivation of photosynthetic microorganisms by microbial fuel cells to enhance nutrients recovery from wastewater. *Biores Technol* 237:240–248
40. Tsolcha ON, Tekerlekopoulou AG, Akratos CS, Aggelis G, Genitsaris S, Moustaka-Gouni M (2017) Biotreatment of raisin and winery wastewaters and simultaneous biodiesel production using a leptolyngbya-based microbial consortium. *J Clean Prod* 148:185–193
41. Mata TM, Melo AC, Simões M, Caetano NS (2012) Parametric study of a brewery effluent treatment by microalgae *Scenedesmus obliquus*. *Biores Technol* 107(1):151–158
42. Bond R, Straub C (1974) In: Co CR, Straub CP, Bond RG (eds) *Handbook of Environmental Control*. Chemical Rubber Company
43. Choi HJ, Lee SM (2015) Effect of the N/P ratio on biomass productivity and nutrient removal from municipal wastewater. *Bioprocess Biosyst Eng* 38(4):761–766
44. Garcia GG, Woolley E, Rahimifard S (2017) Optimising industrial food waste management. *Procedia Manuf* 8:432–439
45. Lv J, Guo J, Feng J, Liu Q, Xie S (2017) Effect of sulfate ions on growth and pollutants removal of self-flocculating microalga *Chlorococcum* sp. GD in synthetic municipal wastewater. *Biores Technol* 234:289–296
46. Liu H, Lu Q, Wang Q, Liu W, Wei Q, Ren H, Ming C, Min M, Chen P, Ruan R (2017) Isolation of a bacterial strain, *Acinetobacter* sp. from centrate wastewater and study of its cooperation with algae in nutrients removal. *Biores Technol* 235:59–69
47. Mujtaba G, Lee K (2017) Treatment of real wastewater using co-culture of immobilized *Chlorella vulgaris*, and suspended activated sludge. *Water Res* 120:174–184
48. Cheng TY, Zhang W, Zhang WL, Yuan GH, Wang H, Liu TZ (2017) An oleaginous filamentous microalgae *Tribonema minus* exhibits high removing potential of industrial phenol contaminants. *Biores Technol* 238:749–754
49. Maity JP, Hou CP, Majumder D, Bundschuh J, Kulp TR, Chen CY (2014) The production of biofuel and bioelectricity associated with wastewater treatment by green algae. *Energy* 78:94–103
50. Christou A, Karaolia P, Hapeshi E, Michael C, Fattakassinos D (2017) Long-term wastewater irrigation of vegetables in real agricultural systems: concentration of pharmaceuticals in soil, uptake and bioaccumulation in tomato fruits and human health risk assessment. *Water Res* 109:24–34
51. Sibrell PL, Montgomery GA, Ritenour KL, Tucker TW (2009) Removal of phosphorus from agricultural wastewaters using adsorption media prepared from acid mine drainage sludge. *Water Res* 43(8):2240–2250
52. Armbrust EV, Berges JA, Bowler C, Green BR, Martinez D, Putnam NH (2004) The genome of the diatom *Thalassiosira pseudonana*: ecology, evolution, and metabolism. *Science* 306(5693):79–86
53. Ganuza E, Anderson AJ, Ratledge C (2008) High-cell-density cultivation of *Schizochytrium* sp. in an ammonium/pH-auxostat fed-batch system. *Biotech Lett* 30(9):1559–1664
54. Wilhelm C, Büchel C, Fisahn J, Goss R, Jakob T, Laroche J (2006) The regulation of carbon and nutrient assimilation in diatoms is significantly different from green algae. *Protist* 157(2):91–124
55. Perez-Garcia O, Escalante FME, De-Bashan LE, Bashan Y (2011) Heterotrophic cultures of microalgae: metabolism and potential products. *Water Res* 45(1):11–36
56. Fernandez E, Galvan A (2007) Inorganic nitrogen assimilation in *Chlamydomonas*. *J Exp Bot* 58(9):2279–2287
57. Lu B, Yuan Y, Zhang C, Ou J, Zhou W, Lin Q (2005) Modulation of key enzymes involved in ammonium assimilation and carbon metabolism by low temperature in rice (*Oryza sativa* L.) roots. *Plant Sci* 169(2):295–302

58. Vanoni MA, Curti B (2005) Structure-function studies on the iron-sulfur flavoenzyme glutamate synthase: an unexpectedly complex self-regulated enzyme. *Arch Biochem Biophys* 433(1):193–211
59. Inokuchi R, Kuma KI, Miyata T, Okada M (2002) Nitrogen-assimilating enzymes in land plants and algae: phylogenetic and physiological perspectives. *Physiol Plant* 116(1):1–11
60. Mehta SK, Gaur JP (2001) Concurrent sorption of Ni and Cu by *Chlorella vulgaris* from a binary metal solution. *Appl Microbiol Biotechnol* 55(3):379–382
61. Deng L, Zhu X, Wang X, Su Y, Su H (2007) Biosorption of Copper from aqueous solutions by green alga *Cladophora fascicularis*. *Biodegradation* 18(4):393–402
62. Chen JP, Yang L (2006) Study of a heavy metal biosorption onto raw and chemically modified *Sargassum* sp. via spectroscopic and modeling analysis. *Langmuir Acs J Surf Coll* 22(21):8906–8914
63. Arica YM, Tüzün I, Yaşın E, Ince Ö, Bayramoğlu G (2005) Utilisation of native, heat and acid-treated microalgae *Chlamydomonas reinhardtii*, preparations for biosorption of Cr ions. *Process Biochem* 40(7):2351–2358
64. Lei Y, Paul CJ (2008) Biosorption of hexavalent chromium onto raw and chemically modified *Sargassum* sp. *Biores Technol* 99(2):297–307
65. Gupta VK, Rastogi A (2008) Biosorption of lead from aqueous solutions by green algae *Spirogyra* species: kinetics and equilibrium studies. *J Hazard Mater* 152(1):407–414
66. Gong R, Ding Y, Liu H, Chen Q, Liu Z (2005) Lead biosorption and desorption by intact and pretreated *Spirulina maxima* biomass. *Chemosphere* 58(1):125–130
67. And EF, Volesky B (1995) Contribution of sulfonate groups and alginate to heavy metal biosorption by the dry biomass of *Sargassum fluitans*. *Environ Sci Technol* 30(1):277–282
68. Chojnacka K, Chojnacki A, Górecka H (2005) Biosorption of Cr^{3+} , Cd^{2+} and Cu^{2+} ions by blue-green algae *Spirulina* sp.: kinetics, equilibrium and the mechanism of the process. *Chemosphere* 59(1):75–84
69. Kumar YP, King P, Prasad VSRK (2007) Adsorption of Zinc from aqueous solution using marine green algae—*Ulva fasciata* sp. *Chem Eng* 129:161–166
70. Sari T (2009) Kinetic and equilibrium studies of biosorption of Pb^{2+} and Cd^{2+} from aqueous solution by macrofungus (*Amanita rubescens*) biomass. *Master* 164:973–979
71. Mehta SK, Gaur JP (2001) Concurrent sorption of Ni and Cu by *Chlorella vulgaris* from a binary metal solution. *Appl Microbiol Biotechnol* 55(3):379–382
72. Davis TA, Volesky B, Mucci A (2003) A review of the biochemistry of heavy metal biosorption by brown algae. *Water Res* 37(18):4311–4330
73. Bashan LED, Bashan Y (2010) Immobilized microalgae for removing pollutants: review of practical aspects. *Biores Technol* 101(6):1611–1627
74. Becker EW (2008) Microalgae: biotechnology and microbiology. Cambridge studies in microbiology. Cambridge University Press, Cambridge
75. Douskova J, Doucha J, Livansky K, Machat J (2009) Simultaneous flue gas bioremediation and reduction of microalgal biomass production costs. *Appl Microbiol Biotechnol* 82:179–185
76. Muñoz R, Alvarez MT, Muñoz A, Terrazas E, Guieysse B, Mattiasson B (2006) Sequential removal of heavy metals ions and organic pollutants using an algal-bacterial consortium. *Chemosphere* 63(6):903–911
77. Kwan TH, Pleissner D, Lau KY, Venus J, Pommeret A, Lin CSK (2015) Techno-economic analysis of a food waste valorization process via microalgae cultivation and co-production of plasticizer, lactic acid and animal feed from algal biomass and food waste. *Biores Technol* 198:292–299
78. Zhang AYZ, Sun Z, Leung CCJ, Han W, Lau KY, Li MJ, Lin CSK (2013) Valorisation of bakery waste for succinic acid production. *Green Chem* 15(3):690–695
79. Leung CCJ, Cheung ASY, Zhang AYZ, Lam KF, Lin CSK (2012) Utilisation of waste bread for fermentative succinic acid production. *Biochem Eng* 65(25):10–15
80. Pleissner D, Lin CSK (2013) Valorisation of food waste in biotechnological processes. *Sustainable Chemical Processes* 1(1):1–6
81. Han W, Ye M, Zhu AJ, Zhao HT, Li YF (2015) Batch dark fermentation from enzymatic hydrolyzed food waste for hydrogen production. *Biores Technol* 191:24–29
82. Han W, Liu DN, Shi YW, Tang JH, Li YF, Ren NQ (2015) Biohydrogen production from food waste hydrolysate using continuous mixed immobilized sludge reactors. *Biores Technol* 180:54–58
83. Han W, Wang XN, Ye L, Huang JG, Tang JH, Li YF, Ren NQ (2015) Fermentative hydrogen production using wheat flour hydrolysate by mixed culture. *Int J Hydrogen Energy* 40(13):4474–4480

84. Han W, Liu DN, Li YF, Zhao HT, Ren NQ (2015) Utilization of wheat for biohydrogen production by a combination of solid-state fermentation and batch fermentation. *Int J Hydrogen Energy* 40(17):5849–5855
85. Han W, Liu ZX, Fang J, Huang JG, Zhao HT, Li YF (2016) Techno-economic analysis of dark fermentative hydrogen production from molasses in a continuous mixed immobilized sludge reactor. *J Cleaner Prod* 127:567–572
86. Gao C, Yan Z, Ding Y, Wu Q (2010) Application of sweet sorghum for biodiesel production by heterotrophic microalga *Chlorella protothecoides*. *Appl Energy* 87(3):756–761
87. Li P, Miao X, Li R, Zhong J (2011) In situ biodiesel production from fast-growing and high oil content *Chlorella pyrenoidosa* in rice straw hydrolysate. *J Biomed Biotechnol*. <https://doi.org/10.1155/2011/141207>
88. Venkata Mohan S, Rohit MV, Chiranjeevi P, Chandra R, Navaneeth B (2015) Heterotrophic microalgae cultivation to synergize biodiesel production with waste remediation: progress and perspectives. *Biores Technol* 184:169–178
89. Hong SJ, Lee CG (2007) Evaluation of central metabolism based on a genomic database of *Synechocystis* PCC6803. *Biotechnol Bioprocess Eng* 12(2):165–173
90. Yang C, Hua Q, Shimizu K (2002) Integration of the information from gene expression and metabolic fluxes for the analysis of the regulatory mechanisms in *synechocystis*. *Appl Microbiol Biotechnol* 58(6):813–822
91. Hamouri BE, Jellal J, Outabih H, Nebri B, Khallayoune K, Benkerroum A, Hajli A, Firadi R (1995) The performance of a high-rate algal pond in the Moroccan climate. *Water Sci Technol* 31(12):67–74
92. Mallick N (2002) Biotechnological potential of immobilized algae for wastewater N, P and metal removal: a review. *Biomaterials Int J Role Metal Ions Biol Biochem Med* 15(4):377–390
93. Hu HY, Li X, Yang J (2009) Coupling of wastewater deep purification and high quality biomass production based on microalgae cultivation. *Ecol Environ Sci* 18(3):1122–1127
94. Fu XN, Yao G (2011) The review of microalgae coupling technology of waste water treatment with biomass energy. *J Green Sci Technol* 11:100–104
95. Kröger M, Müllerlanger F (2012) Review on possible algal-biofuel production processes. *Biofuels* 3(3):333–349
96. Richardson JW, Johnson MD, Outlaw JL (2012) Economic comparison of open pond raceways to photo bio-reactors for profitable production of algae for transportation fuels in the Southwest. *Algal Res* 1:93–100
97. Passos F, Hernández-Maríné M, García J, Ferrer I (2014) Long-term anaerobic digestion of microalgae grown in HRAP for wastewater treatment. Effect of microwave pretreatment. *Water Res* 49:351–359
98. Norvill ZN, Toledo-Cervantes A, Blanco S, Shilton A, Guieysse B, Muñoz R (2017) Photodegradation and sorption govern tetracycline removal during wastewater treatment in algal ponds. *Biores Technol* 232:35–43
99. Posadas E, Morales MDM, Gomez C, Acien FG, Muñoz R (2015) Influence of pH and CO₂ source on the performance of microalgae-based secondary domestic wastewater treatment in outdoors pilot raceways. *Chem Eng J* 265:239–248
100. Lee CS, Lee SA, Ko SR, Oh HM, Ahn CY (2015) Effects of photoperiod on nutrient removal, biomass production, and algal-bacterial population dynamics in lab-scale photobioreactors treating municipal wastewater. *Water Res* 68:680–691
101. Wen S, Liu HY, He HJ, Luo L, Li X, Zeng GM, Zhou ZL, Lou W, Yang CP (2016) Treatment of anaerobically digested swine wastewater by *Rhodobacter blasticus* and *Rhodobacter capsulatus*. *Biores Technol* 222:33–38
102. Shen T, Li JR (2011) Research advances on microalgae culture for sewage treatment. *Modern Agric Sci Technol* 11:266–268
103. Venteris ER, Skaggs RL, Wigmosta MS, Coleman AM (2014) Regional algal biofuel production potential in the coterminous United States as affected by resource availability trade-offs. *Algal Res* 5:215–225
104. Benemann JR (1997) CO₂ mitigation with microalgae systems. *Energy Convers Manag* 38(1):S475–S479
105. Koller M, Salerno A, Tuffner P, Koinigg M, Böchzelt H, Schober S, Pieber S, Schnitzer H, Mittelbach M, Braunnegg G (2012) Characteristics and potential of microalgal cultivation strategies: a review. *J. Clean Prod* 37:377–388

106. Satyanarayana KG, Mariano AB, Vargas JVC (2011) A review on microalgae, a versatile source for sustainable energy and materials. *Int J Energy Res* 10:291–311
107. Ras M, Lardon L, Sialve B, Bernet N, Steyer JP (2011) Experimental study on a coupled process of production and anaerobic digestion of *Chlorella vulgaris*. *Biores Technol* 102:200–206
108. Samson R, LeDuy A (1983) Influence of mechanical and thermochemical pretreatments on anaerobic digestion of *Spirulina maxima* algal biomass. *Biotechnol Lett* 5:671–676
109. Zamalloa C, Boon N, Verstraete W (2012) Anaerobic digestibility of *Scenedesmus obliquus* and *Phaeodactylum tricornutum* under mesophilic and thermophilic conditions. *Appl Energy* 92:733–738
110. Saharan BS, Sharma D, Sahu R, Sahin O, Warren A (2013) Towards algal biofuel production: a concept of green bioenergy development. *Innov Rom Food Biotechnol* 12:1–21
111. Schenk PM, Thomas-Hall SR, Stephens E, Marx UC, Mussgnug JH, Posten C, Kruse O, Hankamer B (2008) Second generation biofuels: high efficiency microalgae for biodiesel production. *Bioenergy Res* 1(1):20–43
112. Mirón AS, Gómez AC, Camacho FG, Grima EM, Chisti Y (1999) Comparative evaluation of compact photobioreactors for large-scale monoculture of microalgae. *J Biotechnol* 70(1–3):249–270
113. Hu HY, Li X (2010) Analysis of key techniques and production potential of biodiesel production based on microalgae with wastewater as resources. *Ecol Environ Sci* 19(3):739–744
114. Singh A, Singh PN, Murphy JD (2011) Mechanism and challenges in commercialization of algal biofuels. *Biores Technol* 102:26–34
115. Hom-Díaz A, Jaén-Gil A, Bello-Laserna I, Rodríguez-Mozaz S, Vicent T, Barceló D, Blázquez P (2017) Performance of a microalgal photobioreactor treating toilet wastewater: pharmaceutically active compound removal and biomass harvesting. *Sci Total Environ* 592:1–11
116. García D, Alcántara C, Blanco S, Pérez R, Bolado S, Muñoz R (2016) Enhanced Carbon, Nitrogen and Phosphorus removal from domestic wastewater in a novel anoxic-aerobic photobioreactor coupled with biogas upgrading. *Chem Eng J* 313:424–434
117. Kuang QJ, Tan YY (2001) Study on the removal of nitrogen, phosphorus and organics by activated algae system. *China Environ Sci* 21(3):23–29
118. Cheng J, Ye Q, Xu J, Yang ZB, Zhou JH, Cen KF (2016) Improving pollutants removal by microalgae *Chlorella* PY-ZU1, with 15% CO₂, from undiluted anaerobic digestion effluent of food wastes with ozonation pretreatment. *Biores Technol* 216:273–279
119. Han W, Yan YT, Gu JJ, Shi YW, Tang JH, Li YF (2016) Techno-economic analysis of a novel bioprocess combining solid state fermentation and dark fermentation for H₂ production from food waste. *Int J Hydrogen Energy* 41:22619–22625
120. Ji M, Yun H, Park S, Lee H, Park Y, Bae S, Ham J, Choi J (2015) Effect of food wastewater on biomass production by a green microalga *Scenedesmus obliquus* for bioenergy generation. *Biores Technol* 179:624–628
121. Heo S, Ryu B, Nam K, Kim W, Yang J (2015) Simultaneous treatment of foodwaste recycling wastewater and cultivation of *Tetraselmis suecica* for biodiesel production. *Bioproc Biosyst Eng* 38:1393–1398
122. Shin DY, Cho HU, Utomo JC, Choi Y, Xu X, Park JM (2015) Biodiesel production from *Scenedesmus bijuga* grown in anaerobically digested food wastewater effluent. *Biores Technol* 184:215–221
123. Singh M, Reynolds DL, Das KC (2011) Microalgal system for treatment of effluent from poultry litter anaerobic digestion. *Biores Technol* 102:10841–10848
124. Cai T, Ge X, Park SY, Li Y (2013) Comparison of *Synechocystis* sp. PCC6803 and *Nanochloropsis salina* for lipid production using artificial seawater and nutrients from anaerobic digestion effluent. *Biores Technol* 144:255–260
125. Han W, Ye M, Zhu AJ, Huang JG, Zhao HT, Li YF (2015) A combined bioprocess based on solid-state fermentation for dark fermentative hydrogen production from food waste. *J Clean Prod* 112:3744–3749
126. Alberto VF, Gisela V, Nelson A, Velasco A (2008) Evaluation of marine algae as a source of biogas in a two-stage anaerobic reactor system. *Biomass Bioenergy* 32(4):338–344
127. Li Y, Zhou W, Zhang X, Sun L (2011) Effect of microalgae culture on treatment of wastewater from anaerobic digested swine manure. *Trans Chin Soc Agric Eng* 27(13):101–104
128. Xu F, Li XY (2013) Research on biogas production technology of anaerobic digestion with blue-green algae. *Environ Sci Manag* 38(1):90–94

129. Passos F, Ferrer I (2014) Microalgae conversion to biogas: thermal pretreatment contribution on net energy production. *Environ Sci Technol* 48:7171–7178
130. Perazzoli S, Steinmetz RLR, Mezzari MP, Nunes EO, da Silva MLB (2013) Biogas production from microalgae biomass III. Simposio Internacional Sobre Gerenciamento De Resíduos Agropecuários E Agroindustriais, 12 a 14 de marco de. São Pedro-Sp 2013
131. Lee K, Chantarasakdakul P, Kim D, Kong M, Park KY (2013) Ultrasound pretreatment for enhanced biogas production of waste algal biomass the 1st IWWG-ARB symposium. Hokkaido University, Japan
132. Ehimen EA, Holm-Nielsen JB, Poulsen M, Boelsmand JE (2013) Influence of different pre-treatment routs on the anaerobic digestion of a filamentous algae. *Renew Energy* 50:476–480
133. Park KY, Kweon J, Chantarasakdakul P, Lee K, Cha HY (2013) Anaerobic digestion of microalgal biomass with ultrasonic disintegration. *Int Biodeterior Biodegrad* 85:598–602
134. Kinnunen V, Craggs R, Rintala J (2014) Influence of temperature and pretreatments on the anaerobic digestion of wastewater grown microalgae in laboratory-scale accumulating-volume reactor. *Water Res* 57:247–257
135. Passos F, Solé M, Garcia J, Ferrer I (2013) Biogas production from microalgae grown in wastewater: effect of microwave pretreatment. *Appl Energy* 108:168–175
136. Chen PH, Oswald WJ (1998) Thermochemical treatment for algal fermentation. *Environ Int* 24(8):889–897
137. Jankowska E, Sahu AK, Oleskowicz-Popiel P (2016) Biogas from microalgae: review on microalgae's cultivation, harvesting and pretreatment for anaerobic digestion. *Renew Sustain Energy Rev* 75:692–709
138. Martin GJO (2016) Energy requirements for wet solvent extraction of lipids from microalgal biomass. *Biores Technol* 205:40–47
139. González-Fernández C, Sialve B, Bernet N, Steyer JP (2012) Thermal pretreatment to improve methane production of *Scenedesmus* biomass. *Biomass Bioenergy* 40:105–111
140. Mendez L, Mahdy A, Demuez M, Ballesteros M, González-Fernández C (2014) Effect of high thermal pretreatment on *Chlorella vulgaris* biomass: organic matter solubilisation and biochemical methane potential. *Fuel* 117:674–679
141. Sialve B, Bernet N, Bernard O (2009) Anaerobic digestion of microalgae as a necessary step to make microalgae biodiesel sustainable. *Biotechnol Adv* 27:409–416
142. González LE, Canizares RO, Baena S (1997) Efficiency of ammonia and phosphorus removal from a Colombian agroindustrial wastewater by the microalgae *Chlorella vulgaris* and *Scenedesmus dimorphus*. *Biores Technol* 60:259–262
143. Chisti Y (2007) Biodiesel from microalgae. *Biotechnol Adv* 25:294–306
144. Diltz R, Pullammanappallil P (2013) Biofuels from algae liquid. *Gaseous Solid Biofuels Convers Tech* 14:432–449
145. Olguin EJ (2003) Phycoremediation: key issues for cost-effective nutrient removal processes. *Biotechnol Adv* 22:81–91
146. Harun R, Singh M, Forde GM, Danquah MK (2010) Bioprocess engineering of microalgae to produce a variety of consumer products. *Renew Sustain Energy Rev* 14:1037–1047
147. Kushwaha JP, Srivastava VC, Mall ID (2011) An overview of various technologies for the treatment of dairy wastewaters. *Crit Rev Food Sci Nutr* 51(5):442–452
148. Labbé JI, Ramos-Suárez JL, Hernández-Pérez A, Baeza A, Hansen F (2017) Microalgae growth in polluted effluents from the dairy industry for biomass production and phytoremediation. *J Environ Chem Eng* 5(1):635–643
149. Torres EM, Hess D, Mcneil BT, Guy T, Quinn JC (2017) Impact of inorganic contaminants on microalgae productivity and bioremediation potential. *Ecotoxicol Environ Saf* 139:367–376
150. Cai ZP, Duan SS, Zhu HH (2012) Recent advance on sewage-microalga-biofuel coupling technology. *Ecol Environ Sci* 21(7):1380–1386
151. Sturm BSM, Lamer SL (2011) An energy evaluation of coupling nutrient removal from wastewater with algal biomass production. *Appl Energy* 88(10):3499–3506
152. Wang L, Li Y, Chen P, Min M, Chen Y, Zhu J, Ruan RR (2010) Anaerobic digested dairy manure as a nutrient supplement for cultivation of oil-rich green microalgae *Chlorella* sp. *Biores Technol* 101:2623–2628
153. Cheng J, Xu J, Huang Y, Li Y, Zhou J, Cen K (2015) Growth optimisation of microalga mutant at high CO₂ concentration to purify undiluted anaerobic digestion effluent of swine manure. *Biores Technol* 177:240–246

154. Liu LL, Huang XX, Wei LK, Zeng BB, Mu LL, Liu ZJ, Cai ZW (2014) Removal of nitrogen and phosphorus by 15 strains of microalgae and their nutritional values in piggery sewage. *Acta Sci Circum* 34(8):1986–1994
155. Li X, Hu HY, Yang J (2010) Lipid accumulation and nutrient removal properties of a newly isolated freshwater microalga, *Scenedesmus* sp. LX1, growing in secondary effluent. *New Biotechnol* 27(1):59–63
156. Wang Y, Ho SH, Cheng CL, Nagarajan D, Guo WQ, Lin C, Li S, Ren N, Chang JS (2017) Nutrients and COD removal of swine wastewater with an isolated microalgal strain *Neochloris aquatica* CL-M1 accumulating high carbohydrate content used for biobutanol production. *Biores Technol* 242:7–14
157. Wang Y, Guo W, Yen HW, Ho SH, Lo YC, Cheng CL, Ren N, Chang JS (2015) Cultivation of *Chlorella vulgaris* JSC-6 with swine wastewater for simultaneous nutrient/COD removal and carbohydrate production. *Biores Technol* 198:619–625
158. Wang H, Xiong H, Hui Z, Zeng X (2012) Mixotrophic cultivation of *Chlorella pyrenoidosa* with diluted primary piggery wastewater to produce lipids. *Biores Technol* 104:215–222
159. Zhu L, Wang Z, Shu Q, Takala J, Hiltunen E, Feng P, Yuan Z (2013) Nutrient removal and biodiesel production by integration of freshwater algae cultivation with piggery wastewater treatment. *Water Res* 47(13):4294–4302
160. Olguín EJ, Dorantes E, Castillo OS, Hernández-Landa VJ (2015) Anaerobic digestates from vinasse promote growth and lipid enrichment in *Neochloris oleoabundans* cultures. *J Appl Phycol* 27(5):1813–1822
161. Levine RB, Costanza-Robinson MS, Spatafora GA (2011) *Neochloris oleoabundans* grown on anaerobically digested dairy manure for concomitant nutrient removal and biodiesel feedstock production. *Biomass Bioenergy* 35(1):40–49
162. Wang B, Lan CQ (2011) Biomass production and nitrogen and phosphorus removal by the green alga *Neochloris oleoabundans* in simulated wastewater and secondary municipal wastewater effluent. *Biores Technol* 102(10):5639–5644
163. Chaiklahan R, Chirasuwan N, Siangdung W, Paithoonrangsarid K, Bunnag B (2010) Cultivation of *Spirulina platensis* using pig wastewater in a semi-continuous process. *J Microbiol Biotechnol* 20(3):609–614
164. Bhatnagar A, Bhatnagar M, Chinnasamy S, Das KC (2010) *Chlorella minutissima*-a promising fuel alga for cultivation in municipal wastewaters. *Appl Biochem Biotechnol* 161(1–8):523–536
165. Van DHS, Vervaeren H, Desmet S, Boon N (2011) Bioflocculation of microalgae and bacteria combined with flue gas to improve sewage treatment. *New Biotechnol* 29(1):23–31
166. Cai ZP, Duan SS (2008) Microalgal biosorption on the heavy metals in polluted waters. *Ecological Science* 27(6):499–505
167. Rugnini L, Costa G, Congestri R, Bruno L (2017) Testing of two different strains of green microalgae for Cu and Ni removal from aqueous media. *Sci Total Environ* 601–602:959–967
168. Hala Y, Sjahrul M (2013) Biosorption of Zn^{2+} and Cd^{2+} in a two-metal system by *Nannochloropsis salina*. *Eur Chem Bull* 2(5):238–241
169. Li YM, Yang HB, Lv FR, Zhang XH, Liu Y, Yu Y (2003) Study on the Purifying trace lead in wastewater by *Dicrateria* sp. *Environ Technol* 21(6):21–24
170. Napan K, Hess D, McNeil B, Quinn JC (2015) Quantification of heavy metals and other inorganic contaminants on the productivity of microalgae. *JoVE (J. Vis. Exp.)* 101:e52936–e52936
171. Mahan CA, Holcombe JA (1992) Immobilization of algae cells on silica gel and their characterization for trace metal preconcentration. *Anal Chem* 64(17):1933–1939
172. Solé-bundó M, Cucina M, Folch M, Tàpias J, Gigliotti G, Garfi M, Ferrer I (2017) Assessing the agricultural reuse of the digestate from microalgae anaerobic digestion and co-digestion with sewage sludge. *Sci Total Environ* 586:1–9
173. Fu HL, Qin J, Chen H (2001) Study on charophytes ability to purify and accumulate the heavy metal ions. *Journal of Sichuan University* 38(2):263–268
174. Wu HS, Zhang HL, Zhang AQ, Wang LS, Wang LJ (2004) Biosorption of heavy metals by *Chlorella*. *Environ Chem* 2:173–177
175. Deng X, Wei B, Hu ZL (2007) Study on heavy metal tolerance of recombinant *Chlamydomonas reinhardtii* and its bioaccumulation to Cadmium ion. *Biotechnology* 17(6):66–68
176. Li C (2011) The application of algae in treatment of waste water containing heavy metal ions. *Plating Finish* 33(2):19–22

177. Yu Z, Song MM, Pei HY, Han F, Jiang LQ, Hou QJ (2017) The growth characteristics and biodiesel production of ten algae strains cultivated in anaerobically digested effluent from kitchen waste. *Algal Res* 24:265–275
178. Pleissner D, Lam WC, Sun Z, Lin CS (2013) Food waste as nutrient source in heterotrophic microalgae cultivation. *Biores Technol* 137(6):139–146
179. Lee JY, Chan Y, Jun SY, Ahn CY, Oh HM (2010) Comparison of several methods for effective lipid extraction from microalgae. *Biores Technol* 101(1):S75–S77
180. Olmstead ILD, Kentish SE, Scales PJ, Martin GJO (2013) Low solvent, low temperature method for extracting biodiesel lipids from concentrated microalgal biomass. *Biores Technol* 148(7):615–619
181. Dong T, Knoshaug EP, Pienkos PT, Laurens LML (2016) Lipid recovery from wet oleaginous microbial biomass for biofuel production: a critical review. *Appl Energy* 177:879–895
182. Kerissen UD, Sen U, Soydemir G, Gurol MD (2014) An investigation of ultrasound effect on microalgal cell integrity and lipid extraction efficiency. *Biores Technol* 152(1):407–413
183. Balasubramanian S, Allen JD, Kanitkar A, Boldor D (2011) Oil extraction from *Scenedesmus obliquus* using a continuous microwave system-design, optimization, and quality characterization. *Biores Technol* 102(3):3396–3403
184. Harrison ST (1991) Bacterial cell disruption: a key unit operation in the recovery of intracellular products. *Biotechnol Adv* 9(2):217–240
185. Samarasinghe N, Fernando S, Lacey R, Faulkner WB (2012) Algal cell rupture using high pressure homogenization as a prelude to oil extraction. *Renew Energy* 48(6):300–308
186. Halim R, Harun R, Danquah MK, Webley PA (2012) Microalgal cell disruption for biofuel development. *Appl Energy* 91(1):116–121
187. Yap BHJ, Dumsday GJ, Scales PJ, Martin GJO (2015) Energy evaluation of algal cell disruption by high pressure homogenisation. *Biores Technol* 184:280–285
188. Zhang F, Cheng LH, Xu XH, Zhang L, Chen HL (2012) Technologies of microalgal harvesting and lipid extraction. *Progress Chem* 24(10):2062–2072
189. Cooney MJ, Young G, Pate R (2011) Bio-oil from photosynthetic microalgae: case study. *Biores Technol* 102(1):166–177
190. Wu Q, Chen H, Han MH, Wang JF, Wang DZ, Jin Y (2006) Transesterification of cottonseed oil to biodiesel catalyzed by highly active ionic liquids. *Chin J Catal* 4:294–296
191. Meher LC, Sagar DV, Naik SN (2006) Technical aspects of biodiesel production by transesterification—a review. *Renew Sustain Energy Rev* 10(3):248–268
192. Li WM, Yao C (2009) Research progress on preparation of biodiesel by transesterification. *Cereal and Food Industry* 16(1):9–13
193. Demirbas A (2008) Biodiesel: a realistic fuel alternative for diesel engines. *El Campo Boletín De Información Agraria* 107(2):99–103
194. Demirbas A (2009) Progress and recent trends in biodiesel fuels. *Energy Convers Manage* 50(1):14–34
195. Kawashima A, Matsubara K, Honda K (2009) Acceleration of catalytic activity of calcium oxide for biodiesel production. *Biores Technol* 100(2):696–700
196. Zhang FQ, Jiu M, Wang LJ (2013) Research progress of biodiesel production technologies. *Academic Periodical of Farm Products Processing* 17:40–42
197. Serio MD, Cozzolino M, Tesser R, Patrono P, Pinzari F, Bonelli B, Santacesaria E (2007) Vanadyl phosphate catalysts in biodiesel production. *Appl Catal A* 320(3):1–7
198. Viola E, Blasi A, Valerio V, Guidi I, Zimbardi F, Braccio G, Giordano G (2012) Biodiesel from fried vegetable oils via transesterification by heterogeneous catalysis. *Catal Today* 179(1):185–190
199. Cerveró JM, Coca J, Luque S (2008) Production of biodiesel from vegetable oils. *Grasas Aceites* 59(1):895–913
200. Kulkarni MG, Dalai AK (2006) Waste cooking oil—an economical source for biodiesel: a review. *Ind Eng Chem Res* 45:2901–2913
201. Abbaszaadeh A, Ghebadian B, Omidkhan MR, Najafi G (2012) Current biodiesel production technologies: a comparative review. *Energy Convers Manage* 63(11):138–148
202. Eckey EW (1956) Esterification and interesterification. *J Am Oil Chem Soc* 33(11):575–579
203. Ma F, Hanna MA (1999) Biodiesel production: a review. *Biores Technol* 70(1):1–15
204. Sun SY, He HY, Wang LY, Yang JC (2005) Production of biodiesel in supercritical methanol. *Fine Chem* 12:916–919
205. Biller P, Ross AB (2011) Potential yields and properties of oil from the hydrothermal liquefaction of microalgae with different biochemical content. *Biores Technol* 102(1):215–225

206. Anastasakis K, Ross AB (2011) Hydrothermal liquefaction of the brown macro-alga *Laminaria saccharina*: effect of reaction conditions on product distribution and composition. *Biores Technol* 102(7):4876–4883
207. Jena U, Das KC, Kastner JR (2011) Effect of operating conditions of thermochemical liquefaction on biocrude production from *Spirulina platensis*. *Biores Technol* 102(10):6221–6229
208. Aresta M, Dibenedetto A, Carone M, Colonna T, Fragale C (2005) Production of biodiesel from macroalgae by supercritical CO₂ extraction and thermochemical liquefaction. *Environ Chem Lett* 3(3):136–139
209. Yin S, Dolan R, Harris M, Tan Z (2010) Subcritical hydrothermal liquefaction of cattle manure to bio-oil: effects of conversion parameters on bio-oil yield and characterization of bio-oil. *Biores Technol* 101(10):3657–3664
210. Zou S, Wu Y, Yang M, Li C, Tong J (2010) Bio-oil production from sub- and supercritical water liquefaction of microalgae *Dunaliella tertiolecta* and related properties. *Energy Environ Sci* 3(8):1073–1078
211. Valdez PJ, Nelson MC, Wang HY, Lin XXN, Savage PE (2012) Hydrothermal liquefaction of *Nannochloropsis* sp.: systematic study of process variables and analysis of the product fractions. *Biomass Bioenerg* 46(46):317–331
212. Costanzo W, Jena U, Hilten R, Das KC, Kastner JR (2015) Low temperature hydrothermal pre-treatment of algae to reduce nitrogen heteroatoms and generate nutrient recycle streams. *Algal Res* 12:377–387
213. Gai C, Zhang YH, Chen WT, Zhang P, Dong YP (2015) An investigation of reaction pathways of hydrothermal liquefaction using *Chlorella pyrenoidosa* and *Spirulina platensis*. *Energy Convers Manage* 96:330–339
214. Yun YM, Cho SK, Jung KW, Kim MS, Shin HS, Kim DH (2014) Inhibitory effect of chloroform on fermentative hydrogen and methane production from lipid-extracted microalgae. *Int J Hydrogen Energy* 39(33):19256–19261
215. Silva CEDF, Bertucco A (2016) Bioethanol from microalgae and cyanobacteria: a review and technological outlook. *Process Biochem* 51(11):1833–1842
216. Ho SH, Chen CY, Chang JS (2012) Effect of light intensity and nitrogen starvation on CO₂ fixation and lipid/carbohydrate production of an indigenous microalga *Scenedesmus obliquus* CNW-N. *Biores Technol* 113(3):244–252
217. Ashokkumar V, Salam Z, Tiwari ON, Chinnasamy S, Mohammed S, Ani FN (2015) An integrated approach for biodiesel and bioethanol production from *Scenedesmus bijugatus* cultivated in a vertical tubular photobioreactor. *Energy Convers Manage* 101:778–786
218. Nguyen MT, Choi SP, Lee J, Lee JH, Sim SJ (2009) Hydrothermal acid pretreatment of *Chlamydomonas reinhardtii* biomass for ethanol production. *J Microbiol Biotechnol* 19(2):161–166
219. Wang H, Ji C, Bi S, Zhou P, Chen L, Liu T (2014) Joint production of biodiesel and bioethanol from filamentous oleaginous microalgae *Tribonema* sp. *Biores Technol* 172(1):169–173
220. Badger PC, Janick J, Whipkey A (2002). Ethanol from cellulose: a general review. *Trends in new crops and new uses. Proceedings of the Fifth National Symposium, Atlanta, Georgia, USA* 17–21
221. Pang T, Liu JG, Lin W, Liu Q (2012) Advances on the algae to bioethanol technologies. *Fishery Modernization* 39(5):63–71
222. Olvera-Novoa MA, Domínguez-Cen LJ, Olivera-Castillo L, Martínez-Palacios CA (2001) Effect of the use of the microalga *Spirulina maxima* as fish meal replacement in diets for tilapia, *Oreochromis mossambicus* (Peters), fry. *Aquac Res* 29(10):709–715
223. Nandeesha MC, Gangadhara B, Manissery JK, Venkataraman LV (2001) Growth performance of two Indian major carps, catla (*Catla catla*) ja: math, and rohu (*Labeo rohita*) ja:math, fed diets containing different levels of *Spirulina platensis*. *Biores Technol* 80(2):117–120
224. Kim SS, Rahimnejad S, Kim KW, Lee KJ (2013) Partial Replacement of fish meal with *Spirulina pacifica* in diets for parrot fish (*Oplegnathus fasciatus*). *Turkish Journal of Fisheries & Aquatic Sciences* 13(13):197–204
225. Benemann JR (1992) Microalgae aquaculture feeds. *J Appl Phycol* 4(3):233–245
226. Liu HF (2001) The application of *Spirulina* in feed industry. *Animal Science & Veterinary Medicine* 2:62–65
227. Teimouri M, Amirkolaie AK, Yeganeh S (2013) The effects of *Spirulina platensis*, meal as a feed supplement on growth performance and pigmentation of rainbow trout (*Oncorhynchus mykiss*). *Aquaculture* 396–399(6):14–19

228. Liu LH, Zheng SX, Xu HX, Chen LQ, Hu ZX (2005) Effects of *Spirulina* in diet on growth, amino acid and fatty acid profile of *Litopenaeus vannamei*. Journal of Fisheries of China 6:791–797
229. Lokapinasari WP, Yulianto AB, Legowo D, Agustono D (2016) The effect of *Spirulina* as feed additive to myocardial necrosis and leukocyte of chicken with avian influenza (H5N1) virus infection. Procedia Chemistry 18:213–217
230. Zhang JM, Liu XN (2005) Varieties and application foreground of available microalgae. Resource Development & Market 1:65–66
231. Wang R, Sun ZB, Shang QK (2005) Study on nutritional value and safety of *Chlorella* powder as feed additive. Feed Review 4:4–7
232. Morris HJ, Carrillo O, Almarales A, Bermúdez RC, Lebeque Y, Fontaine R, Llauradó G, Beltrán Y (2007) Immunostimulant activity of an enzymatic protein hydrolysate from green microalga *Chlorella vulgaris* on undernourished mice. Enzyme & Microbial Technology 40(3):456–460
233. Kralovec JA, Metera KL, Kumar JR, Watson LV, Girouard GS, Guan Y, Carr RI, Barrow CJ, Ewart HS (2007) Immunostimulatory principles from *Chlorella pyrenoidosa*-part 1: isolation and biological assessment in vitro. Phytomedicine 14(1):57–64
234. Zhang C, Meng FP (2007) A study on the technique for culturing marine microalgae with sewage sludge from municipal wastewater treatment plants. Ocean University of China
235. Kanai S, Uto K, Honda K, Hagiwara N, Oda H (2011) Eicosapentaenoic acid reduces warfarin-induced arterial calcification in rats. Atherosclerosis 215(1):43–51
236. Machado RV, Mauricio AF, Taniguti APT, Ferretti R, Neto HS, Marques MJ (2011) Eicosapentaenoic acid decreases TNF- α and protects dystrophic muscles of mdx mice from degeneration. J Neuroimmunol 232(1–2):145–150
237. Figueras M, Olivan M, Busquets S, López-Soriano FJ, Argilés JM (2011) Effects of eicosapentaenoic acid (EPA) treatment on insulin sensitivity in an animal model of diabetes: improvement of the inflammatory status. Obesity 19(2):362–369
238. Iwami D, Nonomura K, Shirasugi N, Niimi M (2011) Immunomodulatory effects of eicosapentaenoic acid through induction of regulatory T cells. Int Immunopharmacol 11(3):384–389
239. Yuan JP, Peng J, Yin K, Wang JH (2011) Potential health-promoting effects of astaxanthin: a high-value carotenoid mostly from microalgae. Mol Nutr Food Res 55(1):150–165
240. Li JQ, Liu HQ, Yuan S (2016) Research progress of microalgae polysaccharide. Modern Chemical Industry 36(6):60–62
241. Halim R, Webley PA, Martin GJO (2016) The CIDES process: fractionation of concentrated microalgal paste for co-production of biofuel, nutraceuticals, and high-grade protein feed. Algal Res 19:299–306
242. Yap BHJ, Crawford SA, Dumsday GJ, Scales PJ, Martin GJO (2014) A mechanistic study of algal cell disruption and its effect on lipid recovery by solvent extraction. Algal Res 5(4):112–120
243. Ma JC, Li Y, Liu ZW, Chen FH, Chen TY (2002) Study on the quality of *Spirulina platensis* cultivated in two kinds of wastewater. Food and Fermentation Industries 1:13–15



Recent Trends in Sustainable Textile Waste Recycling Methods: Current Situation and Future Prospects

Nattha Pensupa^{1,2} · Shao-Yuan Leu³ · Yunzi Hu¹ · Chenyu Du⁴ · Hao Liu^{3,5} · Houde Jing³ · Huaimin Wang¹ · Carol Sze Ki Lin¹ 

Received: 23 December 2016 / Accepted: 27 July 2017 / Published online: 16 August 2017
© Springer International Publishing AG 2017

Abstract In recent years, there have been increasing concerns in the disposal of textile waste around the globe. The growth of textile markets not only depends on population growth but also depends on economic and fashion cycles. The fast fashion cycle in the textile industry has led to a high level of consumption and waste generation. This can cause a negative environmental impact since the textile and clothing industry is one of the most polluting industries. Textile manufacturing is a chemical-intensive process and requires a high volume of water throughout its operations. Wastewater and fiber wastes are the major wastes generated during the textile production process. On the other hand, the fiber waste was mainly created from unwanted clothes in the textile supply chain. This fiber waste includes natural fiber, synthetic fiber, and natural/synthetic blends. The natural fiber is mostly comprised of cellulosic material, which can be used as a resource for producing bio-based products. The main challenge for utilization of textile waste is finding the method that is able to recover sugars as monosaccharides. This review provides an

Chapter 7 was originally published as Pensupa, N., Leu, S-Y., Hu, Y., Du, C., Liu, H., Jing, H., Wang, H. & Lin, C. S. K. Top Curr Chem (Z) (2017) 375: 76. DOI 10.1007/s41061-017-0165-0.

✉ Carol Sze Ki Lin
carollin@cityu.edu.hk

- ¹ School of Energy and Environment, City University of Hong Kong, Tat Chee Avenue, Kowloon, Hong Kong
- ² Department of Agro-Industry, Faculty of Agriculture, Natural Resources and Environment, Naresuan University, Phitsanulok 65000, Thailand
- ³ Department of Civil and Environmental Engineering, The Hong Kong Polytechnic University, Kowloon, Hong Kong
- ⁴ School of Applied Sciences, University of Huddersfield, Huddersfield, UK
- ⁵ State Key Laboratory of Pulp and Paper Engineering, South China University of Technology, 510640 Guangzhou, China

overview of valorization of textile waste to value-added products, as well as an overview of different strategies for sugar recovery from cellulosic fiber and their hindrances.

Keywords Bioconversion · Hydrolysis · Pretreatment · Recycling · Textile waste · Valorization

1 Introduction

1.1 The Global Textile Market

The textile industry is one of the oldest and the largest industries in the world [1]. With the increase of world's population, there is an increase in the demand for textile products. In 1950, the FAO reported that 3.7 kg of textile fiber per person has been consumed and the figure continuously increased to 11.1 kg of fiber per person in 2007 [2, 3]. The great demand will, of course, lead to a high volume of textile fiber production. Around 70.6 million tons of textile fibers were produced worldwide in 2007 and the production trend was gradually increased to 90.8 million tons of textile fibers in 2014 [4]. The global textile and apparel market is predicted to grow at a compound average growth rate of 3.7% per year and to exceed 100 million tons by 2025 [5, 6].

Textile industry enlargement has a significant influence on the global economy. In 2002, industrial textile trade accounted for \$400 billion worldwide, representing 6% of world trade [7]. In 2012, the industrial textile trade increased to \$1.8 trillion dollars worldwide [8]. China and India are the top two textile producers worldwide. China is the world's largest clothing exporter, in which the textile industry accounts for around 54% of the world's total production. China's industrial textile value reached \$755 billion in 2012, which was 12.7% higher than in the previous year [9]. Meanwhile, Indian textile trade value is \$108 billion dollars, which contributes to around 4% of Indian gross domestic product (GDP) [10]. So far, the United States is the biggest importer of textile products. Their textile import value was approximately \$151 billion in 2012 [8].

Natural fiber has been introduced as a raw material for the textile production in prehistoric times [2]. It has been a dominant material in the textile industry for many years. In the 1800s, scientists created synthetic fibers such as viscose, rayon, nylon, and polyester. These synthetic fibers have affected the natural fiber production and trends in consumption. Forsythe and Thomas [11] reported that cotton blended with synthetic fiber has higher customer preference compared with mono-fiber textiles. This led to an increasing demand for synthetic fiber in textile production. During 2007 to 2010, the demand for synthetic fiber increased by 4.3 million tons with market share expanding from 55.5 to 60.1%, while other fiber consumption, such as cotton, wool, and cellulosic fiber decreased to 1.7, 0.28, and 0.38 million tons, respectively [12]. Synthetic fiber production nowadays is greater than that for

natural fibers [2]. Therefore, synthetic fiber is another material that needs to be focused on.

In summary, the current textile global market is mainly derived an apparel product with the synthetic fiber. The increasing household outcomes, particularly, in developing countries is promoting the development of the textile market [13]. A new pattern of consumption has appeared in recent years, for example, fast fashion strongly influences the purchase of textile products. Therefore, the increasing consumption of the textile and the apparel is a foreseeable future.

1.2 Textile waste and its environmental problems

Textile industry enlargement affects the environment, as around 10–20% of all textile products are considered to be wasted [14]. The annual textile waste in China, the United Kingdom, and the United States is estimated to be 26.0, 1.0, and 12.4 million tons, respectively [4, 15, 16]. In Hong Kong, the situation is also serious, and approximately 293 tons of textile waste are generated daily [17]. Fast fashion leaves a pollution footprint on which each step in textile life cycle carries potential environmental problems and hazards [18]. Furthermore, textile production processes require a high volume of water, energy, and chemicals. The growth of the textile industry has led to a subsequent increase of textile waste. Textile waste can be categorized into two main groups, i.e., *pre-consumer textile waste*, which is the waste generated during the textile production processes; and *post-consumer textile waste*, which is the waste created during consumer use and disposal. The pre-consumer textile waste component is related to the textile raw material, since the raw material to produce textiles can be classified into three main groups, which are *cellulose fiber*, *protein fiber*, and *synthetic fiber* [19]. Cellulose fiber is made from plant materials such as cotton, flex, hemp, and ramie. Protein fiber is produced from animals including wool, angora, cashmere, and silk, and synthetic fiber is made from petroleum-based chemicals such as polyester, nylon, spandex, acrylic, and polypropylene. Each type of raw material needs a specific kind of dyeing chemicals and materials in the production process, and therefore its by-product would create another stream of textile waste.

Cotton is one of the main raw materials among all fiber types owing to its large share in the textile market [20]. Around 25 million tons of cotton was produced annually, and 24% of total cotton production are grown in China [21]. This makes China the top ranking cotton producer in the world (Table 1), but most of the cotton is used domestically, due to the high demand for cotton in the textile industry. Cotton cultivation requires a high input of water, pesticides, insecticides, and fertilizers in order to obtain high productivity, and this has a negative effect on the environment.

The textile-production process using cotton as a raw material starts with cotton fiber being spun into yarn. The yarn is then converted into fabric by weaving or knitting, which is then dyed and printed. Therefore, the pre-consumer textile waste of cotton textile products is cotton gin trash during the preparation of yarn and thread, the dyeing material, and chemicals that dissolve in the wastewater, which are capable of harming human health and having a negative effect on the environment.

Table 1 Top ten cotton-producing countries in 2015/2016 (in thousands of metric tons) [21]

Rank	Country	Year			
		2010	2012	2014	2016
1	China	5970	6281	6532	5748
2	India	5683	6071	6426	4790
3	United States	3941	3413	3553	2806
4	Pakistan	1869	2312	2308	1524
5	Brazil	973	1673	1524	1285
6	Uzbekistan				827
7	Turkey				577
8	Australia				566
9	Turkmenistan				294
10	Burkina				239


The post-consumer textile waste is mainly disposed clothes, which contain a mixture of materials. Since the post-consumer textile waste is not easily decomposed [22], it accumulates and occupies space, and may lead to infectious diseases, attract pests, and spread odors in the environment. Therefore, these can cause environmental problems without proper waste management [23, 24].

1.3 Textile Waste Management

Currently, the eco-fashion market has attracted a great deal of attention, which indicates the rising concerns of textile consumers on environmental friendly fashion products [25]. Consequently, the environmental performance of textile manufacturers and suppliers is under unprecedented attention. The environmental management system (EMS) is one of the criteria in green textile strategies [26, 27]. In 1990, the International Organization of Standardization (ISO) has set up ISO 14000 to the textile process for identification, measurement, and control of environmental impact that may cause from any activity in the production chain [28]. Waste management is an important procedure in that system. Textile waste management has played an important role in order to prevent the expansion of textile waste. The idea of textile management is to prevent waste. Waste prevention refers to reducing the quantity of waste and using harmless substances as materials in the production process. Since the 1990s, numerous EMS have been developed for textile customers to assess the suppliers' operational performance, for example, the Green Dragon Environmental Management Standard in the UK and Global Recycling Standards for textiles and clothing [29]. By 2014, over 324,148 textile firms/suppliers distributed in 155 countries had adopted ISO 14000 [30].

Textile waste can be classified into two main groups by physical characteristics, which are wastewater and solid waste. Their chemical compositions and waste-management methods are presented in Sects. 2 and 3.

Fig. 1 The textile production process

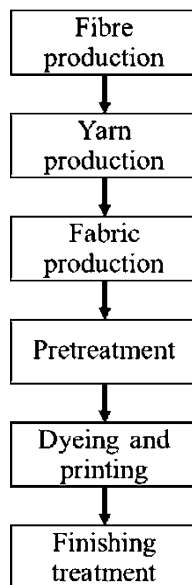

2 Wastewater from the Textile Industry

2.1 Chemical Composition

The textile industry is one of the top three water-wasting industries in China: around 2.5 billion tons of wastewater were discharged every year [9]. About 700 l of water are used to produce 1 kg of textile [31]. Water is used to rinse or remove unwanted chemicals out of the fabric and it also uses as a chemical carrier to the fiber. Around 17–20% of industrial water pollution is contributed by the textile industry [32].

The quantity of chemicals found in the effluent from the textile production process is related to the type of fiber and its processing method. In order to characterize the chemical compounds in the wastewater from the textile industry, understanding the production process of a textile product is necessary. As shown in Fig. 1, the production process can be divided into six steps: fiber production, yarn production, fabric production, pretreatment, dyeing and printing, and finishing treatment.

2.1.1 Fiber Production

The chemicals used in the fiber production of each type of fiber are different. For cellulose fiber production, the chemicals that are normally used are pesticides, insecticides, and fertilizers, where natural resources are not sufficient for growing plants. While the protein fiber required the chemical to control parasites in animals and after the fiber has been shredded, the scouring chemicals to clean the fiber are

needed. For synthetic fiber production, the petroleum oil is used as a feedstock. Pigment and dyes are normally applied in this step.

2.1.2 Yarn Production

The fiber is then spun into yarn. This step needs spinning oil in order to increase the strength of the fiber and reduce the friction force during spinning.

2.1.3 Fabric Production

Fabric is made from knitting or weaving the yarn. The sizing chemical and lubricant are added for preventing the yarn from breaking during the process.

2.1.4 Pretreatment

The pretreatment is a step that prepares the fabric for the dyeing process. This step contains multiple processes, such as de-sizing, scouring, bleaching, and mercerizing. The de-sizing process aims for removal of the sizing chemical (starch) and improvement of absorbency. The sizing chemical is removed by dilute mineral acid (0.25–0.5%) or oxidative agents are applied. However, the de-sizing chemical may affect cellulose fiber in cotton fabric. Therefore, an environmentally friendly de-sizing agent, such as amylase enzyme, is applied in order to remove the sizing agent without fiber damage. Then the washing process is carried out to remove dirt and impurities. The wax, fats, pectin, and lubrication oil are removed by using hot aqueous sodium hydroxide together with the surfactant in scouring process. Before the dyeing and printing step, a bleaching process is required in order to achieve the degree of desired whiteness of the fabric. The common chemical agents used in the bleaching process are sodium hypochlorite, sodium chlorite, and hydrogen peroxide. These oxidative agents can degrade cellulose in cotton fabric as well as decolorize the cotton [33]. Therefore, bio-bleaching by using peroxidase enzymes (DeniLite enzyme) process was created. This process can improve the durability of textiles due to the mild condition of bleaching process [34]. Lastly, a high concentration of sodium hydroxide (18–24%) is usually used in the mercerizing process to improve fabric properties, for instance, tensile strength, fabric hygroscopicity, dye absorbency, luster, and dimensional stability [35]. The strong alkali in the mercerization process causes fiber swelling, untwisting of fiber, and reorientation of cellulose structure leads to improved fabric properties.

This pretreatment step requires a number of chemicals, such as detergents, bases, solvents, enzymes, and bleaching reagents to make the fabric more suitable for dyeing and printing.

2.1.5 Dyeing and Printing

Several chemicals have been commonly used in dyeing and printing processes. Jegatheesan et al. [36] reported that around 700,000–1,000,000 tons of dyes was used for the textile industry and 280,000 tons of dye was disposed into the textile

Table 2 Fiber, their specific dye type, and the amount of unfixed dye in wastewater stream [37]

Fiber	Dye type	Unfixed dye (%)
Wool and nylon	Acid dyes/reactive dyes for wool	7–20
	Pre-metallized dyes	2–7
	After chromes	1–2
Cotton and viscose	Azoic dyes	5–10
	Reactive dyes	20–50
	Direct dyes	5–20
	Pigment	1
	Vat dyes	5–20
	Sulfur dyes	30–40
Polyester	Disperse	8–20
Acylic	Modified basic	2–3
Polypropylene	Spun dyed	N/A

N/A data is not available

wastewater. Dyes and chemicals used in the textile industries are specific for different type of fiber (Table 2). Cellulose fiber requires reactive dyes, direct dyes, naphthol dyes, and indigo dyes, while protein fiber prefers acid dyes and Lanaset dyes. Dispersed dyes, basic dyes, and direct dyes are used to dye synthetic fibers [19]. Hasanbeigi [37] reported that almost 80% of dye can stay on the fabric, and the typical dyes found in textile wastewater are shown in Table 2. Binders and polymeric resins are used to enhance the binding of the pigments in the fabric matrix, and then the unfixed pigments are removed by detergents (i.e., alkylaryl-sulfonates, sulfated alkylphenolpolyglycols, alkylphenol ethoxylates, sodium palmitate, and sodium stearate) in the washing process. The chemicals discharged into the water are one of the huge environmental problems as they can cause hemorrhage, ulceration of skin, nausea, severe irritation of skin, and dermatitis [19]. Additional environmental impacts include an increase of biochemical oxygen demand (BOD) and chemical oxygen demand (COD) and blockage of sunlight, and subsequently an effect on the growth of photoautotrophic microorganisms. Therefore, the unfixed dyes in the wastewater need decolorization and detoxification before disposal into the environment.

2.1.6 Finishing Treatment

This step is a process that adds a special property to the fabric, such as flame retardance, enhanced water resistance, and antibacterial treatment by using specialty chemicals. For example, halogenate or phosphor bases are added to generate flame-retardant fabric, whereas wax or silicone are added to improve water resistance of fabric.

These specialty chemicals used in the finishing treatment are shown in Table 3. These chemicals are applied to coat the fabric, and the residues after the coating

Table 3 Specialty chemicals used in the finishing treatment step [38]

Fabric property	Chemicals
Handle modification	Softeners: polyethylene, quaternary ammonium compounds, silicones, and polyurethanes Stiffeners: starches resins, polyvinyl acetate, polyvinyl alcohol
Crease resistance (anti-wrinkling, easy care)	Formaldehyde based
Antistatic treatment	Cationic softeners, polyglycols
Anti-pilling	Resins
Antibacterial/anti-odor treatment	Biocides such as silver, triclosane
Water repellence	Waxes, silicones, fluorocarbons
Oil/soil repellence	Oil/soil repellents based on fluorocarbons
Flame retardance	Flame retardants: halogenated or phosphor based
Protective coatings	Acrylates, polyurethanes, silicones, PVC with plasticizers
Garment treatments for fashion	Potassium permanganate, sodium hypochlorite, calcium hypochlorite, sodium hydrosulfite, potassium dichromate, formaldehyde resins, cationic softeners, cationic silicone softeners

process are discharged as an effluent. Consequently, this leads to environmental pollution.

In summary, the wastewater from the textile production process contains a variety of chemicals, such as dyes and chemicals that used in the process. Ammonia nitrogen and urea are from dyes, raw material, and process (Batik fabric production process requires urea). The typical total nitrogen is around 300 mg/l [39]. Phosphorous in wastewater come from phosphor detergent used in washing and scouring. Sulfide is another compound that is usually found in wastewater. It originates from sulfur, which is a kind of cheap and qualified dye. When oxygen has been removed, sulfur is converted into sulfide [40]. Sulfide is very toxic to the environment, and therefore it has been banned in some countries. In general, the wastewater from the textile industry is characterized by high value of BOD (>200 mg/l), COD (>700 mg/l), pH (>11) and color [41–43]. Moreover, in the process of pretreatment, the pH of dyeing wastewater remains between 10 and 11 when treated by alkali. This chemical's intense condition is harmful to marine life.

2.2 Textile Wastewater Management

Textile production consumes a high volume of water. Depending on the production process, 200–700 l of water could be used to produce 1 kg of fabric [19, 31]. The water is used for applying chemicals onto a textile and rising unwanted chemicals from a textile product. Wastewater from the textile industry contains a high level of chemical compounds. Therefore, wastewater treatment is required to reduce the chemical concentration before disposal to the environment.

2.2.1 Wastewater Treatment

Wastewater treatment can be classified into three techniques, which are physical treatment, chemical treatment, and biological treatment. Each techniques suitable for specific compounds. Most of the dyes used in textile processes are non-biodegradable compounds, therefore, physical and chemical treatments are applied. While the textile wastewater also contains high values of COD and BOD, the presence of particulate matter, oil, and grease in the effluent, can be eliminated by combining all physical treatment, chemical treatment, and biological treatment techniques together.

Physical treatment. Physical treatment is always the first step in wastewater treatment. The effluent from the textile industry contains suspended solids, excessive quantities of oil, grease, and gritty materials. Therefore, the effluent needs to pass through a coarse screened sieve for the removal of large-sized materials such as yarns, lint, pieces of fabrics, and fibers. Then a fine sieve is applied to screen the suspended particles out of the effluent.

Floating particles are removed by mechanical flocculation. This method uses a paddle to stir the effluent at low mixing rate. The small particles bind together and form heavier particles, which can be settled and subsequently removed.

Membrane filtration is an alternative to clarify the textile effluent. It has the ability to remove some particles including dyes from the textile effluent. However, this technique is non-economical, because the membrane may be at risk of clogging, resulting in membrane displacements.

Sun et al. [44] studied wastewater treatment by using radiation. Results showed that the COD value of wastewater decreased from 211.7 to 182.8 mg/l by applying 12 kGy of electron beam radiation.

Chemical treatment. The first step to treat the textile dyeing wastewater is to adjust its pH value, since most dyeing water is alkaline. Multivalent cations are added for neutralization. Then coagulation/flocculation agents are applied to settle the floating particles and decolorize the textile wastewater.

Alum (aluminum sulfate) and ferric chloride are common chemicals used in the coagulation/flocculation process. Over 89% of phosphorous from the effluent and 10–100 mg/l of suspended solids are removed when 90 mg/l of alum and ferric chloride are added [45]. Polyaluminium chloride (PACl), polyaluminium ferric chloride (PAFCl), polyferrous sulfate (PFS), and polyferric chloride (PFCI) are also effective chemicals used in the coagulation/flocculation of wastewater [46].

Ozonation is another technique to degrade organic compounds. Ozone is a strongly oxidizing agent. It forms a reaction at $-OH$ group in the chemicals present in the effluent. This results in reducing COD, color, toxicity, and pathogens, and improves wastewater biodegradability and the coagulation-flocculation processes [47]. Roy et al. [41] reported that ozone treatment with $40 \text{ g O}_3/\text{m}^3$ for 30 min can reduce the COD value from 203 to 123 mg/l.

Fenton reaction is a chemical treatment process that uses an oxidizing agent to break down toxic chemicals that cannot be degraded in nature. Hydrogen peroxide (H_2O_2) is normally added in order to generate hydroxyl radicals. Then acidic solution ($\text{pH} = 2\text{--}3$) containing Fe^{2+} ions is added. This is called a “Fenton

reaction". Lin and Peng [48] reported that the Fenton reaction has the ability to reduce the COD in textile wastewaters by approximately 80%.

Biological treatment. Physical and chemical treatments such as membrane filtration, coagulation, and chemical oxidation are conventional techniques that are normally used to remove unwanted materials from the effluent [49]. These techniques also have drawbacks, such as high cost and also generate toxic intermediates. Biological treatment is an alternative way to clean the wastewater. Biological treatment is a process that use enzymes or whole cells from microorganisms to degrade or remove the unwanted compounds from the textile wastewaters [50]. Generally, biological treatment is placed after physical and chemical treatment, as it requires a mild operation condition. Babu et al. [43] reported that most chemicals used in the finishing step are eliminated by adsorption or sedimentation in the biological treatment. However, some microorganisms such as *Galactomyces geotrichum*, *Saccharomyces cerevisiae*, and *Trichosporon beigelii* can degrade dye substances under anaerobic condition [49, 51–53].

Fu and Viraraghavan [54] reported a promising biological treatment process using microorganisms that has a high potential for dye removal. Most biological treatment processes use monoculture to absorb dyes from wastewater [50, 55–58]. Przysa et al. [59] investigated biological treatment by using a mixture of fungal species (*Pleurotus ostreatus*, *Gloeophyllum odoratum*, and *Fusarium oxysporum*). The result showed that after 96 h of treatment, the mixtures of fungal strains were less effective in the dye-removal process than single strains used separately. Monoculture of *P. ostreatus*, *G. odoratum*, and *F. Oxysporum* resulted in 95.5, 84.6, and 79.2% of dye removal, respectively. The co-culture of *P. ostreatus* and *G. Odoratum* removed 74.3% of dyes, while the co-culture of *P. ostreatus* and *F. oxysporum* removed only 32.2% of dyes. The efficacy of dye removal is related to many factors such as, microbial species, hazardous chemical substances present in the effluent, operating conditions, and retention time.

Abadulla et al. [60] proposed the biological treatment of using laccase to remove dyes in textile wastewater. *Trametes hirsuta* and a purified laccase were used to degrade triarylmethane, indigoid, azo, and anthraquinonic dyes. The results showed that up to 80% of anthraquinonic dyes were removed from the waste effluent. The laccase enzyme in biological treatment has a high decolorization rate, but it cannot degrade all reactive dyes. Since laccase is an enzyme, high anionic strength conditions may lead to enzyme deactivation. Tauber et al. [61] applied laccase with ultrasound technique to improve the decolorization rate. Results showed higher dye degradation rates when combining these two techniques. Laccase demethylated the dye (Acid Orange 52) and the ultrasound attacked the –OH group in the dye compound.

The biological process includes aerobic, anaerobic, and combinations of these two that can be subdivided into suspended and attached growth systems. However, these processes require a large amount of space for storage and a long retention time compared to physical and chemical treatments [62].

Another way to deal with wastewater issues is to avoid using harmful substances in the textile production process [63]. Kant et al. [32] proposed a green textile production concept which applies harmless or biodegradable substances in the

process, for instance, applying a natural material such as olive mill wastewater, rutin (flavonoid), fennel leave, and mangrove bark as natural dye in dying process [64–67]. In the bleaching step, hydrogen peroxide or ozone are applied instead of chlorine, which is a strongly toxic chemical generated during the bleaching step. Since it can operate in cool conditions and ozone can increase oxygen and water into the wastewater [32]. Furthermore, bio-bleach or enzyme treat on textile is an alternative way to support green textile concept [68]. Bees wax, aloe vera, and vitamin A are good finishing agents in terms of flame retardance in the finishing step. Potato starch or carboxymethylcellulose can be used as a sizing agent instead of polyvinyl alcohol (PVA) [32]. The development of this idea requires more exploration.

3 Solid Waste from Textile Industry

3.1 Chemical Composition

The pre-consumer textile wastes in the textile production process are shown in Table 4. The solid form of pre-consumer textile waste contains biodegradable substances such as fiber waste, yarn waste, fiber lint, and fabric scrap. These substances can be recycled into new raw materials and they can decompose in nature, since they are organic matter.

The post-consumer textile waste is a mixture of natural fibers, synthetic fibers, and other substances, such as metallic zippers, acrylic buttons, wood buttons, shell buttons, and metallic snap fasteners, which make it hard to degrade [69]. Post-consumer textiles can be reused, but they mostly go to municipal landfill or incineration. These textiles accounted for about 13 million tons of the solid waste but only 15% was recovered in 2010 [70, 71]. Although textile waste contains organic substances, landfill of textile waste requires space and takes a relatively long time to decompose (6 months–20 years) [72, 73]. The degradation rate is related to the fabric component and landfill environment [72]. Cotton fabric showed 50–70% weight loss after 3 months of landfill [74] and wool takes 6 months to decompose [75]. Synthetic fibers, especially polyester, is a biodegradable-resistant fiber. There was no evidence of microbial degradation found after 4 weeks of landfill under by Fourier transform infrared spectroscopy observation [76] and only 20% weight loss was shown after 3 months of landfilling [74]. Furthermore, landfilling may release toxic substances, and it can generate methane, which contributes to the global warming issue. Therefore, these accumulated wastes lead to an environmental problem.

The conventional method for treatment of solid waste from textile industry is landfill or incineration [77]. However, this treatment is not favor, in some area of Europe (Germany, Austria, Sweden, Denmark, Belgium, the Netherlands, and Switzerland) and North America since the releasing leachate from textile landfill may contaminate the surface water and underground water source may cause adversely affect human health [14]. Furthermore, the methane formation during decomposing of organic substance can cause greenhouse gas emissions.

Table 4 Examples of waste materials generated during the cotton textile production process [35, 43]

Step	Process	Wastewater	Solid wastes
Fiber preparation	Fiber preparation	Little or no wastewater generate	Fiber waste
Yarn production	Yarn production	Spinning oil	Sized yarn, fiber waste, cleaning and processing waste
Fabric production	Sizing	BOD, COD, metals, cleaning waste, size	Fiber lint, yarn waste
	Knitting/weaving	Little or no wastewater generated	Yarn and fabric scraps, off-spec fabric
Pretreatment	Desizing	BOD from water-soluble sizes, synthetic size, lubricants, biocides, anti-static compounds	Fiber lint, yarn waste, cleaning materials such as, wipes, rags, and filters, cleaning and maintenance wastes containing solvents
	Scouring	Disinfectants and insecticide residues, NaOH, detergents, fats, oils, pectin wax, knitting lubricants, spin finishes, spent solvents	Little or no solid waste generated
	Bleaching	Hydrogen peroxide, sodium silicate, or organic stabilizer, high pH	Little or no solid waste generated
	Mercerizing	High pH, NaOH	Little or no solid waste generated
Dyeing and printing	Dyeing	Metals, salt, surfactants, toxics, organic processing assistance, cationic materials, color, BOD, sulfide, acidity/alkalinity, spent solvents	Little or no solid waste generated
	Printing	Suspended solids, urea, solvents, color, metals, heat, BOD, foam	Little or no solid waste generated
Finishing	Finishing	BOD, COD, suspended solids, toxics, spent solvents	Fabric scraps and trimmings

Incineration is another practical treatment that is widely used to handle textile waste since textile wastes have high energy contents [78]. However, incineration may cause dioxin emissions during a high-temperature process. The dioxin has long term accumulated in environment and food chain. This group of chemicals was found to have an adverse effect on human health such as damage to the immune system, interference with the hormone system, and also in causing cancer [79]. This led to the conclusion that textile incineration has a high potential to produce toxic compounds. Even though this treatment can reduce 95–96% of waste mass, toxic compound formation is still an environmental concern.

In order to minimize textile waste and prevent the expansion of textile waste, simple waste management such as recycling can be applied. Recycling is another strategy that can reduce the waste stream and generate an alternative income at the

Table 5 Recycled products from textile waste

Substrate	Product	Reference
Lyocell fabric (modified cellulose)	Adsorbent fiber for heavy metal adsorption	[82]
Cotton and textile ash wastes	Bricks	[81]
Cotton and limestone powder wastes	Bricks	[83]
Textile waste ash and basaltic pumice	Bricks	[84]
Cotton waste	Chipboards	[85]
Waste cotton fibers	Nanoparticle	[86]
Waste cotton fabrics	Microcrystalline cellulose	[87]
Waste cotton fibers	Thermoplastic matrix	[88]
Cotton/polyester blend fabrics	Reinforced composites	[89]
Cotton waste fiber	Reinforced composites	[90]
Woven fabric	Reinforced composites	[91]
Plain woven PET and cotton (65/35%) fabrics	Composites	[92]
Waste cotton fabrics	Composites	[93]

same time. The pre-consumer textile waste; by product from textile production process such as cotton residues, wool residues, yarn residues and fiber residues has a potential to be recycled. It can be used as a raw material to produce other products or it can go to reprocess again. However, reprocessing may decrease yarn properties. Wanassi et al. [80] reported that recycled cotton yarn has shorter fiber than new yarn and therefore the recycled cotton yarn has less tensile strength compared to new cotton yarn. On the other hand, post-consumer textile waste is a mixture substance. The recycling of post-consumer waste is first categorized by type of material, as textile waste may contain a cotton, wool, silk, nylon, olefin polyester, and other materials like button, metal hooks, and plastic materials. The categorized wastes are sold for recycling industry or for clothing reprocess. The cotton waste is sold to brick kilns factories [81, 82]. Pure cotton waste can be used to produce medical textiles and superabsorbent polymer. Wool residues are normally recycled by blending with new wool to create new textile products. The metal scrap is sold in the junk market from where it is resold to recycling industries. The plastic material is sold to chemical industries for refilling. There are many products that are made from textile waste (see Table 5). For example, composite material is normally produced from textile waste due to textile waste in brick may increase tensile strength into material. Moreover, brick production has less concern about organic content and heavy metal in the material. Adsorbent material is another product that is usually made from textile waste since the original properties of fiber are suitable for absorption. After being modified by physicochemical methods, it gains more absorption efficacy. A more detailed explanation about textile recycling is provided in Sect. 5.

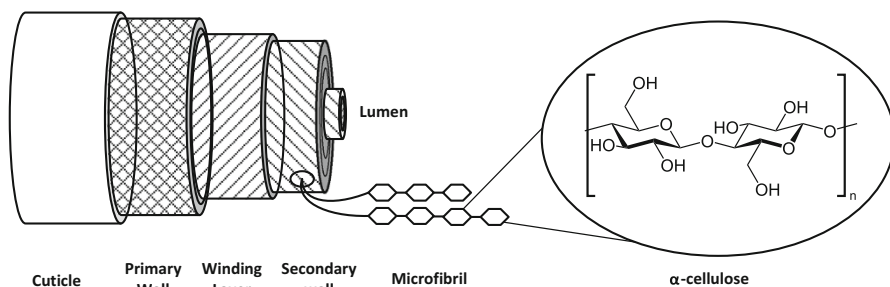


Fig. 2 Microstructure of the cotton fiber at various scales (the dimension of the cell wall is not to scale; the direction of microfibril alignment is not based on a real image). This diagram was re-plotted based on the previous publications of Anderson and Kerr [95] and Gordon and Hsieh [22]

4 Enzymatic Hydrolysis of Cellulose

4.1 Basic Structure of Cellulose

Cotton is the most widely used natural fiber in textile products [12]. Cotton fibers are collected from the boll of the *Gossypium* genus plants [94]. The basic structure of the native cotton fiber is shown in Fig. 2. A cotton fiber is a very long plant cell constructed within a multi-layered cell wall structure. The microstructure and the fundamental physiochemical characteristics of the layered cotton fiber cell wall have been investigated in detail previously [22, 95]. In summary, lumen is originally the “living” part of the cell, filled with liquid and protected by the cuticle, primary wall, winding, and secondary walls. In each layer of the cell wall, the microfibrils form into spiral bundles and align at different directions corresponding to the fibril axis of the cotton cell [94, 95]. The mature cotton fibers are dried cells, in which the lumen becomes a hollow space inside the collapsed cell wall.

The major constituent of the cotton fiber is α -cellulose, which contributes to nearly 100% of the secondary wall (i.e., with a high degree of polymerization, DP of 14,000) and 30% in the primary wall of the cotton fiber (i.e., DP between 2000 and 6000). The rest of the components are hemicelluloses and other trace elements [22].

The long cellulose chains are constructed in different orders in the microfibrils as illustrated in Fig. 3a. In the crystalline zone, cellulose chains are well organized and linked among each other under a specific order by hydrogen bonds and van der Waals forces; and an amorphous structure of which the microfibrils are twisted or less ordered [96]. Amorphous cellulose is more easily hydrolyzed by cellulase and has often been considered the “weak points” of the cellulose fiber in higher plants [97].

4.2 Cellulase

Cellulase is generated from various types of bacteria and fungi, such as *Cellulomonas fimi* and *Thermomonospora fusca* [98], and filamentous fungi belonging to the genera *Trichoderma* (i.e., *T. viride*, *T. longibrachiatum*, *T. reesei*)

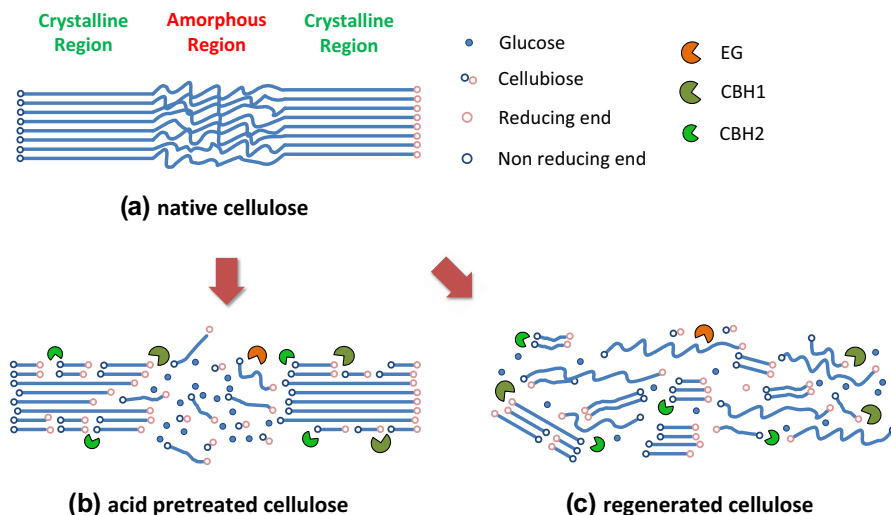


Fig. 3 Schematic diagram of the enzymatic hydrolysis processes of the native cotton cellulose before pretreatment (a); cellulose after acid pretreatment (b); and regenerated cellulose after freezing soda pretreatment (a hypothetical phenomenon generated based upon the dissolution-regeneration mechanisms) (c)

and *Aspergillus* [99]. *Trichoderma* is the most widely studied fungal genera for commercial production of cellulase [100–102].

Cellulase is an enzyme complex that is composed of several monoenzymes, i.e., β -1,4-endoglucanases (EGs), exoglucanase or β -1,4-cellobiohydrolase (CBH), and β -glucosidase (BGs), which are highly specified for enzymatic hydrolysis of cellulose [103, 104]. Some of the key cellulases and their affecting areas to the cellulose fiber are shown in Fig. 3. The synergetic reaction of enzymatic hydrolysis has been detailed in many studies [103, 105]. Briefly, EGs are reactive in cleaving the β -1,4-glucosidic bonds when binding randomly with the amorphous cellulose. This reaction creates new chain ends in the microfibrils. CBH (including CBHI and CBHII to target on the reducing end and non-reducing ends of the cellulose chain, respectively) further cut the bonding along the chain and gradually release the cellobiose in the hydrolysate. Finally, BGs hydrolyses the cellobiose into glucose.

4.3 Factors Hindering the Enzymatic Hydrolysis

As enzymatic hydrolysis is carried out by the enzymes complex the efficiency and product yield of the synergetic reaction follows the basic criteria like all the heterogeneous catalytic reactions. Cellulase needs to bind with the specific site on the cellulose first and then the reaction can take place [106]. The specific binding sites on the cellulose fibers need to be as “accessible” as possible to the correlated cellulase [107]. Meanwhile, the function and reactivity of the enzymes (e.g., the mass ratios of the three basic cellulases, as mentioned in Sect. 4.2) should match the properties of the substrate, and the hydrolysis should be carried out under the

appropriate environment, i.e., appropriate pH and temperature [108]. The key factors affecting the performance of enzymatic hydrolysis can be classified into two categories, the enzyme-related and substrate-related factors [109]. As the enzyme-related factors have been intensively studied [107] and the cellulosic fiber is a high purity component, only the substrate-related factor of cotton fiber is discussed in this review, as our project mainly focuses on textile waste treatment. The following sections summarize the most dominating substrate-related factors affecting enzymatic hydrolysis of cotton fiber.

4.3.1 Cellulose Crystallinity

Cellulose crystallinity (measured and expressed as the crystallinity index, CrI) and degree of polymerization (DP) are two most significant parameters affecting the efficiency of enzymatic hydrolysis. It has long been recorded that the initial reaction rate of enzymatic hydrolysis can increase with decreasing CrI of the cellulose samples [110, 111]. Therefore, pretreatment is essential to enzymatic hydrolysis of cellulose fiber with high CrI. For example, CrI was reduced significantly during mechanic pretreatment, e.g., twin screw extrusion [112], effectively while simultaneously changing the substrate properties, such as decrease of particle size or increase of accessible surface area [113], which furthermore increased the rate of hydrolysis. Also, it has been observed in chemical pretreatment methods, such as alkaline pretreatment, could reduce the CrI of the substrate [114].

4.3.2 Degree of Polymerization

The number of AGUs or DP are indicators of the mean chain length of the cellulosic fibril [115]. In purified cotton linter, the average DP is between 1000 and 3000 [116]. DP is strongly related to the other properties of the substrate such as CrI. During enzymatic hydrolysis, EGs target on less organized internal cellulose chains, which has a main role in decreasing DP. Cellulose DP ascribes to the increased recalcitrance of the remaining crystalline cellulose in the hydrolysate [117].

4.3.3 Surface Area of Substrate/Feedstock Particle Size/Porosity

Surface area and particle size are essential factors that can influence the enzymatic hydrolysis process. Increasing surface area or reducing particle size to increase the accessibility of cellulose to enzyme is the main focus of all types of pretreatment [118]. The influence of surface area and particle size on enzymatic hydrolysis could be even more crucial than the CrI under certain conditions [119]. Furthermore, the pore size of the substrate, created after pretreatment, is also a factor in enzymatic hydrolysis [120]. In most cases, the internal area of lignocellulose substrate is much larger than the external area, which blocks the accessibility of enzyme in the pores [121]. Therefore, increasing the porosity has the ability to boost the hydrolysis to some extent.

4.4 Pretreatment

Pretreatment is a primary step in increasing the cellulose accessibility to cellulase [107, 113]. A significant number of studies have been carried out on the pretreatment of textile fiber for resource recovery, and the major scopes with research outcomes are summarized in Table 6. The basic pretreatment approaches can be classified into four categories, i.e., chemical (acid, alkali, and ionic liquid), biological, physical (milling and grinding), and physico-chemical processes. Different pretreatment processes may result in different types and levels of structural modification and improve enzymatic hydrolysis after different mechanisms [114], which will be summarized in the following sections.

4.4.1 Acid Pretreatment

Acid pretreatment is currently the most widely studied and applied approach for the pretreatment of cellulose fiber and other related feedstock. The key mechanisms of the acid pretreatment to the decomposition of the microstructure of cellulose fiber and its impacts on enzymatic hydrolysis are illustrated in Fig. 3b. During the acid pretreatment process, the amorphous region of cellulose can be hydrolyzed to short saccharide chains, cellobioses, and some glucose, while the crystalline regions with more reducing ends and non-reducing ends can be exposed to the enzymes, which facilitates the enzyme to perform the degradation process. Meanwhile, formic acid was found to be useful in breaking down the hydrogen bonds between the chains of the cellulose molecules, causing swelling of the fibers, and “crush” the crystalline lattice of the microfibrils [136]. The sugar yield of acid-induced hydrolysis of cellulose fiber increases with increased dosages of acid, higher cooking temperature, and longer retention time. Complete conversion of cellulose to sugar is possible based upon the severity of pretreatment.

Acid pretreatment was conducted under two concentration ranges based on the needs of applications and the treated feedstock. Concentrated acid pretreatment has been carried out by using 60–90% of acid and dilute acid processes usually involve the use of acid at 0.5–15% in the pretreatment liquid [137]. Sulfuric acid or phosphoric acid pretreatment have been applied to improve both direct hydrolysis and enzymatic hydrolysis [122, 124]. Chu et al. [122] showed that cotton cellulose (at 30–70 g/l concentration) can be completely dissolved in 55% sulfuric acid at 40 °C, resulting in reasonable sugar yield between 64.3 and 73.9%. Shen et al. [123] used 85% phosphoric acid to treat the cotton-based textile wastes and achieved a 79.2% sugar recovery at 50 °C after 7 h. On the other hand, dilute acid pretreatment has been commonly applied for treating cellulose and other biomass [138, 139]. The process has often been conducted at higher temperature than the concentrated acid processes at 95 °C [127], 121 °C, or even higher temperature [126]. The cooking time of the processes is usually less than 30 min, followed by enzymatic hydrolysis after pH neutralization. The optimal pH for the enzymatic hydrolysis processes is approximately 4.8–5.0.

Acid pretreatment provides a simple solution to direct hydrolysis of simple cellulose such as cotton and textile wastes, but some concerns have been raised due

Table 6 Published pretreatment methods on cotton/polyester separation and enzymatic hydrolysis

Substrate	Solid content	Chemical	Pretreatment conditions	Hydrolysis condition (if applied)	Results	Reference
Cotton cellulose	30–70 g/l	55% H ₂ SO ₄	40 °C		The reduced sugar yields from 64.3 to 73.9%	[122]
Cotton-based textile waste		85% H ₃ PO ₄	50 °C, 7 h		79.2% sugar recovery	[123]
100% cotton liner and polyester/cotton blended shirt (40/60%)	5.20%	85% H ₃ PO ₄	50 °C, 120 min	50 °C, 2.5% solids loading, pH 5.0, 10 FPU cellulase	4.6–7.7 mg/ml sugar yield, ethanol 0.4 g/g glucose	[124]
Cotton waste	2.50%	3% H ₂ SO ₄	121 °C, 30 min	50 °C, 5% solids loading, pH 5.0, 0.52 U/ml cellulase	400 mg/ml sugar yield and 8.9 g/l ethanol yield	[125]
Cotton waste	1.50%	1.1% H ₂ SO ₄	121 °C, 30 min	45 °C, 5% solids loading, pH 4.5, 0.52 U/ml cellulase	90 ml/l ethanol yield	[126]
Cotton cloth (mercerized cotton, Tencel, cupra, rayon, and polynosic)	0.20%	10 N H ₂ SO ₄	95 °C, 1 min follow 10 min stirring		Complete cotton and polyester separation	[127]
Cotton liner/jeans	1 g/20 ml	12% NaOH	0 °C, 180 min	50 °C, 3% solids loading, pH 5.0, 60 FPU cellulase	0.48 g ethanol/g textile	[128]
Orange 50/50 polyester/cotton & blue 40/60 polyester/viscose blend	5%	85% N-methylmorpholine-N-oxide	120 °C, 120 min	50 °C, 3% solids loading, pH 5.0, 20 FPU cellulase	48 (85%) and 50 (89%) g ethanol/g, respectively	[129]
Blended knitting yarn (50% cotton/50% polyester) waste	10%	20 g/l MgCl ₂ and 4 g/l Al ₂ (SO ₄) ₃	20 °C followed by 180 °C steaming		Highest degradation rate (95.47%) of cotton component	[130]
Greige cotton print cloth fabric	1% (3 g)	Cellulase EBT		1 g/l concentration, 108 FPU/ml, 50 °C, pH 4.8, 4 h with agitation	7% weight loss, reduce sugar 25.8 mg/g cotton	[131]
Denim 100% cotton fabric	3%	Genzyme SL		2% concentration, 55 °C, pH 5.5, 40 min	5% weight gaining due to more shrinkage in warp direction	[132]

Table 6 continued

Substrate	Solid content	Chemical	Pretreatment conditions	Hydrolysis condition (if applied)	Results	Reference
Mercerized taffeta (100% cotton)	1%	100 mg/g <i>Trichoderma reesei</i> , Cellusoft L (CMC activity 25.8 mg/ml)	50 °C, 120 min	0.1 M acetate buffer, pH 5.0, at 50 °C.	100% total weight loss under mechanical agitation	[133]
Mercerized taffeta (100% cotton)	4%	100 mg/g <i>Trichoderma reesei</i> , Cellusoft L (CMC activity 25.8 mg/ml)	50 °C, 360 min	0.1 M acetate buffer, pH 5.0, at 50 °C.	100% total weight loss under mechanical agitation	[133]
Taffeta mixture (66% cotton and 34% polyester)	4%	200 mg/g <i>Trichoderma reesei</i> , Cellusoft L (CMC activity 25.8 mg/ml)	50 °C, 540 min	0.1 M acetate buffer, pH 5.0, at 50 °C.	50 and 45% in total and insoluble weight loss	[133]
Undyed 100% cotton T-shirts	2%	Ionic liquid (IL) 1-allyl-3-methylimidazolium chloride ([AMIM][Cl])	110 °C, 90 min	50 °C, 5% solids loading, pH = 5.0, 3.3U/ml cellulase	Highest sugar yield 94%	[134]
50/50 polyester/cotton blend yarn	2%	AMIMCl	120 °C, 360 min		100% dissolution and cotton/polyester separation	[135]

to its more stringent requirements of reactors/container to prevent corrosion at elevated concentrations and low recyclability of acid reagents. Both of these factors can considerably increase the operation cost and environmental concern of the overall biorefinery process. Meanwhile, high severity acid pretreatment (i.e., high acid doses, high temperature, and extended reaction time) can often promote the conversion of carbohydrates to form into sugar dehydration by-products (i.e., furan-type inhibitors; 5-hydroxy methyl-furfural and 2-furfuralaldehyde), which are harmful to the downstream fermentation processes at high concentration [118, 140, 141].

4.4.2 Alkali Pretreatment

Alkali pretreatment process is another commonly applied process to decompose the structure of the cotton fiber. The key function of alkaline to cellulose, as illustrated in Fig. 3c, is the swelling effect, which breaks down the inter and intra chains of cellulose molecules, resulting in more amorphous regions for enzymatic hydrolysis [139]. Sodium hydroxide (NaOH) [128, 142], potassium hydroxide (KOH) [143], and calcium hydroxide [$\text{Ca}(\text{OH})_2$] [144, 145] are commonly used chemicals for alkaline pretreatment. Alkaline pretreatment is known for its saponification and salvation reaction to destroy the organized structure of the cellulose, which reduce the DP and CrI of the cellulose and create more porous space for enzymatic hydrolysis [118].

The sugar yields after sodium hydroxide at high temperature, i.e., 121 °C [142], room temperature, and freezing temperature [128], have been investigated in many previous works. The pretreatment condition of 121 °C and 15 psi is not widely promoted from an economic perspective of industry, even though it can largely improve the enzymatic hydrolysis [142]. Pretreatment under room temperature seems to be a more reasonable method for large-scale application.

Cellulose dissolution at low temperature by using NaOH seems to be an applicable approach to break the crystallinity region of cellulose to some extent. Many derivative and non-derivative cellulose dissolution solvents have been studied. Only non-derivative solvent like NaOH is proven to have the ability to regenerate dissolved cellulose for enzymatic hydrolysis [146]. NaOH/urea aqueous solution was found to directly dissolve cellulose at freezing temperature and to increase enzymatic hydrolysis efficiency based on the earliest proposed cellulose dissolution mechanism [147]. Sodium hydroxide hydrates could penetrate the amorphous region of cellulose and destroy the crystallized region; therefore this process increases the dissolution of cotton cellulose [148, 149]. The function of urea is to be a component of a system including NaOH hydrates–urea–free water–cellulose form a special solution. Soda in the solution serves as a cutting tool to destroy the inter- and intra- hydrogen bonds between cellulose molecules, and urea hydrates prevent the re-association of cellulose molecules by acting as a hydrogen bond donor and receptor in the solvent [150]. Although with many benefits for the alkali pretreatment, the long processing time, low solid-to-liquid ratios during pretreatment, and needs of neutralization of pretreated substrate, may somehow hinder the wide application of the process. These problems may be overcome by the high recyclability of the reagents in the spent liquor, which also needs to be tested in the near future.

4.4.3 Ionic Liquid

The pretreatment by using ionic liquid (ILs) has drawn a significant amount of attention recently. ILs are an organic salt that consists of organic cations and relatively smaller inorganic anions in a liquid phase at room temperature, and their melting point is below 100 °C [151]. There are mainly two factors that lead to the various properties of ILs: the cation structure (the symmetrical array, the influence of alkylphosphonate, and hydrophobic groups) and the anion delocalization degree [152]. Previous researchers also proved that the composition of lignocellulosic biomass changes scarcely while its structure alters significantly through ILs pretreatment [151]. Some ILs have shown outstanding characteristics for industrial application, i.e., high chemical and thermal stabilities, liquid form in wide range of temperature, low vapor pressure, and low viscosity operation, which reduces the cost of mixing [153].

Among all the investigated ILs, some non-derivative hydrophilic ionic liquid, for instance, 1-butyl-3-methylimidazolium chloride (BMIMCl) and 1-ethyl-3-methylimidazolium diethyl phosphate (EMIMDEP) have shown the capability of dissolving cellulose [154]. Because the hydrogen bond in ILs arranged between non-hydrated chloride ions and sugar hydroxyl proton in a 1:1 ratio, which disrupts the non-covalent bonding of cellulose and other components [155]. After the ILs pretreatment process, the dissolved cellulose can be regenerated by adding anti-solvents such as water, ethanol, or acetone [154]. The regenerated cellulose through ILs pretreatment has more homogeneous microfibrils than original cellulose, while the DP and polydispersity remains with no significant changes [156].

ILs has been tested in the pretreatment of certain cotton or textile wastes, although its feasibility in large-scale application is still unclear and needs further investigation. Hong et al. [134] used a 1-allyl-3-methylimidazolium chloride ([AMIM]Cl) IL to treat undyed 100% cotton T-shirts. After 90 min of pretreatment at 110 °C, a high sugar yield (94%) was achieved by using a reasonable amount of cellulase. De Silva et al. [135] further used the same IL to treat a 50:50 blend PET/cotton yard at a longer cooking period (6 h) and higher temperature (120 °C). The cotton was effectively dissolved and regenerated in the anti-solvent and formed into fiber films after regeneration. The PET was completely recovered after the process.

The key limiting factors hindering the applicability of ILs are high production cost and environmental toxicity [157]. The current price for ([AMIM]Cl) IL is approximately \$22–26 USD per gram (chemical grade, Sigma-Aldrich). Furthermore, complete removal of ILs should be conducted after the pretreatment process, as its residue has shown a substantial negative influence on enzyme hydrolysis [158]. Finally, in terms of operation and processing, the IL/cellulose mixture is difficult to handle in the existing reactor systems due to its increasing viscosity, which will significantly increase the operation cost of the overall processes and need to be overcome in further investigations [158].

4.4.4 Supercritical Fluid

Supercritical fluid is a phase of reagents of which both gas and liquid phases coexist under a specific pressure and temperature [159]. It shows liquid-like density and gas-like diffusing/penetrating ability to solid materials. Among all the supercritical fluids, supercritical carbon dioxide, which has a critical temperature at 31 °C, has shown to be suitable for pretreatment of cellulosic feedstock [159]. Supercritical carbon dioxide (SC-CO₂) has been widely used as an extraction solvent [160]. In aqueous solution, CO₂ forms carbonic acid and can improve the hydrolysis of polymers. CO₂ molecule is similar in size to the molecules of water or ammonia, and therefore they can penetrate through the same pathway to the small pores of the cellulose.

CO₂ has even been used to modify steric structures of some cellulases to improve their stability, solvent tolerance, and reactivity [161]. Saka and Ueno [162] investigated the direct conversion of various types of celluloses (including cotton linter) in supercritical water (500 °C, 35 MPa) into glucose and found that cellulose can be hydrolyzed to a similar level as acid or enzymatic hydrolysis, without the difficulties occurred by using those hydrolyzing techniques. Muratov and Kim [163] studied the performance of enzymatic hydrolysis of cotton fibers in supercritical CO₂ (120 atm, 50 °C, 48 h) and found that the productivity of the glucose increased by 20%, as in atmosphere. As commercial-scale supercritical CO₂ treatment has been seen in textile industries (such as for dyeing), similar technology and equipment could be worthwhile to be explored further for the treatment of textile wastes in the future.

5 Valorization of Textile Waste

In the 1990s, the waste valorization concept attracted attention worldwide since waste disposal is becoming a serious issue. Nowadays, waste valorization is not only concerned with efficacy of waste handling but also with the management of recycling programs. Valorization of waste is defined as a process activity that is aimed at reusing, recycling, or composting wastes to produce value-added products or sources of energy [164]. It is considered as a business opportunity as well as a sustainable way for chemical production. Textile recycling has the potential to make a huge environmental and economic impact. Valorization of textile waste is divided into two main types: valorization of wastewater and valorization of solid waste from textile industry.

5.1 Valorization of Wastewater from the Textile Industry

Textile wastewater is comprised of toxic pollutants such as dyes, heavy metals, and surfactants. Furthermore, wastewater composition changes according to the processing step. These toxic chemicals in textile wastewater are harmful to ecosystems, so most of the studies were focused on wastewater treatment rather than valorization of textile wastewater. Even though wastewater contains hazardous

chemical compounds, it also contains organic components, which can be converted into value-added compounds via bioconversion processes.

5.1.1 Bioconversion of Wastewater to Value-Added Products

Due to the inhibitory effect of toxic chemicals in textile wastewater, there have been very few studies conducted on valorization of textile wastewater via bioprocesses (Table 7).

Opwisa and Gutman [170] have demonstrated a biological conversion of sugar in textile wastewater into biogas without any wastewater treatment. Results showed that biogas, which contains 60% of methane, was generated and COD in wastewater decreased around 85%. There is no evidence for microbial growth suppression by trace elements presented in wastewater. However, applying advanced oxidation processes as a wastewater treatment on biogas production has improved biogas productivity. Apollo et al. [171] investigated the effect of UV treatment of textile wastewater on biogas production via an anaerobic digestion system. Results showed that the treated wastewater has improved methane content in biogas of around 25–50%.

There are a few studies on using textile wastewater for biohydrogen production. Li et al. [169] investigated the feasibility of using textile wastewater as a raw material to produce biohydrogen. Result showed that just only 0.04 to 1.04 mol H₂/mol hexose was obtained from non-treated textile wastewater. Then wastewater activated carbon was applied in order to remove toxic chemicals. Result found that 1.37 mol H₂/mol hexose was obtained from treated textile wastewater.

On the other hand, Lay et al. [168] studied the bioconversion of textile wastewater without any pretreatment to remove toxic chemicals. They reported that 66 ml of bio-hydrogen was produced from textile wastewater surplus with starch via anaerobic fermentation. The biohydrogen contained 32.2% of H₂, corresponding to a hydrogen yield of 1.56 mol H₂/mol hexose with hydrogen production rate of 1.14 l/l/day. Moreover, ethanol, butanol, and acetic acid were generated as by-products at the same condition. This study found that the optimal textile waste concentration for producing bio-hydrogen was around 8–17 g COD/l. This indicated that pretreatment is required in order to reduce COD level and to remove toxic chemicals, which may have a negative affect on microbial cells. Consequently, it can improve productivity of the bioconversion process.

Unlike the bioconversion process, hazardous compounds have less concerned in thermal process. Therefore, Kipçak and Akgün [172] proposed an alternative method to generate energy via gasification of textile wastewater. The experiment was performed at high temperature (450–600 °C) under a constant pressure (25 MPa) for 150 s. Results showed that 1 ml of textile wastewater can generate 1.23 ml of syngas, which comprises 3.02% hydrogen, 38.93% methane, 4.33% ethane, 0.10% propane, 0.01% propylene, 7.97% carbon monoxide, 27.22% carbon dioxide, and 8.00% nitrogen.

Table 7 Overview of bioconversion of textile wastewater to value-added products via bioprocesses

Valorized product	Productivity (production rate)	Fermentation mixture	Microorganism	Fermentation type	Remark	Reference
Biogas	55.7 l/g COD (312 L/day)	Sago: textile dyeing wastewater at ratio of 70:30	Unknown microorganisms from the anaerobic digester treating sago effluent	Anaerobic digestion	88.5% COD removal	[165]
	90.8 l/g COD (1.65 L/L d)	Textile wastewater	Granular sludge	Anaerobic digestion	85% COD removal 20-l reactor	[166]
	3.3 l/g COD (7.2 l/day)	30% of synthetic dye and 70% of synthetic starch wastewater mixing	Mixed consortium from the anaerobic digester treating tapioca starch effluent	Anaerobic digestion	81 % COD removal	[167]
Biohydrogen	1.56 mol H ₂ /mol hexose	Textile wastewater supplemented with starch and inorganic nutrients	Cow dung	Anaerobic fermentation	32.2% H ₂	[168]
	1.37 mol H ₂ /mol hexose	Treated textile wastewater	Wastewater treatment sludge (<i>Clostridium butyricum</i> and <i>Klebsiella oxytoca</i>)	Dark fermentation	The wastewater was hydrolyzed by β -amylase. Inhibitors were removed by activated carbon and cation exchange resin. Ethanol and acetic acid were obtained in liquid phase	[169]

5.2 Valorization of Solid Waste from the Textile Industry

The solid waste from the textile industry may consist of a single type of fiber or multiple types of fiber depending on the processing step and end product. The waste that contains a single type of fiber is preferred, as their recycling process is simpler. Organic compounds in solid waste can be used as a raw material to produce desired products via bioconversion processes. On the contrary, thermal and chemical processes can convert both organic and inorganic compounds to value-added products.

5.2.1 Thermal and Thermochemical Conversion Processes

Conventional thermal processing refers to the combustion of solid waste and its conversion into energy. Since solid waste from the textile industry contains a high energy content, it can be used as a raw material to generate heat energy. Ryu et al. [78] reported that a mixture of cotton and polyester contained energy content of 16 MJ/kg. Combustion of the blend fabric at 700 °C for a few minutes could generate a high heat energy content gas stream at 1100 °C as the air flow rate of 819 kg/m²/h (0.186 m/s).

Briquette is another product created from the conventional thermal process. Briquette is a solid fuel that is normally made from woody material. Solid waste from the textile industry can also be used as a raw material to produce briquette. Drying and densification processes are required because solid textile waste is bulky and contains high moisture. Once the textile waste is compacted, it can be used for co-combustion with solid fuel, since it contains a similar compound compared to the briquette that is obtained from coal [173] (Table 8).

The thermal processes that is performed at high temperature with inadequate oxygen could generate carbon monoxide, which is a greenhouse gas. Therefore, a thermochemical conversion process, such as pyrolysis, was applied. Pyrolysis is referred to the decompositional process with high temperature in absence oxygen condition. The absence of oxygen was controlled by nitrogen, which was used as the carrier gas to provide an inert atmosphere. Products from pyrolysis are various, such as activated carbon fiber, char, bio-oil, and syngas (as shown in Table 9). The variation of product is related to pyrolysis condition. William and Reed [174] investigated the effect of pyrolysis condition on the production yield (activated carbon from natural fiber textile waste). The results indicated that the pyrolyzed product at high temperature has improved surface area of activated carbon [174]. Nahil and William [175] investigated activated carbon production from acrylic compound in textile waste via pyrolysis. They reported that the retention time of pyrolysis also affects surface area generation. Results found that pyrolyzed product at 700 °C and steaming at 900 °C for 1 h had a surface area of around 500 m²/g activated carbon, while pyrolysis at 700 °C and steam at 900 °C for 2 h can increase the surface area up to 752 m²/g activated carbon.

Many textile-recycling studies have applied chemical substances in the process in order to improve properties of product. For instance, applying sulfonation technique on cotton lint can create absorbent material that can remove lead ions [179]. Cotton

Table 8 Composition of briquettes derived from textile waste and coal [173]

Feedstock	Textile waste	Coal
Ultimate analysis (%w/w daf)		
Hydrogen	6.52	5.7
Carbon	65.07	84.0
Sulphur	0.23	2.6
Nitrogen	16.14	1.5
Oxygen	12.04	6.06
Chlorine	–	0.14
Proximate analysis (%w/w)		
Ash (db)	1.98	6.6
Moisture (ar)	2.41	6.3
Heating values (MJ/kg)		
Lower heating value (ar)	26.37	29.97
Higher heating value (ar)	27.79	31.18

daf dry ash free basis**Table 9** Effect of pyrolysis condition of production yield

Substrate	Pyrolysis condition	Product	Reference
Cotton fibers	700 °C and nitrogen flow of 60 ml/min	72 wt% of oil, 13.5 wt% of gas, and 12.5 wt% of char	[176]
Natural fiber			[177]
Hemp	450 °C and steam activated at 800 °C	44.6 wt% of oil, 28.7 wt% of gas, and 28.5 wt% of char	
Flax		52.2 wt% of oil, 22.8 wt% of gas, and 25.1 wt% of char	
Jute		59.6 wt% of oil, 15.9 wt% of gas, and 24.6 wt% of char	
Coir		47.4 wt% of oil, 18.2 wt% of gas, and 34.4 wt% of char	
Abaca		48.1 wt% of oil, 23.6 wt% of gas, and 28.6 wt% of char	
Acrylic textile	800 °C and steam activated at 900 °C	Activated carbon	[178]
Acrylic textile	700 °C and steam activated for 2 h	Activated carbon	[175]

lint pyrolyzed at 550 °C surplus with sodium hydroxide generated a high surface area of activated carbon compared to an ordinary pyrolysis at the same temperature [180]. Jieying et al. [181] also supported that chemical $(\text{NH}_4)_2\text{HPO}_4$ added during pyrolysis affected the surface area of activated carbon. Table 10 shows the various physicochemical processes used for valorization of solid waste from textile industry. Several studies were carried out in which the textile waste was mixed with other solid waste for upgrading the physical properties of the derived products [182–186]. These modified materials are often used as construction materials (e.g., concrete, gypsum,

Table 10 Valorization of solid waste from textile industry via physicochemical process

Raw material	Process	Product	Reference
Textile waste, sunflower stalk, stubble fibers	Mix and high pressure	Thermal insulation material	[182]
Textile production wastes	Hot molding	Heat-insulating tiles	[184]
Textile waste, glass fiber	N/A	Lightweight concrete	[186]
Recycled textile fibers	Hot molding	Gypsum and cork	[183]
Waste cotton linter	Reactive liquid Si infiltration	Porous SiC ceramics	[187]
Short-fiber textile waste	Mix with wood fiber, organic synthesis	Fiber plates	[185]
Non-woven waste	As reinforcement to mix with raw material	Polypropylene, low-density polyethylene	[188]
Cotton waste garments	Dissolve and spun	Regenerated cellulose fibers	[189]
Textile loom waste	Graft co-polymerization	Highly absorbent polymer	[190]
Waste textiles	Co-combustion with coal	As energy supply	[173]
Textile sludge and waste glass	Hot molding	Bricks	[191]
Cotton woven waste	Carbonization and activation temperature are 700 and 800 °C	Activated carbon fibers	[181]
Cotton linters	NaOH at 350 °C (weight ratio of 1:3 for CLs/NaOH), the sample continued to be heated at 550 °C and maintained at this temperature for 1 h	Activated carbon	[180]
Native cellulose cotton fibers	Graft copolymerization of polyacrylonitrile (PAN) and then by insertion of phenyl thiosemicarbazide moieties	Chelating fibers	[192]
Cotton linter	Sulfonation	Adsorbent for high-efficiency removal of lead(II)	[179]

tiles, bricks), porous materials like activated carbon or ceramics [174, 175, 187], and absorbent materials [80, 188–190].

5.2.2 Bioconversion Process

Biochemical transformation via fermentation is a very attractive route for utilizing textile waste. Textile waste, especially cotton, is typically composed of 88–96% cellulose, with the remaining portions consisting of proteins, pectin, and wax [128, 193]. Therefore, it is possible to hydrolyze the cotton by enzymatic or chemical methods to obtain glucose, and then ferment it into value-added products (Table 11).

Table 11 Overview of valorization of textile waste via bioconversion processes

Substrate	Valorized product	Productivity	Pretreatment	Sacharification	Fermentation type	Microorganism	Reference
100% cotton red T-shirt and black T-shirt blend shirt	Bacterial cellulose	1.88 g/l	Acid	Enz	SmF	<i>Gluconacetobacter xylinus</i>	[195]
100% cotton T-shirt	Bacterial cellulose	10.8 g/l	Ionic liquid	Enz	SmF	<i>Gluconacetobacter xylinus</i>	[134]
Purple and rose-red and green bed sheet	Bacterial cellulose	14.2 g/l	Ionic liquid	Enz	SmF	<i>Gluconacetobacter xylinus</i>	[197]
Purple and rose-red and green bed sheet	Cellulase	5.3 U/ml cellulase	Ionic liquid	Enz	SmF	<i>Gluconacetobacter xylinus</i>	[197]
A cotton–polyester waste textile	EtOH	70% yield	Alkaline solvent	Enz	SSF	<i>Saccharomyces cerevisiae</i>	[194]
Cotton-based materials	EtOH	83% of the theoretical yield (0.42 g/g)	Acid	Enz	SSF	<i>Saccharomyces cerevisiae</i> CCUG 53310	[128]
Blue jeans	EtOH	86% of theoretical yield (0.44 g/g)	Acid	Enz	SSF	<i>Saccharomyces cerevisiae</i> CCUG 53310	[128]
Cotton-based materials	Glucose	Glucose yield of 85%	Alkali	Enz	N/A	N/A	[128]
Orange 50/50 polyester/cotton blend size: $3 \times 3 \text{ cm}^2$	Biogas	Methane yield of 62.1%	Ionic liquid	Enz	AnD	Thermophilic bacteria from municipal solid waste digester	[129]
Orange 50/50 polyester/cotton blend size: $3 \times 3 \text{ cm}^2$	EtOH	Ethanol yield 94.4%	Ionic liquid	Enz	SSF	<i>Saccharomyces cerevisiae</i> CCUG 53310	[129]
Blue 40/60 polyester/viscose blend size: $3 \times 3 \text{ cm}^2$	Biogas	Methane yield of 56.8%	Ionic liquid	Enz	AnD	Thermophilic bacteria from municipal solid waste digester	[129]

Table 11 continued

Substrate	Valorized product	Productivity	Pretreatment	Saccharification	Fermentation type	Microorganism	Reference
Cotton waste	Biogas	Methane yield of 77.8%	N/A	N/A	AnD	Microbial in animal dung	[24]
Blue 40/60 polyester/viscose blend size: $3 \times 3 \text{ cm}^2$	EtOH	Ethanol yield of 88.8%	Ionic liquid	Enz	SSF	<i>Saccharomyces cerevisiae</i> CCUG 53310	[129]
Wool textile residues	Biogas	0.43 N m ³ /kg	Thermal	Enz	AnD	Bacteria from biogas plant	[200]

EtOH ethanol, *AnD* anaerobic digestion, *SmF* submerge fermentation, *SSF* simultaneous saccharification and fermentation, *Enz* enzymatic hydrolysis

Many studies have demonstrated that textile wastes can be converted into ethanol [128, 129, 194]. However, since the yield in the enzymatic hydrolysis of untreated waste was low, it is necessary to develop a suitable pretreatment process for the textile waste. Jeihanipour et al. [129] reported that textile waste pretreated by ionic liquid can achieve high ethanol yield (>70%).

Kuo et al. [195] proposed a process for the bacterial cellulose production via combination of enzymatic saccharification and *Gluconacetobacter xylinus* fermentation. After 7 days of static cultivation, 1.8 g/l bacterial cellulose pellicle was obtained. Hong et al. [134] used 1-allyl-3-methylimidazolium ([AMIM]Cl) to enhance the pretreatment process and obtained 10.8 g/l bacterial cellulose by using *Gluconacetobacter xylinus*. Furthermore, Adnan et al. [196] and Guo et al. [197] also investigated the possibility of producing both bacterial cellulose and cellulase from waste fiber sludge and waste textile, respectively. In addition, *Gluconacetobacter xylinus* was used for bacterial cellulose, and *Trichoderma reesei* was used for cellulase production.

Biogas production from textile waste via anaerobic digestion is an alternative route to utilize solid waste from textile industry. This process has less requirement on toxic compound removal, therefore the textile waste can be used directly in an anaerobic digestion process. Nevertheless, the pretreatment is needed in order to obtain high methane concentration. Rajendran and Balasubramanian [198] reported that ionic liquid-treated jeans can generate 600 ml of methane/day, while untreated jeans generated only 200 ml of methane/day. It was also found that a basic dye (Rhodamine-B) can be removed during anaerobic digestion [199].

Sections 5.2.1 and 5.2.2 demonstrate that the valorization of solid waste from textile industry via thermal process, physicochemical process, and bioconversion process can improve energy security and decrease pollution.

6 Challenges of textile waste valorization

As illustrated in Sect. 5.2.1, three main methods have been used for valorization of textile waste: (1) mechanical processing of textile waste for reuse in different applications; (2) decomposition via pyrolysis and/or hydrolysis to convert textile waste into basic chemicals, monomers and/or fuels; and (3) incineration to generate heat and power [201, 202].

The collection and separation of various kinds of textile wastes is one of the key challenges [203]. In the USA, the Trans-America Trading Company, with a capacity over 12 million pounds of textile waste per annum, has to spend enormous time and human power to separate more than 300 categories of textile waste by different size, composition, and fiber types [18]. An efficient textile waste collection system and a mechanical screening network are essential preconditions for large-scale textile valorization.

Based on current techniques discussed in this review, not all types of textiles are suitable for valorization. For cellulose fibers like fiber made from cotton, recycling by valorization could contribute to water conservation and waste water reduction, as cotton is one of the most water- and pesticide-dependent crops [18]. In contrast, for

many polymers, especially for blending polymers, the energy required for fiber manufacturing from raw material is usually relatively lower than that to be used in recycling them from textile waste [204]. The synthetic polymers with similar melting points are difficult to be separated for respinning [201]. Also, the valorization process involves both the consumption of a certain amount of chemicals and the generation of pollutions (e.g., waste water). Therefore, the environmental benefit of textile waste valorization is still arguable [203]. The textile wastes with complex contents are difficult to be recycled in valorization. For example, carpet is a recalcitrant material and it is filled with thermoset materials (e.g., styrene-butadiene latex rubber), therefore, it could not be reshaped or remelted [203]. The recycled materials from carpet usually lack suitable applications, hence most of them are discarded in landfills [202, 203]. Further investigations into more efficient and cleaner techniques are necessary.

Another challenge in textile waste valorization is the revenue obtained from the valorization process. With the technology development, the cost of raw materials and the prices of textile goods are both declining, which certainly will impair the attraction of investment on waste valorization [16, 18].

Overall, valorization of textile waste is promising but it has to face certain challenges. As a resolution, environmental accounting tools, such as life cycle assessment, should be applied to evaluate the environmental and economic benefits in waste valorization. In this way, the environmental impact and relative benefit in a cradle-to-grave process of textile products could be estimated with systematic data [203]. Moreover, favorable policies and the increasing consumers' appreciation of industry's effort on waste reduction should be the top priority on the agenda, with full support by the local government and policy-makers.

Acknowledgements The authors acknowledge the Hong Kong Research Institute of Textiles and Apparel (HKRITA), the Innovation and Technology Funding (ITP/109/15TP) from the Innovation and Technology Commission in Hong Kong. We are also grateful for the industrial partners and industrial sponsors, which include H&M Conscious Foundation, H&M Hennes & Mauritz (Far East) Ltd. for providing textile waste and industrial sponsorships. A special thanks is dedicated to Novozymes for their in-kind donation of enzymes.

References

1. Shishoo R (2012) Introduction: trends in the global textile industry. In: Shishoo R (ed) The global textile and clothing industry. Woodhead Publishing, Sawston, pp 1–7
2. Shui S, Plastina A (2011) A summary of the world apparel fiber consumption survey 2005–2008. Food and Agriculture Organization of the United Nation (FAO) and International Cotton Advisory Committee (ICAC), Washington, pp 1–11
3. Bartl A (2011) Textile Waste. In: Vallero DA (ed) Waste. Academic Press, Boston, pp 167–179. doi:10.1016/B978-0-12-381475-3.10012-9
4. Statista (2016) Worldwide production volume of chemical and fibers from 1975 to 2014 The statistics portal. <http://www.statista.com/statistics/263154/worldwide-production-volume-of-textile-fibers-since-1975/>. Accessed 25 May 2016
5. Tot BV (2004) Textile & apparel industry report. Available via FPT Securities. [http://fpts.com.vn/FileStore2/File/2014/07/01/Textile%20and%20Apparel%20Industry%20Report%20\(latest\).pdf](http://fpts.com.vn/FileStore2/File/2014/07/01/Textile%20and%20Apparel%20Industry%20Report%20(latest).pdf). Accessed 29 July 2016

6. Lenzing (2016) The global fibre market. <http://www.lenzing.com/en/fibers/the-global-fiber-market.html>. Accessed 29 July 2016
7. Vaidya AK (2006) Globalization: encyclopedia of trade, labor, and politics, vol 1. ABC-CLIO, Santa Barbara, pp 413–432
8. UN_Comtrade (2012) Apparel and Textiles: Trade Statistics. Michigan State University. <http://globaleedge.msu.edu/industries/apparel-and-textiles/tradestats>. Accessed 27 May 2016
9. Huang N (2012) China—the king of textile industry. Businessvibes. <https://www.businessvibes.com/blog/china-king-textile-industry>. Accessed 31 Oct 2012
10. Sharma M, Dhiman R (2016) Determinants affecting Indian textile exports: a review. *Biz Bytes J Manag Technol* 6:193–199
11. Forsythe SM, Thomas JB (1989) Natural, synthetic, and blended fiber contents: an investigation of consumer preferences and perceptions. *Cloth Text Res J* 7(3):60–64
12. Shui S, Plastina A (2013) World apparel fibre consumption survey. Food and Agriculture Organization of the United Nations (FAO) and International Cotton Advisory Committee (ICAC). ICAC, Washington, pp 1–27
13. Nordås HK (2004) The global textile and clothing industry post the agreement on textiles and clothing. *World Trade Organization* 7 (1,000)
14. Textile_Exchange (2012) FastFacts: textile and product waste. <http://textileexchange.org/>. <http://www.purewaste.org/media/pdf/textile-product-waste-fast-facts.pdf>. Accessed 1 Aug 2016
15. Association SMaRT (2011) Textile recycling checklist for communities [Online]. Secondary Materials and Recycled Textiles Association. http://www.smartasn.org/government/smart_checklist_rev08-03-11.pdf. Accessed 1 Aug 2016
16. Gracey F, Moon D (2012) Valuing our clothes: The evidence base. <http://www.wrap.org.uk/sustainable-textiles/valuing-our-clothes%20>. Accessed 8 Sept 2016
17. Department EP (2015) Monitoring of solid waste in Hong Kong (waste statistics for 2014). Environmental Protection Department. <https://www.wastereduction.gov.hk/sites/default/files/msw2014.pdf>. Accessed 29 July 2016
18. Luz C (2007) Waste couture: environmental impact of the clothing industry. *Environ Health Perspect* 115(9):A448
19. Ghaly A, Ananthashankar R, Alhattab M, Ramakrishnan V (2014) Production, characterization and treatment of textile effluents: a critical review. *J Chem Eng Process Tech* 5:1–18
20. Alay E, Duran K, Korlu A (2016) A sample work on green manufacturing in textile industry. *Sustain Chem Pharm* 3:39–46. doi:10.1016/j.scp.2016.03.001
21. Statista (2016) Cotton Production worldwide by country. The statistics Portal. <http://www.statista.com/statistics/263055/cotton-production-worldwide-by-top-countries/>. Accessed 9 July 2016
22. Gordon S, Yi Hsieh (2006) Cotton: Science and technology. Woodhead Publishing, Sawston, pp 576–586
23. Lee GF, Jones-Lee A (1993) Environmental impacts of alternative approaches for municipal solid waste management: an overview. Report by G Fred Lee & Associates, El Macero
24. Raj C, Arul S, Sendilvelan S, Saravanan C (2009) Bio gas from textile cotton waste- an alternate fuel for diesel engines. *Open Waste Manage J* 2:1–5
25. Exchange O (2010) Organic Cotton Market Report 2009. Organic Exchange, O'Donnell, Texas, pp 1–6
26. Hamner B (2006) Effects of green purchasing strategies on supplier behaviour. In: Sarkis J (ed) *Greening the supply chain*. Springer, Sawston, pp 25–37
27. Meyer A (2001) What's in it for the customers? Successfully marketing green clothes. *Bus Str Environ* 10(5):317–330
28. Bansal P, Hunter T (2003) Strategic explanations for the early adoption of ISO 14001. *J Bus Ethics* 46(3):289–299
29. Lo CK, Yeung AC, Cheng T (2012) The impact of environmental management systems on financial performance in fashion and textiles industries. *Int J Prod Econ* 135(2):561–567
30. Standardization IOF (2015) The ISO survey of management system standard certifications-2014. http://www.iso.org/iso/iso_survey_executive-summary.pdf?v2014. Accessed 29 July 2016
31. Hwang L (2008) Water management in China's apparel and textile factories. Business for social responsibility. https://www.bsr.org/reports/ChinaWater_IssueBrief_042908.pdf. Accessed 29 July 2016
32. Kant R (2012) Textile dyeing industry an environmental hazard. *Nat Sci* 4(1):22

33. Zeronian SH, Inglesby MK (1995) Bleaching of cellulose by hydrogen peroxide. *Cellulose* 2(4):265–272. doi:[10.1007/bf00811817](https://doi.org/10.1007/bf00811817)
34. Aly AS, Moustafa AB, Hebeish A (2004) Bio-technological treatment of cellulosic textiles. *J Clean Prod* 12(7):697–705. doi:[10.1016/S0959-6526\(03\)00074-X](https://doi.org/10.1016/S0959-6526(03)00074-X)
35. Babu B, Parande A, Raghu S, Kumar T (2007) Cotton textile processing: waste generation and effluent treatment. *J Cotton Sci* 11:141–153
36. Jegatheesan V, Pramanik BK, Chen J, Navaratna D, Chang C-Y, Shu L (2016) Treatment of textile wastewater with membrane bioreactor: a critical review. *Bioresour Technol* 204:202–212. doi:[10.1016/j.biortech.2016.01.006](https://doi.org/10.1016/j.biortech.2016.01.006)
37. Hasanbeigi A (2014) Alternative and emerging technologies for an energy-efficient, water-efficient, and low-pollution textile industry. Lawrence Berkeley National Laboratory, Berkeley
38. ChemSec's (2016) The textile process. textile guide. <http://textileguide.chemsec.org/find/get-familiar-with-your-textile-production-processes/>. Accessed 29 May 2016
39. Wang Z, Huang K, Xue M, Liu Z (2011) Textile dyeing wastewater treatment. INTECH Open Access Publisher, Rijeka, pp 91–116
40. Dey S, Islam A (2015) A review on textile wastewater characterization in Bangladesh. *Resour Environ* 5(1):15–44
41. Roy R, Fakhruddin A, Khatun R, Islam M (2010) Reduction of COD and pH of textile industrial effluents by aquatic macrophytes and algae. *J Bangladesh Acad Sci* 34(1):9–14
42. Muhammad A, Shafeeq A, Butt M, Rizvi Z, Chughtai M, Rehman S (2008) Decolorization and removal of cod and bod from raw and biotreated textile dye bath effluent through advanced oxidation processes (AOPS). *Braz J Chem Eng* 25(3):453–459
43. Babu BR, Parande A, Raghu S (2007) Textile technology: an overview of wastes produced during cotton textile processing and effluent treatment methods. *J Cotton Sci* 11(1):12
44. Sun W, Chen J, Chen L, Wang J, Zhang Y (2016) Coupled electron beam radiation and MBR treatment of textile wastewater containing polyvinyl alcohol. *Chemosphere* 155:57–61. doi:[10.1016/j.chemosphere.2016.04.030](https://doi.org/10.1016/j.chemosphere.2016.04.030)
45. Ebeling JM, Sibrell PL, Ogden SR, Summerfelt ST (2003) Evaluation of chemical coagulation–floculation aids for the removal of suspended solids and phosphorus from intensive recirculating aquaculture effluent discharge. *Aquacult Eng* 29(1–2):23–42. doi:[10.1016/S0144-8609\(03\)00029-3](https://doi.org/10.1016/S0144-8609(03)00029-3)
46. Verma AK, Dash RR, Bhunia P (2012) A review on chemical coagulation/floculation technologies for removal of colour from textile wastewaters. *J Environ Manage* 93(1):154–168. doi:[10.1016/j.jenvman.2011.09.012](https://doi.org/10.1016/j.jenvman.2011.09.012)
47. Ciardelli G, Capannelli G, Bottino A (2000) Ozone treatment of textile wastewaters for reuse. *Water Sci Technol* 44(5):61–67
48. Lin S, Peng C (1995) Treatment of textile wastewater by Fenton's reagent. *J Environ Sci Health Part A Environ Sci En* 30(1):89–98
49. Aravind P, Subramanyan V, Ferro S, Gopalakrishnan R (2016) Eco-friendly and facile integrated biological-cum-photo assisted electrooxidation process for degradation of textile wastewater. *Water Res* 93:230–241. doi:[10.1016/j.watres.2016.02.041](https://doi.org/10.1016/j.watres.2016.02.041)
50. Banat IM, Nigam P, Singh D, Marchant R (1996) Microbial decolorization of textile-dye-containing effluents: a review. *Bioresour Technol* 58(3):217–227. doi:[10.1016/S0960-8524\(96\)00113-7](https://doi.org/10.1016/S0960-8524(96)00113-7)
51. Govindwar SP, Kurade MB, Tamboli DP, Kabra AN, Kim PJ, Waghmode TR (2014) Decolorization and degradation of xenobiotic azo dye Reactive Yellow-84A and textile effluent by *Galactomyces geotrichum*. *Chemosphere* 109:234–238. doi:[10.1016/j.chemosphere.2014.02.009](https://doi.org/10.1016/j.chemosphere.2014.02.009)
52. Jadhav J, Govindwar S (2006) Biotransformation of malachite green by *Saccharomyces cerevisiae* MTCC 463. *Yeast* 23(4):315–323
53. Saratale RG, Saratale GD, Chang JS, Govindwar SP (2009) Decolorization and biodegradation of textile dye Navy blue HER by *Trichosporon beigeli* NCIM-3326. *J Hazard Mater* 166(2–3):1421–1428. doi:[10.1016/j.jhazmat.2008.12.068](https://doi.org/10.1016/j.jhazmat.2008.12.068)
54. Fu Y, Viraraghavan T (2001) Fungal decolorization of dye wastewaters: a review. *Bioresour Technol* 79(3):251–262. doi:[10.1016/S0960-8524\(01\)00028-1](https://doi.org/10.1016/S0960-8524(01)00028-1)
55. Deng D, Guo J, Zeng G, Sun G (2008) Decolorization of anthraquinone, triphenylmethane and azo dyes by a new isolated *Bacillus cereus* strain DC11. *Int Biodeterior Biodegrad* 62(3):263–269. doi:[10.1016/j.ibiod.2008.01.017](https://doi.org/10.1016/j.ibiod.2008.01.017)
56. Przysaś W, Zabłocka-Godlewska E, Grabińska-Sota E (2009) Screening of dyes decolorizing microorganisms strains. *Pol J Environ Stud* 18(2B):69–73

57. Ali N, Hameed A, Ahmed S (2010) Role of brown-rot fungi in the bioremoval of azo dyes under different conditions. *Braz J Microbiol* 41:907–915
58. Rani B, Kumar V, Singh J, Bisht S, Teotia P, Sharma S, Kela R (2014) Bioremediation of dyes by fungi isolated from contaminated dye effluent sites for bio-usability. *Braz J Microbiol* 45(3):1055–1063
59. Przysaś W, Zabłocka-Godlewska E, Grabińska-Sota E (2013) Effectiveness of dyes removal by mixed fungal cultures and toxicity of their metabolites. *Water Air Soil Pollut* 224(5):1534. doi:10.1007/s11270-013-1534-0
60. Abadulla E, Tzanov T, Costa S, Robra K-H, Cavaco-Paulo A, Gübitz GM (2000) Decolorization and detoxification of textile dyes with a laccase from *Trametes hirsuta*. *Appl Environ Microbiol* 66(8):3357–3362
61. Tauber MM, Guebitz GM, Rehorek A (2005) Degradation of azo dyes by laccase and ultrasound treatment. *Appl Environ Microbiol* 71(5):2600–2607
62. Cardoso JC, Bessegato GG, Boldrin Zanoni MV (2016) Efficiency comparison of ozonation, photolysis, photocatalysis and photoelectrocatalysis methods in real textile wastewater decolorization. *Water Res* 98:39–46. doi:10.1016/j.watres.2016.04.004
63. Vigneswaran C, Ananthasubramanian M, Kandhavadi P (2014) Bioprocessing of organic cotton textiles. In: *Bioprocessing of textiles*. Woodhead Publishing India, Sawston, p 319–397. doi: <http://dx.doi.org/10.1016/B978-93-80308-42-5.50007-X>
64. Meksi N, Haddar W, Hammami S, Mhenni MF (2012) Olive mill wastewater: a potential source of natural dyes for textile dyeing. *Ind Crops Prod* 40:103–109. doi:10.1016/j.indcrop.2012.03.011
65. Nasirizadeh N, Dehghanizadeh H, Yazdanshenas ME, Moghadam MR, Karimi A (2012) Optimization of wool dyeing with rutin as natural dye by central composite design method. *Ind Crops Prod* 40:361–366. doi:10.1016/j.indcrop.2012.03.035
66. Haddar W, Elksibi I, Meksi N, Mhenni MF (2014) Valorization of the leaves of fennel (*Foeniculum vulgare*) as natural dyes fixed on modified cotton: a dyeing process optimization based on a response surface methodology. *Ind Crops Prod* 52:588–596. doi:10.1016/j.indcrop.2013.11.019
67. Punrattanasin N, Nakpathom M, Somboon B, Narumol N, Rungruangkitkrai N, Mongkholrattanasit R (2013) Silk fabric dyeing with natural dye from mangrove bark (*Rhizophora apiculata* Blume) extract. *Ind Crops Prod* 49:122–129. doi:10.1016/j.indcrop.2013.04.041
68. Jabasingh SA, Sahu P, Yimam A (2016) Enviro-friendly biofinishing of cotton fibers using *Aspergillus nidulans* AJSU04 cellulases for enhanced uptake of Myrobalan dye from *Terminalia chebula*. *Dyes Pigment* 129:129–140. doi:10.1016/j.dyepig.2016.02.019
69. Payne A (2015) Open- and closed-loop recycling of textile and apparel products. In: Muthu SS (ed) *Handbook of life cycle assessment (LCA) of textiles and clothing*. Woodhead Publishing, Sawston, Cambridge, UK, pp 103–123. doi:10.1016/B978-0-08-100169-1.00006-X
70. Joung H-M, Park-Poaps H (2013) Factors motivating and influencing clothing disposal behaviours. *Int J Consum Stud* 37(1):105–111. doi:10.1111/j.1470-6431.2011.01048.x
71. Wallander M (2012) Why textile waste should be banned from landfills. Retrieved October 5:2013
72. Mitchell JL, Carr DJ, Niven BE, Harrison K, Girvan E (2012) Physical and mechanical degradation of shirting fabrics in burial conditions. *Forensic Sci Int* 222(1–3):94–101. doi:10.1016/j.forsciint.2012.05.005
73. The Science Learning Hub (2008) Measuring biodegradability. The University of Waikato, New Zealand. Available via University of Waikato, New Zealand. <http://sciencelearn.org.nz/Contexts/Enviro-imprints/Looking-Closer/Measuring-biodegradability>. Accessed 19 June 2016
74. Li L, Frey M, Browning KJ (2010) Biodegradability study on cotton and polyester fabrics. *J Eng Fiber Fabr* 5(4):42–53
75. IWTO (2016) Wool and Biodegradability. International Wool Textile Organization (IWTO). http://www.iwto.org/uploaded/Fact_Sheets/Wool_and_Biodegradability_IWTO_Fact_Sheet_update.pdf. Accessed 31 July 2016
76. Khubaib A, Muhammad M (2011) Biodegradation of Textile Materials University of Borås, Sweden
77. Tojo N (2012) Prevention of textile waste: material flows of textiles in three Nordic countries and suggestions on policy instruments. Nordic council of ministers, Copenhagen
78. Ryu C, Phan AN, Sharifi VN, Swithenbank J (2007) Combustion of textile residues in a packed bed. *Exp Therm Fluid Sci* 31(8):887–895. doi:10.1016/j.expthermflusc.2006.09.004
79. WHO (2016) Dioxins and their effects on human health. World Health Organization. <http://www.who.int/mediacentre/factsheets/fs225/en/>. Accessed 1 May 2016

80. Wanassi B, Azzouz B, Hassen MB (2016) Value-added waste cotton yarn: optimization of recycling process and spinning of reclaimed fibers. *Ind Crops Prod* 87:27–32
81. Binici H, Gemci R, Aksogan O, Kaplan H (2010) Insulation properties of bricks made with cotton and textile ash wastes. *Int J Mater Res* 101(7):894–899. doi:[10.3139/146.110348](https://doi.org/10.3139/146.110348)
82. Bediako JK, Wei W, Yun Y-S (2016) Low-cost renewable adsorbent developed from waste textile fabric and its application to heavy metal adsorption. *J Taiwan Inst Chem Eng* 63:250–258. doi:[10.1016/j.jtice.2016.03.009](https://doi.org/10.1016/j.jtice.2016.03.009)
83. Algin HM, Turgut P (2008) Cotton and limestone powder wastes as brick material. *Constr Build Mater* 22(6):1074–1080. doi:[10.1016/j.conbuildmat.2007.03.006](https://doi.org/10.1016/j.conbuildmat.2007.03.006)
84. Binici H, Temiz H, Aksoğan O, Ulusoy A (2009) The engineering properties of fired brick incorporating textile waste ash and basaltic pumice. *J Fac Eng Archit Gaz* 24(3):485–498
85. Binici H, Gemci R, Kucukonder A, Solak HH (2012) Investigating sound insulation, thermal conductivity and radioactivity of chipboards produced with cotton waste, fly ash and barite. *Constr Build Mater* 30:826–832. doi:[10.1016/j.conbuildmat.2011.12.064](https://doi.org/10.1016/j.conbuildmat.2011.12.064)
86. Fattahi Meyabadi T, Dadashian F, Mir Mohammad Sadeghi G, Ebrahimi Zanjani Asl H (2014) Spherical cellulose nanoparticles preparation from waste cotton using a green method. *Powder Technol* 261:232–240. doi:[10.1016/j.powtec.2014.04.039](https://doi.org/10.1016/j.powtec.2014.04.039)
87. Sun X, Lu C, Liu Y, Zhang W, Zhang X (2014) Melt-processed poly(vinyl alcohol) composites filled with microcrystalline cellulose from waste cotton fabrics. *Carbohydr Polym* 101:642–649. doi:[10.1016/j.carbpol.2013.09.088](https://doi.org/10.1016/j.carbpol.2013.09.088)
88. Dobircau L, Sreekumar PA, Saiah R, Leblanc N, Terrié C, Gattin R, Saiter JM (2009) Wheat flour thermoplastic matrix reinforced by waste cotton fibre: agro-green-composites. *Compos A* 40(4):329–334. doi:[10.1016/j.compositesa.2008.11.004](https://doi.org/10.1016/j.compositesa.2008.11.004)
89. Ramamoorthy SK, Persson A, Skrifvars M (2014) Reusing textile waste as reinforcements in composites. *J Appl Polym Sci* 131(17):16. doi:[10.1002/app.40687](https://doi.org/10.1002/app.40687)
90. Bodur MS, Bakkal M, Savas M, Berkalp OB (2014) A new approach for the development of textile waste cotton reinforced composites (T-FRP): laminated hybridization vs. coupling agents. *J Polym Eng* 34(7):639–648. doi:[10.1515/polyeng-2013-0281](https://doi.org/10.1515/polyeng-2013-0281)
91. Briga-Sá A, Nascimento D, Teixeira N, Pinto J, Caldeira F, Varum H, Paiva A (2013) Textile waste as an alternative thermal insulation building material solution. *Constr Build Mater* 38:155–160. doi:[10.1016/j.conbuildmat.2012.08.037](https://doi.org/10.1016/j.conbuildmat.2012.08.037)
92. Zou Y, Reddy N, Yang Y (2011) Reusing polyester/cotton blend fabrics for composites. *Compos B* 42(4):763–770. doi:[10.1016/j.compositesb.2011.01.022](https://doi.org/10.1016/j.compositesb.2011.01.022)
93. Bakkal M, Bodur MS, Berkalp OB, Yilmaz S (2012) The effect of reprocessing on the mechanical properties of the waste fabric reinforced composites. *J Mater Process Technol* 212(11):2541–2548. doi:[10.1016/j.jmatprotec.2012.03.008](https://doi.org/10.1016/j.jmatprotec.2012.03.008)
94. Wilkins TA, Arpat AB (2005) The cotton fiber transcriptome. *Physiol Plant* 124(3):295–300
95. Anderson DB, Kerr T (1938) Growth and structure of cotton fiber. *Ind Eng Chem* 30(1):48–54
96. Quiroz-Castañeda RE, Folch-Mallol JL (2013) Hydrolysis of biomass mediated by cellulases for the production of sugars. In: Chandel AK, Silva SSD (eds) Sustainable degradation of lignocellulosic biomass techniques, applications and commercialization. InTech, Rijeka, pp 119–155
97. Ruel K, Nishiyama Y, Joseleau J-P (2012) Crystalline and amorphous cellulose in the secondary walls of Arabidopsis. *Plant Sci* 193–194:48–61. doi:[10.1016/j.plantsci.2012.05.008](https://doi.org/10.1016/j.plantsci.2012.05.008)
98. Bisaria V, Martin A (1991) Bioprocessing of agro-residues to glucose and chemicals. In: Martin AM (ed) Bioconversion of waste materials to industrial products. Elsevier, Barking, pp 187–223
99. Pensupa N, Jin M, Kokolski M, Archer DB, Du C (2013) A solid state fungal fermentation-based strategy for the hydrolysis of wheat straw. *Bioresour Technol* 149:261–267
100. Sternberg D (1975) Production of cellulase by *Trichoderma*. In: Biotechnology and bioengineering symposium, pp 35–53
101. Gusakov AV (2011) Alternatives to *Trichoderma reesei* in biofuel production. *Trends Biotechnol* 29(9):419–425. doi:[10.1016/j.tibtech.2011.04.004](https://doi.org/10.1016/j.tibtech.2011.04.004)
102. Merino ST, Cherry J (2007) Progress and challenges in enzyme development for biomass utilization. In: Olsson L. (eds) Biofuels. Advances in Biochemical Engineering/Biotechnology, vol 108. Springer, Berlin, p 95–120
103. Bommarius AS, Sohn M, Kang Y, Lee JH, Realff MJ (2014) Protein engineering of cellulases. *Curr Opin Biotechnol* 29:139–145
104. Béguin P, Aubert JP (1994) The biological degradation of cellulose. *FEMS Microbiol Rev* 13(1):25–58

105. Liu H, Sun J, Leu SY, Chen S (2016) Toward a fundamental understanding of cellulase-lignin interactions in the whole slurry enzymatic saccharification process. *Biofuels Bioprod Biorefin*. doi:[10.1002/bbb.1670](https://doi.org/10.1002/bbb.1670)
106. Linder M, Teeri TT (1997) Biochemistry and genetics of cellulases and hemicellulases and their application. The roles and function of cellulose-binding domains. *J Biotechnol* 57(1):15–28. doi:[10.1016/S0168-1656\(97\)00087-4](https://doi.org/10.1016/S0168-1656(97)00087-4)
107. Jeoh T, Ishizawa CI, Davis MF, Himmel ME, Adney WS, Johnson DK (2007) Cellulase digestibility of pretreated biomass is limited by cellulose accessibility. *Biotechnol Bioeng* 98(1):112–122
108. Tzi BN, Randy C (2011) *Cellulase: types and action, mechanism, and uses*. Nova Science Publisher, New York
109. Leu SY, Zhu J (2012) Substrate-related factors affecting enzymatic saccharification of lignocelluloses: our recent understanding. *Bioenergy Res* 6:1–11
110. Chang VS, Holtzapple MT (2000) Fundamental factors affecting biomass enzymatic reactivity. In: Sachs J (ed) *Twenty-first symposium on biotechnology for fuels and chemicals*. Springer, Sawston, pp 5–37
111. Hall M, Bansal P, Lee JH, Realff MJ, Bommarius AS (2010) Cellulose crystallinity—a key predictor of the enzymatic hydrolysis rate. *FEBS J* 277(6):1571–1582
112. Choi WI (2016) Effects of Physical Pretreatment by a Continuous Twin Screw-driven Reactor (CTSR) on the Enzymatic Hydrolysis of *Miscanthus sinensis* var. *purpurascens*. In: 38th Symposium on Biotechnology for Fuels and Chemicals. Simb
113. Alvira P, Tomás-Pejó E, Ballesteros M, Negro M (2010) Pretreatment technologies for an efficient bioethanol production process based on enzymatic hydrolysis: a review. *Bioresour Technol* 101(13):4851–4861
114. Kumar R, Wyman CE (2009) Does change in accessibility with conversion depend on both the substrate and pretreatment technology? *Bioresour Technol* 100(18):4193–4202
115. Puri VP (1984) Effect of crystallinity and degree of polymerization of cellulose on enzymatic saccharification. *Biotechnol Bioeng* 26(10):1219–1222
116. Klemm D, Heublein B, Fink HP, Bohn A (2005) Cellulose: fascinating biopolymer and sustainable raw material. *Angew Chem Int Ed* 44(22):3358–3393
117. Mansfield SD, Mooney C, Saddler JN (1999) Substrate and enzyme characteristics that limit cellulose hydrolysis. *Biotechnol Prog* 15(5):804–816
118. Sun Y, Cheng J (2002) Hydrolysis of lignocellulosic materials for ethanol production: a review. *Bioresour Technol* 83(1):1–11
119. Caulfield DF, Moore WE (1974) Effect of varying crystallinity of cellulose on enzymic hydrolysis. *Wood Sci* 6(4):375–379. Food and Agricultural Organisation of the United Nation. <http://agris.fao.org/agris-search/search.do?recordID=US201303161990>. Accessed 12 Aug 2017
120. Chandra RP, Bura R, Mabey W, Berlin DA, Pan X, Saddler J (2007) Substrate pretreatment: The key to effective enzymatic hydrolysis of lignocellulosics? *Biofuels*. Springer, Berlin, pp 67–93
121. Zhang YHP, Lynd LR (2004) Toward an aggregated understanding of enzymatic hydrolysis of cellulose: noncomplexed cellulase systems. *Biotechnol Bioeng* 88(7):797–824
122. Chu CY, Wu SY, Tsai CY, Lin CY (2011) Kinetics of cotton cellulose hydrolysis using concentrated acid and fermentative hydrogen production from hydrolysate. *Int J Hydrogen Energy* 36(14):8743–8750
123. Shen F, Xiao W, Lin L, Yang G, Zhang Y, Deng S (2013) Enzymatic saccharification coupling with polyester recovery from cotton-based waste textiles by phosphoric acid pretreatment. *Bioresour Technol* 130:248–255. doi:[10.1016/j.biortech.2012.12.025](https://doi.org/10.1016/j.biortech.2012.12.025)
124. Kuo CH, Lin PJ, Wu YQ, Ye LY, Yang DJ, Shieh CJ, Lee CK (2014) Simultaneous saccharification and fermentation of waste textiles for ethanol production. *BioResources* 9(2):2866–2875
125. Arthe R, Rajesh R, Rajesh E, Rajendran R, Jeyachandran S (2008) Production of bio-ethanol from cellulosic cotton waste through microbial extracellular enzymatic hydrolysis and fermentation. *EJEA Chem* 7(6):2984–2992
126. Mahalakshmi M, Angayarkanni J, Rajendran R, Rajesh R (2011) Bioconversion of cotton waste from textile mills to bioethanol by microbial saccharification and fermentation. *Ann Biol Res* 2(3):380–388
127. Ouchi A, Toida T, Kumaresan S, Ando W, Kato J (2010) A new methodology to recycle polyester from fabric blends with cellulose. *Cellulose* 17(1):215–222

128. Jeihanipour A, Taherzadeh MJ (2009) Ethanol production from cotton-based waste textiles. *Bioresour Technol* 100(2):1007–1010. doi:[10.1016/j.biortech.2008.07.020](https://doi.org/10.1016/j.biortech.2008.07.020)
129. Jeihanipour A, Karimi K, Niklasson C, Taherzadeh MJ (2010) A novel process for ethanol or biogas production from cellulose in blended-fibers waste textiles. *Waste Manag* 30(12):2504–2509. doi:[10.1016/j.wasman.2010.06.026](https://doi.org/10.1016/j.wasman.2010.06.026)
130. Sankauskaite A, Stygiene L, Tumeniene MD, Krauledas S, Jovaisiene L, Puodziuniene R (2014) Investigation of cotton component destruction in cotton/polyester blended textile waste materials. *Mater Sci* 20(2):189–192
131. Csiszar E, Urbánszki K, Szakacs G (2001) Biotreatment of desized cotton fabric by commercial cellulase and xylanase enzymes. *J Mol Catal B Enzym* 11(4):1065–1072
132. Khan MMR, Mondal MIH (2012) Bleach washing combined with pumice stone for the modification of denim garments. *Orient J Chem* 28(3):1241–1242
133. Vasconcelos A, Cavaco-Paulo A (2006) Enzymatic removal of cellulose from cotton/polyester fabric blends. *Cellulose* 13(5):611–618
134. Hong F, Guo X, Zhang S, S-f Han, Yang G, Jönsson LJ (2012) Bacterial cellulose production from cotton-based waste textiles: enzymatic saccharification enhanced by ionic liquid pretreatment. *Bioresour Technol* 104:503–508. doi:[10.1016/j.biortech.2011.11.028](https://doi.org/10.1016/j.biortech.2011.11.028)
135. De Silva R, Wang X, Byrne N (2014) Recycling textiles: the use of ionic liquids in the separation of cotton polyester blends. *RSC Adv* 4(55):29094–29098
136. Sun Y, Lin L, Pang C, Deng H, Peng H, Li J, He B, Liu S (2007) Hydrolysis of cotton fiber cellulose in formic acid. *Energy Fuels* 21(4):2386–2389
137. Farone WA, Cuzens JE (1996) Method of producing sugars using strong acid hydrolysis of cellulosic and hemicellulosic materials. Google patents
138. Wooley R, Ruth M, Sheehan J, Ibsen K, Majdeski H, Galvez A (1999) Lignocellulosic biomass to ethanol process design and economics utilizing co-current dilute acid prehydrolysis and enzymatic hydrolysis current and futuristic scenarios. DTIC document
139. Mosier N, Wyman C, Dale B, Elander R, Lee Y, Holtzapple M, Ladisch M (2005) Features of promising technologies for pretreatment of lignocellulosic biomass. *Bioresour Technol* 96(6):673–686
140. Von Sivers M, Zacchi G (1995) A techno-economical comparison of three processes for the production of ethanol from pine. *Bioresour Technol* 51(1):43–52
141. Wyman CE, Dale BE, Elander RT, Holtzapple M, Ladisch MR, Lee Y (2005) Coordinated development of leading biomass pretreatment technologies. *Bioresour Technol* 96(18):1959–1966
142. Silverstein RA, Chen Y, Sharma-Shivappa RR, Boyette MD, Osborne J (2007) A comparison of chemical pretreatment methods for improving saccharification of cotton stalks. *Bioresour Technol* 98(16):3000–3011
143. Öztürk HB, Abu-Rous M, MacNaughtan B, Schuster KC, Mitchell JR, Bechtold T (2010) Changes in the inter- and intra-fibrillar structure of lyocell (TENCEL®) fibers after KOH treatment. In: Heinze T, Janura M, Koschella A (eds) *Macromolecular symposia*, vol 2. Wiley Online Library, pp 24–37
144. Holtzapple MT, Davison RR, Nagwani M (1997) Calcium hydroxide pretreatment of biomass. Google patents
145. Chang VS, Burr B, Holtzapple MT (1997) Lime pretreatment of switchgrass. In: Sachs J (ed) *Biotechnology for fuels and chemicals*. Springer, Sawston, pp 3–19
146. Heinze T, Koschella A (2005) Solvents applied in the field of cellulose chemistry: a mini review. *Polimeros* 15(2):84–90
147. Cai J, Zhang L, Zhou J, Li H, Chen H, Jin H (2004) Novel fibers prepared from cellulose in NaOH/urea aqueous solution. *Macromol Rapid Commun* 25(17):1558–1562
148. Kamida K, Okajima K, Matsui T, Kowsaka K (1984) Study on the solubility of cellulose in aqueous alkali solution by deuteration IR and ¹³C NMR. *Polym J* 16(12):857–866
149. Wang Y (2008) Cellulose fiber dissolution in sodium hydroxide solution at low temperature: dissolution kinetics and solubility improvement. ProQuest
150. Zhou Q, Zhang L, Li M, Wu X, Cheng G (2005) Homogeneous hydroxyethylation of cellulose in NaOH/urea aqueous solution. *Polym Bull* 53(4):243–248
151. Tan HT, Lee KT, Mohamed AR (2011) Pretreatment of lignocellulosic palm biomass using a solvent-ionic liquid [BMIM] Cl for glucose recovery: an optimisation study using response surface methodology. *Carbohydr Polym* 83(4):1862–1868

152. Singh S, Simmons BA, Vogel KP (2009) Visualization of biomass solubilization and cellulose regeneration during ionic liquid pretreatment of switchgrass. *Biotechnol Bioeng* 104(1):68–75
153. Mäki-Arvela P, Anugwom I, Virtanen P, Sjöholm R, Mikkola J-P (2010) Dissolution of lignocellulosic materials and its constituents using ionic liquids—a review. *Ind Crops Prod* 32(3):175–201
154. Swatloski RP, Spear SK, Holbrey JD, Rogers RD (2002) Dissolution of cellulose with ionic liquids. *J Am Chem Soc* 124(18):4974–4975
155. Hayes DJ (2009) An examination of biorefining processes, catalysts and challenges. *Catal Today* 145(1):138–151
156. Swatloski R, Rogers R, Holbrey J (2003) University of Alabama. USA, WO Patent 3:029329
157. Zhao D, Liao Y, Zhang Z (2007) Toxicity of ionic liquids. *Clean Soil Air Water* 35(1):42–48
158. Fu D, Mazza G (2011) Aqueous ionic liquid pretreatment of straw. *Bioresour Technol* 102(13):7008–7011
159. Brodeur G, Yau E, Badal K, Collier J, Ramachandran K, Ramakrishnan S (2011) Chemical and physicochemical pretreatment of lignocellulosic biomass: a review. *Enzyme Res* 2011:787532
160. Schacht C, Zetzl C, Brunner G (2008) From plant materials to ethanol by means of supercritical fluid technology. *J Supercrit Fluids* 46(3):299–321
161. Gu T, Held MA, Faik A (2013) Supercritical CO₂ and ionic liquids for the pretreatment of lignocellulosic biomass in bioethanol production. *Environ Technol* 34(13–14):1735–1749
162. Saka S, Ueno T (1999) Chemical conversion of various celluloses to glucose and its derivatives in supercritical water. *Cellulose* 6(3):177–191. doi:[10.1023/a:1009232508644](https://doi.org/10.1023/a:1009232508644)
163. Muratov G, Kim C (2002) Enzymatic hydrolysis of cotton fibers in supercritical CO₂. *Biotechnol Bioprocess Eng* 7(2):85–88. doi:[10.1007/bf02935884](https://doi.org/10.1007/bf02935884)
164. Kabongo JD (2013) Waste Valorization. In: Idowu SO, Capaldi N, Zu L, Gupta AD (eds) *Encyclopedia of corporate social responsibility*. Springer, Berlin, pp 2701–2706. doi:[10.1007/978-3-642-28036-8_680](https://doi.org/10.1007/978-3-642-28036-8_680)
165. Senthilkumar M, Gnanapragasam G, Arutchelvan V, Nagarajan S (2011) Treatment of textile dyeing wastewater using two-phase pilot plant UASB reactor with sago wastewater as co-substrate. *Chem Eng J* 166(1):10–14. doi:[10.1016/j.cej.2010.07.057](https://doi.org/10.1016/j.cej.2010.07.057)
166. Wang J, Yan J, Xu W (2015) Treatment of dyeing wastewater by MIC anaerobic reactor. *Biochem Eng J* 101:179–184. doi:[10.1016/j.bej.2015.06.001](https://doi.org/10.1016/j.bej.2015.06.001)
167. Gnanapragasam G, Senthilkumar M, Arutchelvan V, Velayutham T, Nagarajan S (2011) Bio-kinetic analysis on treatment of textile dye wastewater using anaerobic batch reactor. *Bioresour Technol* 102(2):627–632. doi:[10.1016/j.biortech.2010.08.012](https://doi.org/10.1016/j.biortech.2010.08.012)
168. Lay CH, Kuo SY, Sen B, Chen CC, Chang JS, Lin CY (2012) Fermentative biohydrogen production from starch-containing textile wastewater. *Int J Hydrogen Energy* 37(2):2050–2057. doi:[10.1016/j.ijhydene.2011.08.003](https://doi.org/10.1016/j.ijhydene.2011.08.003)
169. Li YC, Chu CY, Wu SY, Tsai CY, Wang CC, Hung CH, Lin CY (2012) Feasible pretreatment of textile wastewater for dark fermentative hydrogen production. *Int J Hydrogen Energy* 37(20):15511–15517. doi:[10.1016/j.ijhydene.2012.03.131](https://doi.org/10.1016/j.ijhydene.2012.03.131)
170. Opwisa K, Gutmanna JS (2012) Generation of biogas from textile waste waters. *Chem Eng* 27:103–108
171. Apollo S, Onyango MS, Ochieng A (2014) Integrated UV photodegradation and anaerobic digestion of textile dye for efficient biogas production using zeolite. *Chem Eng J* 245:241–247. doi:[10.1016/j.cej.2014.02.027](https://doi.org/10.1016/j.cej.2014.02.027)
172. Kipçak E, Akgün M (2013) *In situ* gas fuel production during the treatment of textile wastewater at supercritical conditions. *Water Sci Technol* 67(5):1058–1067
173. Campbell PE, McMullan JT, Williams BC, Aumann F (2000) Co-combustion of coal and textiles in a small-scale circulating fluidised bed boiler in Germany. *Fuel Process Technol* 67(2):115–129
174. Williams PT, Reed AR (2003) Pre-formed activated carbon matting derived from the pyrolysis of biomass natural fibre textile waste. *J Anal Appl Pyrolysis* 70(2):563–577
175. Nahil MA, Williams PT (2012) Surface chemistry and porosity of nitrogen-containing activated carbons produced from acrylic textile waste. *Chem Eng J* 184:228–237. doi:[10.1016/j.cej.2012.01.047](https://doi.org/10.1016/j.cej.2012.01.047)
176. Miranda R, Sosa-Blanco C, Bustos-Martínez D, Vasile C (2007) Pyrolysis of textile wastes: I. Kinetics and yields. *J Anal Appl Pyrolysis* 80(2):489–495. doi:[10.1016/j.jaap.2007.03.008](https://doi.org/10.1016/j.jaap.2007.03.008)
177. Reed AR, Williams PT (2004) Thermal processing of biomass natural fibre wastes by pyrolysis. *Int J Energy Res* 28(2):131–145

178. Nahil MA, Williams PT (2010) Activated carbons from acrylic textile waste. *J Anal Appl Pyrolysis* 89(1):51–59. doi:[10.1016/j.jaap.2010.05.005](https://doi.org/10.1016/j.jaap.2010.05.005)
179. Dong C, Zhang H, Pang Z, Liu Y, Zhang F (2013) Sulfonated modification of cotton linter and its application as adsorbent for high-efficiency removal of lead(II) in effluent. *Bioresour Technol* 146:512–518. doi:[10.1016/j.biortech.2013.07.108](https://doi.org/10.1016/j.biortech.2013.07.108)
180. Sun Y, Yue Q, Gao B, Li Q, Huang L, Yao F, Xu X (2012) Preparation of activated carbon derived from cotton linter fibers by fused NaOH activation and its application for oxytetracycline (OTC) adsorption. *J Colloid Interface Sci* 368(1):521–527. doi:[10.1016/j.jcis.2011.10.067](https://doi.org/10.1016/j.jcis.2011.10.067)
181. Jieying Z, Zhao Q, Ye Z (2014) Preparation and characterization of activated carbon fiber (ACF) from cotton woven waste. *Appl Surf Sci* 299:86–91. doi:[10.1016/j.apsusc.2014.01.190](https://doi.org/10.1016/j.apsusc.2014.01.190)
182. Binici H, Eken M, Dolaz M, Aksogan O, Kara M (2014) An environmentally friendly thermal insulation material from sunflower stalk, textile waste and stubble fibres. *Constr Build Mater* 51:24–33. doi:[10.1016/j.conbuildmat.2013.10.038](https://doi.org/10.1016/j.conbuildmat.2013.10.038)
183. Vasconcelos G, Lourenço PB, Camões A, Martins A, Cunha S (2015) Evaluation of the performance of recycled textile fibres in the mechanical behaviour of a gypsum and cork composite material. *Cem Concr Compos* 58:29–39. doi:[10.1016/j.cemconcomp.2015.01.001](https://doi.org/10.1016/j.cemconcomp.2015.01.001)
184. Yasinskaya NN, Karpenya AM, Chukasova-Il'yushkina EV (2010) Experimental study and optimization of the composition of heat-insulating tiles made of textile production wastes. *Fibre Chem* 42:44–46
185. Karpenya AM, Kogan AG, Goncharenok YP (2009) Fabrication of organic synthetic fibre plates using short-fibre textile wastes. *Fibre Chem* 41(5):337–340
186. Aghae K, Foroughi M (2013) Mechanical properties of lightweight concrete partition with a core of textile waste. *Adv Civ Eng* 2013:1–7. doi:[10.1155/2013/482310](https://doi.org/10.1155/2013/482310)
187. Xue T, Wang ZJW (2010) Preparation of porous SiC ceramics from waste cotton linter by reactive liquid Si infiltration technique. *Mater Sci Eng A* 527(27):7294–7298
188. Yalcin I, Sadikoglu TG, Berkalp OB, Bakkal M (2013) Utilization of various non-woven waste forms as reinforcement in polymeric composites. *Text Res J* 83:0040517512474366
189. Haule LV, Carr CM, Rigout M (2016) Preparation and physical properties of regenerated cellulose fibres from cotton waste garments. *J Clean Prod* 112:4445–4451. doi:[10.1016/j.jclepro.2015.08.086](https://doi.org/10.1016/j.jclepro.2015.08.086)
190. Lokhande H, Gotmare V (1999) Utilization of textile loomwaste as a highly absorbent polymer through graft co-polymerization. *Bioresour Technol* 68(3):283–286
191. Rahman A, Urabe T, Kishimoto N, Mizuhara S (2015) Effects of waste glass additions on quality of textile sludge-based bricks. *Environ Technol* 36(19):2443–2450
192. Monier M, Akl MA, Ali WM (2014) Modification and characterization of cellulose cotton fibers for fast extraction of some precious metal ions. *Int J Biol Macromol* 66:125–134. doi:[10.1016/j.ijbiomac.2014.01.068](https://doi.org/10.1016/j.ijbiomac.2014.01.068)
193. Le Marechal AM, Križanec B, Vajnhandl S, Valh JV (2012) Textile finishing industry as an important source of organic pollutants. In: *Organic pollutants 10 years after the Stockholm convention-environmental and analytical update*
194. Gholamzad E, Karimi K, Masoomi M (2014) Effective conversion of waste polyester–cotton textile to ethanol and recovery of polyester by alkaline pretreatment. *Chem Eng J* 253:40–45. doi:[10.1016/j.cej.2014.04.109](https://doi.org/10.1016/j.cej.2014.04.109)
195. Kuo CH, Lin PJ, Lee CK (2010) Enzymatic saccharification of dissolution pretreated waste cellulosic fabrics for bacterial cellulose production by *Gluconacetobacter xylinus*. *J Chem Technol Biotechnol* 85(10):1346–1352. doi:[10.1002/jctb.2439](https://doi.org/10.1002/jctb.2439)
196. Adnan C, Xiang G, Shui-Jia T, Sandra W, Leif JJ, Feng H (2013) Production of bacterial cellulose and enzyme from waste fiber sludge. *Biotechnol Biofuels* 6:25
197. Guo X, Chen L, Tang J, Jönsson LJ, Hong FF (2016) Production of bacterial nanocellulose and enzyme from [AMIM]Cl-pretreated waste cotton fabrics: effects of dyes on enzymatic saccharification and nanocellulose production. *J Chem Technol Biotechnol* 91(5):1413–1421. doi:[10.1002/jctb.4738](https://doi.org/10.1002/jctb.4738)
198. Jeehanipour A, Aslanzadeh S, Rajendran K, Balasubramanian G, Taherzadeh MJ (2013) High-rate biogas production from waste textiles using a two-stage process. *Renewable Energy* 52:128–135
199. Namasivayam C, Yamuna R (1992) Removal of rhodamine-B by biogas waste slurry from aqueous solution. *Water Air Soil Pollut* 65(1–2):101–109
200. Kabir MM, Forgács G, Horváth IS (2013) Enhanced methane production from wool textile residues by thermal and enzymatic pretreatment. *Process Biochem* 48(4):575–580

201. Scheirs J (1998) Polymer recycling: science, technology and applications. John Wiley & Sons Ltd, Journals, Baffins Lane, Chichester, Sussex PO 19 1 UD, UK, 1998 591
202. Wang Y (2006) Recycling in textiles. Woodhead publishing, UK
203. Wang Y (2010) Fiber and textile waste utilization. Waste Biomass Valor 1(1):135–143
204. McCrum NG, Buckley C, Bucknall CB (1997) Principles of polymer engineering. Oxford University Press, Oxford



Green and Sustainable Separation of Natural Products from Agro-Industrial Waste: Challenges, Potentialities, and Perspectives on Emerging Approaches

Vânia G. Zuin^{1,2} · Luíze Z. Ramin¹

Received: 30 August 2017 / Accepted: 26 December 2017 / Published online: 17 January 2018
© The Author(s) 2018. This article is an open access publication

Abstract New generations of biorefinery combine innovative biomass waste resources from different origins, chemical extraction and/or synthesis of biomaterials, biofuels, and bioenergy via green and sustainable processes. From the very beginning, identifying and evaluating all potentially high value-added chemicals that could be removed from available renewable feedstocks requires robust, efficient, selective, reproducible, and benign analytical approaches. With this in mind, green and sustainable separation of natural products from agro-industrial waste is clearly attractive considering both socio-environmental and economic aspects. In this paper, the concepts of green and sustainable separation of natural products will be discussed, highlighting the main studies conducted on this topic over the last 10 years. The principal analytical techniques (such as solvent, microwave, ultrasound, and supercritical treatments), by-products (e.g., citrus, coffee, corn, and sugarcane waste) and target compounds (polyphenols, proteins, essential oils, etc.) will be presented, including the emerging green and sustainable separation approaches towards bioeconomy and circular economy contexts.

Keywords Green and sustainable extraction · Sustainable separation · Green analytical techniques · Biomass waste · Biorefinery · Bioeconomy and circular economy

Chapter 8 was originally published as Zuin, V. G. & Ramin, L. Z. Top Curr Chem (Z) (2018) 376: 3. <https://doi.org/10.1007/s41061-017-0182-z>.

✉ Vânia G. Zuin
vaniaz@ufscar.br; vania.zuin@york.ac.uk

¹ Department of Chemistry, Federal University of São Carlos, Rod. Washington Luís, km 235, São Carlos 13565-905, Brazil

² Green Chemistry Centre of Excellence, University of York, North Yorkshire YO10 5DD, UK

1 Introduction

Currently, it can be observed that global sustainability challenges are all closely interconnected, such as pollution, climate change, biodiversity loss, poverty, energy, and food security. As stated by Liu et al. [1], only holistic and disruptive approaches integrating various components of human and natural systems are effective in identifying and proposing suitable solutions for these challenges, especially those related to research, development, and innovation (RD&I) in interdisciplinary and transdisciplinary studies. To exemplify this systemic view, Fig. 1 illustrates the Earth surface that, based on the “Dymaxion map” (the Fuller Projection Map), shows the planet as a continuum without splitting any continents, seas, and oceans, where cycles are integrated through flows of matter, energy, and information [1, 2]. Here, Brazil, China, the Caribbean, and Africa interact across space, time, and organizational levels in many ways. For instance, the expansion of soybean production aggravates deforestation in Brazil, but also provides food and feedstock to China. The food trade between both countries also affects other areas, including the Caribbean and Africa. Dust particles from the Sahara Desert, also increased due to unbalanced agricultural practices, can reach the Caribbean and have an impact on coral reefs and soil fertility, diminishing tourism in this region. In addition, nutrient-rich particles from Africa can reach Brazil, improving its forest productivity.

According to the Director-General of the Food and Agriculture Organization (FAO) of the United Nations [3], after years of progress, world hunger has increased since 2015. Around 60% of the world’s starving people are from countries affected by conflict and climate change, including northeast Nigeria, Somalia, South Sudan, and Yemen with 20 million people, often suffering extreme climatic events such as droughts and floods. Not surprisingly, some of the FAO’s top priorities for the next

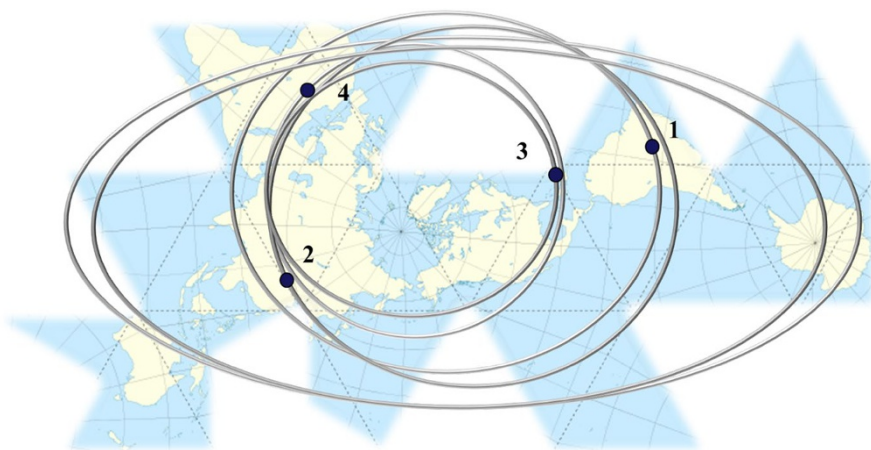


Fig. 1 Representation of an integrated planetary flow system based on the Dymaxion map, emphasizing some coupled cycles related to food production and socio-environmental impacts among (1) Brazil, (2) China, (3) the Caribbean, and (4) the Sahara Desert. Adapted from [1]

2 years include topics such as sustainable agriculture, climate change mitigation and adaptation, water scarcity and support of subsistence rural practices, and fisheries and forestry [3, 4]. The challenges related to this demanding context can be intensified and better understood when taking into account that the world population is expected to increase by about 30% over the next 35 years, reaching more than 9.5 billion people in 2050 and 11.2 billion in 2100 [5].

As pointed out by Xia et al. [6], the global food waste of approximately 1.3 billion tons per year is shocking in this context and, although it should be avoided or minimized, it cannot be completely prevented nowadays. Primary and secondary processing generates unpreventable food supply chain waste. This can be due to a number of factors along the supply chain, differing by the commodity and country in question. In general terms, developing countries such as some African countries suffer the greatest loss during the early, upstream part of the primary processing, corresponding to 75% of food losses during production and postharvest. Various initiatives, e.g., building better infrastructure through knowledge transfer (more efficient storage and transport technologies) and improving collaboration and market opportunities in the food supply chain could have a positive role. In industrialized countries, waste occurs especially in the consumption stage, accounting for 50% of overall loss of crops in some countries of North America, Europe, and Oceania. In this case, together with educational and cultural actions, other aspects such as developing legislation to make date labels more user-friendly for consumers (sell-by, best-before, and consume-by), redesigning packaging characteristics (avoiding the “buy 1 get 2” offers) and retailer marketing strategies should be considered [7].

It is estimated that around 140 billion tons of biomass from the agricultural sector are generated every year in the world [8, 9], and a considerable part is recognized as waste and not conflicting with food availability, e.g., leaves, roots, stalks, bark, bagasse, straw residues, seeds, wood and animal residues. Using alternative strategies to avoid additional losses and produce several high value-added chemicals could minimize the volume of non-renewable materials used today (i.e., roughly 50 billion tons of fossil fuels), enough to greatly reduce greenhouse gas emissions and dependence on non-sustainable resources. Therefore, considering their available volume and practically low costs locally and globally, associated to rich function, structure and chemical heterogeneity, all agro-industrial waste should also be considered for their chemical and material potential, as well as a source of energy [10–13].

An important proposal related to waste hierarchy as a framework for residue management can be seen in Fig. 2 [14, 15], which was reformulated to include agro-industrial waste. In this case, the agro-industrial waste hierarchy has a different meaning from top to bottom, since all biomass is valued as raw material. ‘Prevention’ is an intrinsic part of optimized processes, avoiding overproduction. Therefore, the least probable option is ‘disposal’ as the supply chain is designed to attend sustainable consumption, using all bio-based material generated. Here, sustainable production also includes eco-efficiency, cleaner and green productivity, whereas sustainable consumption allows greener choices to be made by individuals based on eco-procurement, supply chain management, waste minimization, recycling, and resource efficiency measures. Both sustainable production and consumption comprises ‘life-cycle thinking’, aiming at preventing problems shifting from one

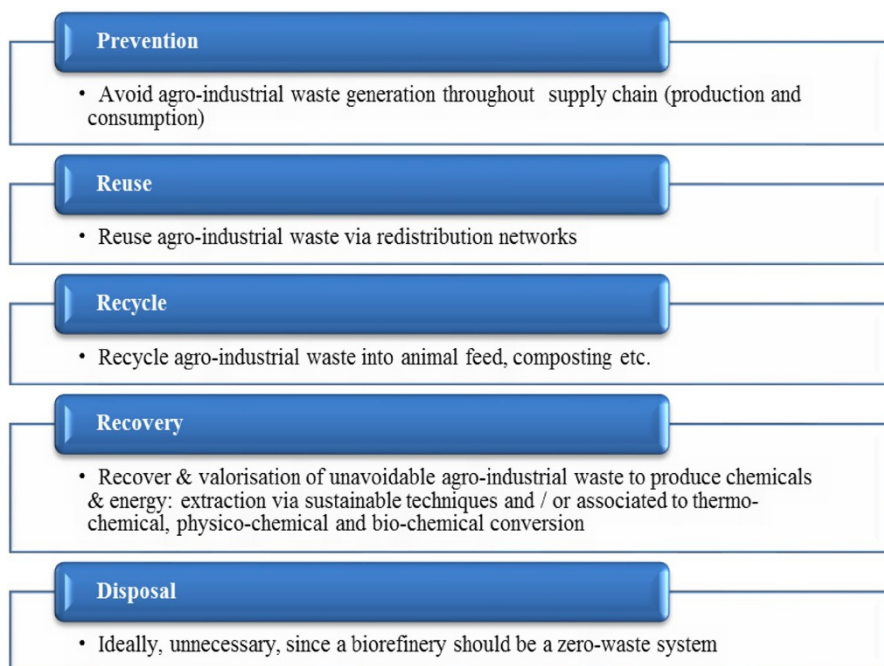


Fig. 2 The agro-industrial waste hierarchy modified from [15]. The main idea is to promote sustainable production and consumption systems through zero-waste biorefinery

life-cycle stage to another, one geographical area or environmental compartment to another.

One of the most important and cited references highlighting the advances in genetics, biotechnology, process chemistry, and engineering that has helped establish a new manufacturing concept to convert renewable biomass into valuable fuels and products, known as biorefinery, was published by Ragauskas and collaborators in the mid-2000s [16]. According to these authors and other researchers [16, 17], integrating biomass and biorefinery technologies has the potential to develop sustainable bio-based energy and materials leading to a new manufacturing paradigm (Fig. 3).

In fact, this paradigm is currently connected to other strong concepts, i.e., bio-economy and circular economy; the latter is described as an industrial system that is restorative by intention and design. This idea replaces the end-of-life notion with regeneration, focusing on the use of renewable energy, elimination of toxic chemicals, reutilization, return and eradication of “waste through the superior design of materials, products, systems, and business models” [18, 19].

As can be noted, new generations of biorefinery combine innovative biomass resources from different origins, chemical extraction and purification and/or synthesis of biomaterials, biofuels and bioenergy via benign processes. From the very beginning, the identification and quantification of all potentially high value-added

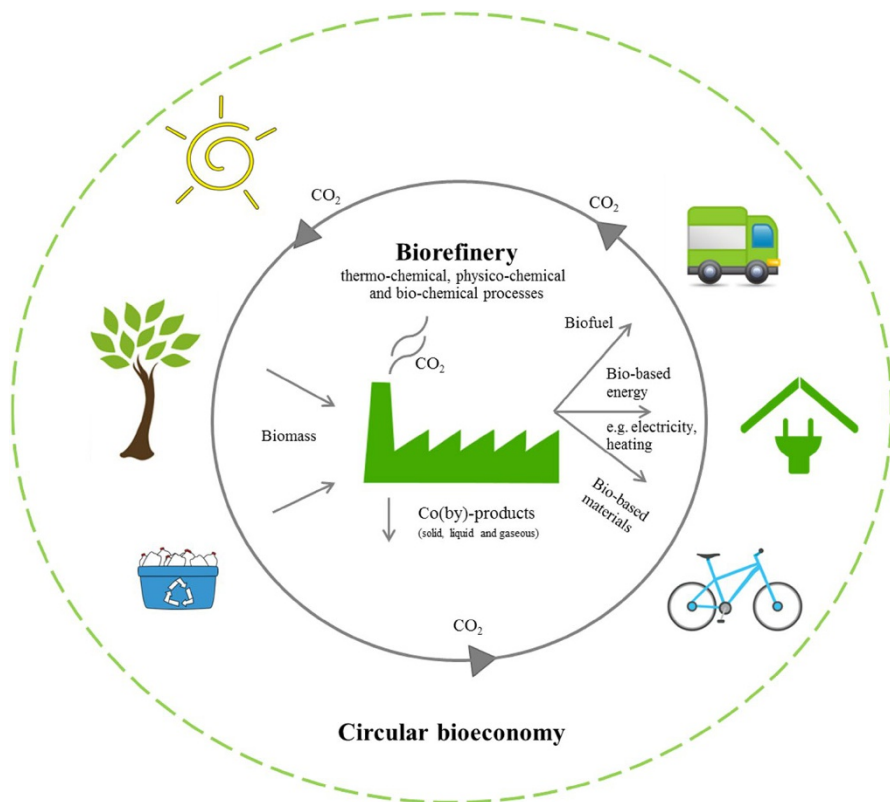


Fig. 3 Holistic biorefinery model integrating biomass, biofuel, biomaterials and bioenergy cycle, based on green and sustainable technologies in the scope of bioeconomy and circular economy. Updated and expanded from [16, 17]

compounds that could be removed from the available renewable feedstocks requires another analytical approach, also connected to green chemistry [20, 21].

2 From Green to Sustainable Separation: Towards Holistic, Flexible, and Zero-Waste Biorefineries

More recently, green extraction and purification have been presented as methods based on establishing processes that reduce energy consumption, using solvents and renewable materials, as well as ensuring a safe and high-quality fraction/product [22]. The aim of their application is to obtain natural products from industrial waste, which is considered a highly attractive initiative [23].

However, a more adequate term for such extraction and purification processes towards vanguard biorefineries could be sustainable separation, adding to the previous green definition, the notion of innovation across all sectors that allows for

increased value in a wide sense, enhancing human and environment benefits and providing economically accessible technologies also advantageous to industry and large scale processing systems. It includes another dimension related to the generation of more creative and healthy jobs, contributing to the construction of a positive long-term sustainability agenda, encompassing bio-circular economy, environmental and social justice [24–27].

Sustainable separation can be defined as a holistic approach grounded on the circular and flexible design and application of renewable benign materials and auxiliaries (including bio-derived solvents, solid phases, membranes) and processes [rooted on green analytical techniques and sustainability metrics and indices, e.g., life cycle analysis (LCA), chemometrics, and other interdisciplinary indicators]. The aim is to optimize the tuneable use of energy, time, reagents, devices, scale, yield and number of steps to extract, fractionate, purify or even modify the components of interest from bio-derived waste during these *in situ* processes, ensuring analytical reproducibility, efficiency, selectivity robustness and scalability, with online evaluation regarding measurable objectives to create safer, healthier, and more efficient products, processes, and services under fair conditions, commercially available at accessible and just prices [28–30].

Natural products are among the most attractive value-added chemicals to be considered, which can be classified as organic compounds formed by living systems divided into three main categories: (1) compounds that occur in all cells and have a central role in their metabolism and reproduction (nucleic acids, amino acids, and sugars), also known as primary metabolites; (2) high-molecular polymeric materials which form cellular structures (cellulose, lignins, and proteins) and; (3) chemicals which are characteristic of a limited number of species, called secondary metabolites [22, 30]. Many of these bioactive compounds (e.g., alkaloids, terpenoids, and phenols) have been extensively used as medicine, nutraceuticals, flavors, fragrances, cosmetics, food additives, antimicrobials, bio-pesticides, etc. However, among the biggest challenges for biomass utilization is establishing benign methods to separate, purify and modify it into chemicals, fuels, and new materials. This is partially due to, with rare exceptions, the small amounts which are lower than 0.01% of the dry weight of vegetal, associated to possible product inhibition issues, large raw material variability, feed detoxification (when necessary), instability of the target compound (or fractions) and its presence in a complex mixture [23, 30].

It is well known that the separation steps, especially extraction, correspond up to 40–80% of the total costs of most common chemical processes currently used. From the point of view of a holistic biorefinery, separation has attracted more and more attention [31]. For instance, for natural products, solvent-based extraction is one of the best options nowadays considering the nature of many bio-based chemicals and matrices, and also the fact that other separation methods, such as those based on chromatography or membranes, do not have the same advantages taking into account commercial scales [32].

It is expected that high value-added components from biomass waste such as essential oils, polyphenols, and other food or medicinal-related products are extracted first, followed by polysaccharides, lignocelluloses or waxes via advanced separation and depolymerization processes. Among them, green solvents in general,

supercritical CO₂, subcritical water, microwave (MW)-assisted acidolysis and gas-expanded liquids have been mentioned [33]. Green solvents offer important separation advantages, including near-supercritical or supercritical fluids, which have outstanding mass transport properties, polarity, and easiness of solvent removal after extracting the compound of interest [34]. Another interesting solvent is water, but the range of compounds that are soluble in this medium is quite limited. Nevertheless, the use of subcritical water has been demonstrated to be advantageous for organic modification to depolymerize, hydrolyze, gasify, and carbonize biomass to produce bioactive compounds, sugars, biogas, and other valuable solids [16, 35].

Integrating two or more green techniques combining different strategies has played an important role in overcoming the main drawbacks of a single technique towards sustainable separation. For instance, for high-pressure solvent extraction in which the extractants do not reach supercritical conditions, the temperature, time, and solvent consumed can be dramatically reduced associating ultrasound-assisted treatment [28, 36]. In fact, more attention has been paid to green extraction, purification, or modification of natural products derived from agro-industrial waste nowadays, opening up new opportunities for sustainable approaches designed for bioeconomy and circular economy models. The aim of this paper is to present an overview of the design and application of green and sustainable separation of natural products for vanguard zero-waste biorefineries. The main analytical techniques and procedures described over the last 10 years will be described in detail, showing the potentialities, challenges, and perspectives in this topical and emergent scenario.

3 High Value-Added Approaches for Green and Sustainable Separation of Natural Products from Waste: What can be Observed from the Literature?

More recently, trends in green and sustainable extraction, fractionation and purification techniques have largely focused on minimizing the use of solvents, energy and materials that are intrinsically benign to human health and the environment [37]. In order to analyze the *status quo* and perspectives related to natural product separation from waste, a systematic literature review was conducted using the ISIS Web of Knowledge platform (reviews and papers) from 2006 to 2017, combining the descriptors “natural product” and “green extraction/separation” (or “sustainable extraction/separation” or “eco-friendly extraction/separation”) and “waste” (or “residue”). Figure 4 shows the number of publications during this period. There were more than 160 research papers and reviews that, to the best of our knowledge, are reasonably representative to show the strongest tendencies in this field over the last decade. It can be clearly observed that there has been an increase in the number of manuscripts over the last 10 years, covering the principles, advances, and applications of these green methods.

The obtained data reflect the growing interest and potential of green and sustainable methods to separate natural products from waste. One tendency observed in particular was the innovative ways to remove (integrating extraction, purification and/or modification in the same integrated system) and use such compounds in more

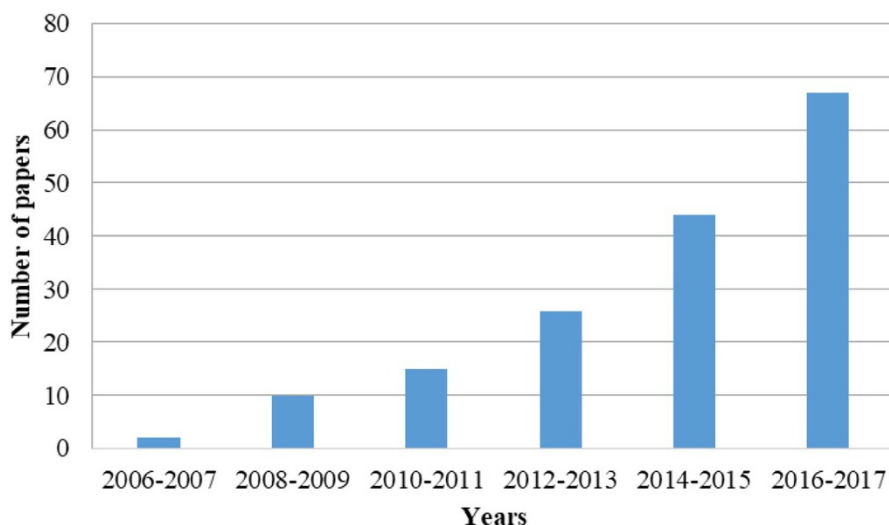


Fig. 4 Number of publications per year focusing on green and sustainable separation (extraction, fractionation and purification) of natural products from waste (ISIS Web of Knowledge, January 2006 to December 2017)

contemporary sectors, promoting human and environmental health instead of general and old-fashioned remediation [19, 38]. As a result, new applications for food, nutraceutical, and agricultural sectors have been further explored, based on their advantageous properties as natural colorants, flavors, aromas, antioxidants, antifungals, bioformulations (bio-pesticides) or simply their use as precursors to generate other compounds for similar uses. Some details related to patents, (non-) clinical trials, sustainable indicators, scaling-up, regulatory, agro-industrial variability and availability, traceability, seasonality, good laboratory and manufacturing practices, additional economical and marketing issues have also been discussed.

Table 1 presents the research papers and reviews published during this period, highlighting their main focus, the green or sustainable techniques/approaches adopted, raw materials (mostly agro-industrial waste) and target compounds studied. The most common raw materials described as chemical feedstocks were waste derived from plants, for instance, food, mainly fruits (citrus, mango, papaya, grape, passiflora, banana, tomato, olive), grains (corn, soybean, sunflower, coffee) and other abundant materials (sugarcane bagasse, tea, wood bark, rice and wheat straw). Additional issues that affect the quality of the final products were also discussed, namely the procedure used for waste collection, selection, storage, drying, matrix characteristics (particle size, shape, specific surface area and porosity). The latter aspects play an important role in extraction efficiency due to the mass and heat transfer processes. Understanding the nature of raw material is crucial to avoid negative influences impacting the quality and yield during the removal of the target compounds, e.g., caused by co-extracted contaminants or due to the presence of some

Table 1 Research papers and reviews focusing on green and sustainable separation of natural products from agro-industrial waste published from January 2006 to December 2017 (ISIS Web of Knowledge)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2017	Olives	Olive kernels	Phenolic compounds and oil	France and Spain	Aqueous liquid solid extraction (LSE), mechanical expression (ME), supercritical CO ₂ (SC-CO ₂) and gas-assisted mechanical expression (GAME)	Gas-assisted mechanical expression (GAME) for the selective recovery of lipophilic and hydrophilic compounds from olive kernel [145]
2017	Figs	Leaves	Bioactive compounds	China	Deep eutectic solvent with microwave and ultrasound extraction Time: 10 min (MW) and 60 min (US) Temperature: 40–80 °C Power: 250 W (MW) and 700 W (US)	Enhanced and green extraction polyphenols and furanocoumarins from Fig (<i>Ficus carica</i> L.) leaves using deep eutectic solvents [136]
2017	<i>Polygonum multiflorum</i>	Herbal raw materials	Stilbene glycoside and anthraquinones	China	Ionic liquids with ultrasonic extractor Time: 1–120 min Power: 40–120 W	Sequential extraction and separation using ionic liquids for stilbene glycoside and anthraquinones in <i>Polygonum multiflorum</i> [131]
2017	Several sources	Not defined	Mostly bioactive compounds	Spain	Review Critical overview about the greenness of water as extraction solvent	Water as green extraction solvent: Principles and reasons for its use [146]
2017	Pomelo	Flavored	Essential oil	China	Microwave irradiation Power: 240–700 W Time: 24 min	A process to preserve valuable compounds and acquire essential oils from pomelo flavedo using a microwave irradiation treatment [52]
2017	<i>Selaginella doederleinii</i>	Not defined	Biflavonoids	China	Ionic liquids and microwave-assisted extraction Power: 300–700 W Time: 30–50 min Temperature: 40–60 °C	Optimization of ionic liquid-assisted extraction of biflavonoids from <i>Selaginella doederleinii</i> and evaluation of its antioxidant and antitumor activity [132]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2017	<i>Pogostemon cablin</i>	Leaves	Essential oils	Indonesia	Microwave-assisted hydrodistillation (MAHD) and solvent-free microwave extraction (SFME) Power: 600 W (MAHD) and 264 W (SFME) Time: 66 min (MAHD) and 45 min (SFME); solvent: water	Comparison of conventional and microwave-assisted distillation of essential oil from <i>Pogostemon cablin</i> leaves; analysis and modeling of heat and mass transfer [147]
2017	<i>Juglans regia</i> L.	Fresh male flowers and unripe walnut seeds	Phenolic content and water-soluble polyphenols	Italy	Microwave-assisted extraction Frequency: 2.45 GHz Max. power: 500 W Solvent: ethanol/water Temperature: 60–100 °C Time: 6–30 min	Process intensification by experimental design application to microwave-assisted extraction of phenolic compounds from <i>Juglans regia</i> L. [148]
2017	Walnuts	Walnut de-pellicle	Flavonoids	China	Macroporous resins Pretreated with 5% HCl and 5% NaOH solutions	Recovery of flavonoids from walnuts de-pellicle wastewater with macroporous resins and evaluation of antioxidant activities in vitro [149]
2017	Ginseng	Roots	Bioactive compounds	Brazil	Sequential extraction system using ethanol followed by water Temperature: 333 K Time: 5–240 min	Techno-economic evaluation of obtaining Brazilian ginseng extracts in potential production scenarios [150]
2017	Food ingredients and natural products	Not defined	Nutraceuticals, cosmetic, pharmaceutical, and bioenergy applications	France	Review current knowledge on ultrasound-assisted extraction	Ultrasound-assisted extraction of food and natural products. Mechanisms, techniques, combinations, protocols and applications. A review [151]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2017	Coffee	Coffee chaff	Antioxidants	Portugal	Solid-liquid extraction and multi-frequency multimode modulated (MMM) Frequency: 19.8 kHz Power: 250 and 500 W Time: 60–600 s	Multi-frequency multimode modulated technology as a clean, fast, and sustainable process to recover antioxidants from a coffee by-product [152]
2017	Apples	Wild apple fruit dust	Bioactive compounds, polyphenolic antioxidants	Serbia	Microwave-assisted extraction Time: 15–35 min Ethanol conc.: 40–80% Irradiation power: 400–800 W	Microwave-assisted extraction of wild apple fruit dust production of polyphenol-rich extracts from filter tea factory by-products [153]
2017	Wood	Wood biomass	Lignin oligomers	China	Microwave-assisted treatment with deep eutectic solvent Solvent: choline chloride and oxalic acid dehydrate Temperature: 80 °C Power: 800 W Time: 3 min	Efficient cleavage of lignin-carbohydrate complexes and ultrafast extraction of lignin oligomers from wood biomass by microwave-assisted treatment with deep eutectic solvent [137]
2017	Wood	Oak wood from cooperative by-products	Furanic compounds, <i>cis</i> - and <i>trans</i> -B-methyl-γ-octalones, terpenes and norisoprenoids, benzenic compounds	Spain	Pressurized liquid extraction Solvent: water, ethanol/water (80:20) and ethyl lactate Temperature: 60–120 °C Pressure: 10.34 MPa Flush volume: 60% Purging time: 80 s	Extraction of natural flavorings with antioxidant capacity from cooperative by-products by green extraction procedure with subcritical fluids [154]
2017	<i>P. armeniaca</i> , <i>P. persica</i> , <i>P. domestica</i> , <i>Triticum aestivum</i>	Fruit and vegetables seeds and peels	Phenolic compounds	Pakistan	Ultrasonic water bath Solvent: 65% (v/v) ethanol (methanol and acetone) Extraction time: 30 min Temperature: 50 °C	Extraction and quantification of phenolic compounds from <i>Prunus armeniaca</i> seed and their role in biotransformation of xenobiotic compounds [71]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2017	Lignocellulose materials	Lignocellulosic biomass such as crops or forestry residues	High value-added bio-based products (e.g., bioethanol, biogas, acetic acid, acetic acid, or activated carbon)	Mexico and Pakistan	Review Focus on transformation based on syngas platform (thermochemical platform) and sugar platform (biochemical platform)	Lignocellulose: a sustainable material to produce value-added products with zero-waste approach [155]
2017	Olives	Olive by-product (paté)	Fatty acids and phenolic compounds	Spain and Italy	Soxhlet extraction (percolation with petroleum ether, under reflux)	Macro and micro functional components of a spreadable olive by-product (paté) generated by new concept of two-phase decanter [156]
2017	Tucumã palm fruit	Tucumã's endocarp	Cellulose	Brazil and USA	Alkaline extraction (135 °C, autoclave, 2 bar, 2 min, 20% of aqueous NaOH, 1:30 straw to liquor (g/ml), 30 min)	New approach for extraction of cellulose from tucumã's endocarp and its structural characterization [115]
2017	Grapes	Seeds	Resveratrol	China	Subcritical water extraction Pressure: 0.5–1.5 MPa Time: 20–30 min Temperature: 130–170 °C	Optimization of subcritical water extraction of resveratrol from grape seeds by response surface methodology [100]
2017	Mango, rambutan, santol	Peels	Antioxidant activity	Thailand	Solid–liquid extraction Ethanol (95%)	Study effect of natural extracts on the antioxidant activity in pork balls [157]
2017	Tomatoes	Pericarps without seeds	Nutrient-rich antioxidant ingredients	Portugal, Spain, Ireland	Microwave extraction (600 rpm, 200 W) Time: 0–20 min Temperature: 60–180 °C Ethanol conc.: 0–100% Solid/liquid ratio: 5–45 g/l	Valorization of tomato wastes for development of nutrient-rich antioxidant ingredients: a sustainable approach towards the needs of today's society [158]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2017	<i>Citrus latifolia</i> , <i>Rubus</i> sp., <i>Origanum vulgare</i> and <i>Heterotheca</i> <i>inuloides</i>	Peel and broken down vegetable material	Fatty acids and antioxidants compounds	Mexico, Belgium	SC-CO ₂ Extraction time: 1 h Flow: 25 g/min Pressure: 10–40 MPa Temperature: 35–60 °C Co-sol.: 0–8 g/min Percent flow: 0–32%	Thermodynamics and statistical correlation between supercritical CO ₂ fluid extraction and bioactivity profile of locally available Mexican plant extracts [159]
2017	Pomegranates	Peels	Carotenoids	Greece	Ultrasound-assisted extraction (139 W, 20 kHz); solvents: vegetable oils Extraction time: 10–60 min Temperature: 20–60 °C	Green ultrasound-assisted extraction of carotenoids from pomegranate wastes using vegetable oils [72]
2017	Pomegranates	Both edible and non-edible parts	Polyphenols	Greece	Semi-automatic extractor Solvents: H ₂ O, β -CD, HP- β -CD Extraction time: 363 min Temperature: 25 °C	Green extraction of polyphenols from whole pomegranate fruit using cyclodextrins [121]
2016	Quince	Leaves	Natural dyes and bioactive compounds	Romania	Aqueous extraction Extraction time: 60–240 min Temperature: 4–100 °C	Dyeing and antibacterial properties of aqueous extracts from quince (<i>Cydonia oblonga</i>) leaves [160]
2016	Corn	Steep liquor	Vanillic acid, <i>p</i> -coumaric acid, ferulic acid, sinapic acid and quercetin	Spain, Portugal, and Italy	Liquid–liquid extraction Solvents: chloroform (56 °C, 60 min) Ethyl acetate (25 °C, 45 min)	A multifunctional extract from corn steep liquor: antioxidant and surfactant activities [161]
2016	Palm	Oil palm empty fruit bunches	Cellulose with polypyrrole as biocomposite material	Malaysia, Pakistan	Ultrasonic treatment (40 kHz) solvent: hydrogen peroxide Extraction time: 1–3 h Room temperature	Autoclave and ultra-sonication treatments of oil palm empty fruit bunch fibers for cellulose extraction and its polypropylene composite properties [73]
2016	Tomatoes	Seeds and peels	Carotenoids/proteins	Tunisia and Germany	Supercritical CO ₂ extraction 80 °C, 400 bar, 4 g CO ₂ /min for 2 h	Biorefinery cascade processing for creating added value on tomato industrial by-products from Tunisia [82]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2016	Black tea	Black tea processing waste	Antioxidant and antimicrobial phenolic compounds	Turkey and USA	Solvent extraction Solvents: H ₂ O, ethanol Extraction time: 2 h Temperature: 70 °C	Black tea processing waste as a source of antioxidant and antimicrobial phenolic compounds [46]
2016	Rapeseed	Rapeseed oil cakes	Protein- and lignin-rich fractions	France	Ultrasonic milling and electrostatic separation Solvents: NaOH, diethylether, hexane Extraction time: 5 h Temperature: 60 °C	Chemical- and solvent-free mechanical fractionation of biomass induced by tribo-electrostatic charging: separation of proteins and lignin [139]
2016	Sunflower	Seeds	Sunflower protein-based ingredients	USA	Review Green pigmentation associated with the interaction of sunflower protein and oxidized chlorogenic acid (CGA) by outlining the sunflower oil and protein meal market, CGA reactions contributing to greening, methods for CGA extraction, and the effect of processing on sunflower protein quality and the greening reaction	Chlorogenic acid oxidation and its reaction with sunflower proteins to form green-colored complexes [162]
2016	Passion fruit	Peels	Pectin	Malaysia	Acidic and enzymatic extraction Citric solution, cellulase Extraction time: 30–120 min Temperature: 35–85 °C	Comparison of acidic and enzymatic pectin extraction from passion fruit peels and its gel properties [107]
2016	Red grape	Pomace	Polyphenols and anthocyanin pigments	Greece	Ultrasound-assisted extraction (140 W, 37 kHz) Solvent: aqueous glycerol Extraction time: 60 min Temperature: 45 °C	Development of a green process for the preparation of antioxidant and pigment-enriched extracts from winery solid wastes using response surface methodology and kinetics [74]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2016	Orange and lemon	Fresh and waste peel	Pectin and D-limonene	Portugal and Italy	Microwave Solvent: water Extraction time: 1 h Temperature: 80 °C	Eco-friendly extraction of pectin and essential oils from orange and lemon peels [53]
2016	Coffee	Spent coffee grounds	Oil	China	Ultrasonication extraction Solvent: hexane Extraction time: 15–75 min	Effect of oil extraction on properties of spent coffee grounds-plastic composites [98]
2016	Tomato	Waste of tomato paste plants	Lycopene	Iran and Canada	Microemulsion technique (MET) Solvents: water, saponin; glycerol, surfactant: lycopene Extraction time: 30 min Temperature: 25 °C	Enhanced lycopene extraction from tomato industrial waste using microemulsion technique: optimization of enzymatic and ultrasound pre-treatments [163]
2016	Red capsicum (<i>Cap-sicum annuum</i>)	Processing residue	Carotenoids	India	Enzymatic liquefaction Pectinase, visczyme L, cellulose extraction Time: 1 h Temperature: 60 °C	Enzyme-assisted extraction of carotenoid-rich extract from red capsicum (<i>Capsicum annuum</i>) [108]
2016	Rice	Husk	Cellulose	India	Eco-friendly method montmorillonite, LiOH, H ₂ O ₂ Extraction time: 6 h Temperature: 80 °C	Extraction of cellulose from agricultural waste using montmorillonite K-10/LiOH and its conversion to renewable energy: biofuel by using <i>Myrothecium gramineum</i> [122]
2016	Tea (yarrow and rose hip)	By-products from filter-tea factory	Chlorophylls and carotenoids	Serbia	Supercritical fluid extraction Extraction time: 5 h Temperature: 40 and 60 °C Pressure: 100–300 bar CO ₂ flow rate: 0.194 hk/h	Extraction of minor compounds (chlorophylls and carotenoids) from yarrow-rose hip mixtures by traditional versus green technique [83]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2016	Corn, sugarcane, sorghum, pearl millet, green gram, groundnut sesame	Bagasse, stover, stalk and shell	<i>Para</i> -coumaric acid (pCA)	India and USA	Alkaline hydrolysis pH 3, alkali conc.: 0.5–4 M Hydrolysis duration: 4–24 h Sugaring-out for separation of pCA from hydrolysate	Extraction of <i>p</i> -coumaric acid from agricultural residues and separation using 'sugaring out' [116]
2016	Winery	Grape wastes and by-products	Antioxidant compounds and polyphenols	Denmark, China, France and Brazil	Review Conventional (solid liquid extraction, heating, grinding, etc.) and non-conventional (pulsed electric fields, high voltage electrical discharges, pulsed ohmic heating, ultrasounds, microwave-assisted extractions, sub- and supercritical fluid extractions, as well as pressurized liquid extraction) methods	Green alternative methods for the extraction of antioxidant bioactive compounds from winery wastes and by-products: a review [164]
2016	1st to 3rd generation biodiesel feedstocks	Mostly microalgae	Biodiesel	Malaysia and Japan	Review Integration of enzymatic reactors with supercritical fluid technology	Green biodiesel production: a review on feedstock, catalyst, monolithic reactor, and supercritical fluid technology [84]
2016	<i>Jatropha curcas</i> , oil palm	Seeds, empty fruit bunch	Bio-oil	Malaysia	Microwave extraction Solvent: water Extraction time: 60–140 min Power: 200–700 W	Green bio-oil extraction for oil crops [54]
2016	Green tea	Green tea residue	Protein	The Netherlands	Alkaline protein extraction Solvent: NaOH Extraction time: 2 h Temperature: 95 °C	Improving yield and composition of protein concentrates from green tea residue in an agri-food supply chain: effect of pre-treatment [117]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2016	Eucalyptus wood	Eucalyptus chips	Hemicelluloses	Uruguay	Green liquor extraction Solvents: water and green liquor (Na_2CO_3 , Na_2S , and NaOH) extraction time: 30–150 min temperature: 100–160 °C	Integrated forest biorefineries: green liquor extraction in eucalyptus wood prior to kraft pulping [123]
2016	Watermelons	Juice	Lycopene	Brazil	Microfiltration, diafiltration, reverse osmosis $\alpha\text{-Al}_2\text{O}_3$ membranes T1-70 (35 °C) Polyamide composite membranes (35 °C, 60 bar)	Integrated membrane separation processes aiming to concentrate and purify lycopene from watermelon juice [140]
2016	Larch wood	Sapwood, heartwood, bark and branches	Phenolic compounds	Slovenia	Pressurized hot water Extraction time: 30 min Temperature: 100 °C	Isolation of phenolic compounds from larch wood waste using pressurized hot water: extraction, analysis and economic evaluation [165]
2016	Tomatoes	Pomace	Lycopene	Iran	Microemulsion technique H_2O and surfactants Extraction time: 30 min Temperature: 35 °C	Microemulsion-based lycopene extraction: effect of surfactants, co-surfactants, and pretreatments [166]
2016	Melons	Rind	Carbohydrates, phenolic compounds, and fatty acids	Spain	Solvent extraction Solvent: cyclohexane, ethanol Extraction time: 2 h Microwave radiation: 190 °C, 20 min, 200 W	Microwave heating for the catalytic conversion of melon rind waste into biofuel precursors [167]
2016	Tomatoes, fungus <i>Blakeslea trispora</i>	Processing waste	Lycopene	Greece	Review Emphasis on final product safety and ecofriendly processing (solvent extraction, SFE, MAE, high-pressure processing, ultrasound, electrical methods)	Natural origin lycopene and its “green” downstream processing [168]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2016	Oranges	Peel	Pectin	Italy	Conventional hydrodistillation, MAE, US Solvents: water Extraction time: 5–155 min Temperature: 90–333 °C	Novel configurations for a citrus waste based biorefinery: from solventless to simultaneous ultrasound and microwave-assisted extraction [55]
2016	Lemons, olives, onion, red grape, coffee, and wheat	Peel, leaves, solid wastes, pomace, spent filter and bran	Polyphenolic compounds	Greece	Ultrasound extraction (140 W, 37 kHz) eutectic mixtures Extraction time: 90 min Temperature: 80 °C	Novel glycerol-based natural eutectic mixtures and their efficiency in the ultrasound-assisted extraction of antioxidant polyphenols from agri-food waste biomass [75]
2016	Potatoes	Peels	Polyphenolic antioxidants	Greece	Ultrasound extraction (140 W, 37 kHz) Solvents: ethanol and glycerol Extraction time: 90 min Extraction temperature: 50–80 °C	Optimization of a green ultrasound-assisted extraction process for potato peel (<i>Solanum tuberosum</i>) polyphenols using bio-solvents and response surface methodology [76]
2016	Grapes	Seeds	Grape seed oil	Croatia	Supercritical CO ₂ Extraction time: 90 min Temperature: 35–64 °C Pressure: 158–441 bar CO ₂ flow rate: 1.94 kg/h	Optimization of supercritical CO ₂ extraction of grape seed oil using response surface methodology [85]
2016	<i>Crocus sativus</i>	Petals (underutilized bulk agro-waste)	Phenolic compounds	Iran	Subcritical water extraction Extraction time: 20–60 min Temperature: 120–160 °C	Optimization of the subcritical water extraction of phenolic antioxidants from <i>Crocus sativus</i> petals of saffron industry residues: Box–Behnken design and principal component analysis [101]
2016	Bananas	Peels	Antioxidants	Malaysia and Turkey	Solvent extraction Solvents: acetone, ethanol, hexane, methanol, H ₂ O Extraction time: 1–5 h	Optimization of extraction parameters on the antioxidant properties of banana waste [47]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2016	Pea vine	Pea vine waste	Potential platform molecules (5-hydroxy furfural; ethanoic acid); sugars (levoglucosenone, rhamnose, xylose, fructose); biopolymer with pectinaceous and starch-like characteristics	United Kingdom	Pseudo-subcritical water extraction Temperature: 125–175 °C Pressure: 20–60 bar Flow rate: 1–5 ml/min	Potential utilization of unavoidable food supply chain wastes-valorization of pea vine wastes [6]
2016	Keratin-containing products stored in large waste deposits	Processing waste	Keratin	Romania	Review Keratins solubilization (protected and unprotected methods) followed by dehydro-thermal, physical-type bonding or chemical treatments	Practical ways of extracting keratin from keratinous wastes and by-products: a review [169]
2016	<i>Taxus baccata</i> L.	Case study based on European yew	10-deacetylbaecatin III (10-DAB)	Germany	Review Theoretical approach in thermodynamics and process modelling as an alternative process design	Process design for integration of extraction, purification and formulation with alternative solvent concepts [170]
2016	Olives	Olive mill waste water	Biophenols (hydroxytyrosol and tyrosol)	Italy	Liquid–liquid extraction Solvents: <i>n</i> -hexane, EtOAc	Quick assessment of the economic value of olive mill waste water [171]
2016	Olives	Olive mill waste water	Tyrosol	Spain, United Kingdom and Spain	Hydrophobic ionic liquids Solvents: ILs Extraction time: 2 h Temperature: 303–323 K	Recovery of tyrosol from aqueous streams using hydrophobic ionic liquids: a first step towards developing sustainable processes for olive mill wastewater (OMW) management [133]
2016	Cupuassu	Seeds	Cupuassu butter (phenolic content/tocopherols/fatty acids)	Brazil	Supercritical CO ₂ extraction Temperature: 50 and 70 °C Pressures: 20–40 MPa	Supercritical CO ₂ extraction of cupuassu butter from defatted seed residue: experimental data, mathematical modeling and cost of manufacturing [86]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2016	Coffee	Spent coffee grounds	Oil fraction	Portugal, Brazil, Portugal	Supercritical CO ₂ Extraction time: 1 h Temperature: 55 °C Pressure: 250 bar Flow rate: 15 kg/h	The green generation of sunscreens: using coffee industrial sub-products [87]
2016	Ginger	Not defined	Essential oil, phenolics, fibers and phenolic acids	France	Microwave hydrodiffusion and gravity processing (MHG) and UAE Solvents: water Extraction time: 83 and 90 min Temperature: up to 100 and 50 °C	Towards a “dry” bio-refinery without solvents or added water using microwaves and ultrasound for total valorization of fruit and vegetable by-products [56]
2016	Passion fruit	Passion fruit seeds and passion fruit seed cake (the residue from the seed oil production by cold pressing)	Oil and extract with promising antioxidant and antimicrobial activities	Brazil and USA	SFE, LPE, MAC, UE Solvents: sCO ₂ , hexane, ethyl acetate, ethanol, H ₂ O Extraction time: 45 min–7 days temperature: room temp.–50 °C	Valorization of passion fruit (<i>Passiflora edulis</i> sp.) by-products: sustainable recovery and biological activities [88]
2016	Wood	Broken pallets, crates, and waste timber from building and demolition works	Renewable energy source	Romania	Review Overview of the technical and economic opportunity of using wood waste as a renewable energy source	Wood waste as a renewable source of energy [172]
2015	Plants of spontaneous flora, cultivated plant, and wastes resulted in agricultural and food industry	General bio-derived materials	Polyphenols	Romania	Review Microwave-assisted extraction (MAE), supercritical fluid extraction (SFE), and ultrasound-assisted extraction (UAE)	A comparative analysis of the ‘green’ techniques applied for polyphenols extraction from bioresources [173]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2015	Onion	Onion solid wastes	Polyphenol- and pigment-enriched extracts with antioxidant activity	Greece	Ultrasound extraction (140 W, 37 kHz) Extraction time: 60 min Temperature: 45 °C	A green ultrasound-assisted extraction process for the recovery of antioxidant polyphenols and pigments from onion solid wastes using Box–Behnken experimental design and kinetics [174]
2015	Six types of plant fibers (bast, leaf, seed, straw, grass, and wood) and animal fibers and regenerated cellulose fibers	Seed (coir) and animals (chicken feather) as they are secondary or made from waste products	Fibers	Sweden	Review Dew, stand, cold and warm water, steam, enzyme, mechanical, ultrasound chemical and Surfactant retting	A review of natural fibers used in biocomposites: plant, animal and regenerated cellulose fibers [175]
2015	Non edible vegetables	Seeds	Biodiesel	Egypt	Review	A review on green trend for oil extraction using subcritical water technology and biodiesel production [102]
2015	Neem	Neem seed cake (NSC)	Neem Protein (NP)	USA	Alkaline extraction Solvents: H ₂ O and NaOH Extraction time: 60 min Temperature: 75 °C	Bio-based polymeric resin from agricultural waste, neem (<i>Azadirachta indica</i>) seed cake, for green composites [118]
2015	Oranges	Peel	Essential oil, polyphenols and pectin	Algeria and France	MHG, UAE, MAE Solvents: “in situ” water Extraction time: 25 and 3 min Temperature: 59 °C	Bio-refinery of orange peels waste: a new concept based on integrated green and solvent free extraction processes using ultrasound and microwave techniques to obtain essential oil, polyphenols and pectin [57]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2015	Corn, sugarcane, sorghum, soybean, rice, barley, potato, other lignocellulose, vegetable oils, oilseed	By-products (bagasse, straw, cobs, stalks, stover, grass etc.)	Biofuel, 1,3-propanediol, succinic acid, adhesives, solvents, surfactants, ethyl lactate, erucic acid, amylase ethers, among others	Denmark	Review Focus on integrating sustainability assessment procedures and tools (LCA and evaluation approaches)	Biorefining in the prevailing energy and materials crisis: a review of sustainable pathways for biorefinery value chains and sustainability assessment methodologies [144]
2015	Agro-industrial products	Agro-industrial co-products	Phenolic compounds	Brazil	Solid-state fermentation, even as friendly enzyme-assisted extractions	Biotransformation and bioconversion of phenolic compounds obtained: an overview [176]
2015	Cashew-nut	Husk	Natural dyes	India	Enzyme-assisted extraction cellulase and pectinase Solvent: water Extraction time: 60–180 min pH 9.5	Cashew-nut husk natural dye extraction using Taguchi optimization: green chemistry approach [109]
2015	Beet	Sugar beet pulp	Monosaccharides present in hydrolyzed SBP pectin: L-rhamnose, L-arabinose, D-galactose and D-galacturonic acid	United Kingdom	Centrifugal partition chromatography ascending mode, 1000 rpm Mobile phase flow rate: 8 ml/min	Centrifugal partition chromatography in a biorefinery context: separation of monosaccharides from hydrolyzed sugar beet pulp [141]
2015	Mangoes (<i>Mangifera indica</i> L.) and rye grains (<i>Secale cereals</i> L.)	Peels and grains	Alk(en)ylresorcinols (ARs)	Germany	Ultrasound-assisted extraction Solvent: dichloromethane Extraction time: 15 s cooled in ice bath	Development and validation of an HPLC method for the determination of alk(en)ylresorcinols using rapid ultrasound-assisted extraction of mango peels and rye grains [78]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2015	Olives	Waste from olive oil production	High-added value compounds (polyphenols, fatty acids, coloring pigments (chlorophylls and carotenoids), tocopherols, phytosterols, squalene, volatile and aromatic compounds)	Spain, France, Morocco and Portugal	Review Conventional (solvent, heat, grinding) and non-conventional methodologies (ultrasounds, microwaves, sub- and supercritical fluid extractions, pressurized liquid extraction, pulsed electric fields and high voltage electrical discharges)	Emerging opportunities for the effective valorization of wastes and by-products generated during olive oil production process: non-conventional methods for the recovery of high-added value compounds [142]
2015	Asparagus	Dried segments (residues)	Antioxidant compounds	China	Solid-liquid extraction Solvents: acetone, methanol or ethanol Extraction time: 2 h Temperature: 70 °C	Extraction and analysis of antioxidant compounds from the residues of <i>Asparagus officinalis</i> L. [177]
2015	Grapes	Skin	Anthocyanins	Korea	Deep eutectic solvents (DESS) Extraction time: 45 min room temperature	Highly efficient extraction of anthocyanins from grape skin using deep eutectic solvents as green and tunable media [138]
2015	Green tea	Green tea leaf residue	HG pectin, RGII pectin, organic acids, cellulose and hemi-cellulose	The Netherlands	Alkaline extraction Solvents: 0.1 M NaOH Extraction time: 2 h (protein), 5 min–24 h (carbohydrates or lignin) Temperature: 95 °C	How does alkali aid protein extraction in green tea leaf residue: a basis for integrated biorefinery of leaves [119]
2015	Papaya (<i>Carica papaya</i> L.)	Processing waste	Lycopene	China	Ultrasound extraction (600 W, 40 kHz) Solvents: ethanol/ethyl acetate Extraction time: 15–40 min Temperature: 20–70 °C	Optimization of ultrasound-assisted extraction of lycopene from papaya processing waste by response surface methodology [77]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2015	Carrots, green beans, leeks and celeriac	Vegetable waste streams (rejected carrots, carrot steam peels, green beans cutting waste, leek cutting waste and celeriac steam peels)	Pectin	Belgium	Alcohol insoluble residue Solvents: ethanol and acetone	Pectin characterization in vegetable waste streams: a starting point for waste valorization in the food industry [178]
2015	Berries of <i>A. mel-anocarpa</i>	Black chokeberry wastes	Antioxidants	France	Extraction-adsorption process Extraction time: 2–8 h Temperature: 22 °C	Pilot scale demonstration of integrated extraction-adsorption eco-process for selective recovery of antioxidants from berries wastes [179]
2015	Cashew nuts (CNS)	Shells	Anacardic acid	Tanzania	Review Focus on natural anacardic acids from CNS and other plants and their semi-synthetic derivatives as possible lead compounds in medicine	Potential biological applications of bio-based anacardic acids and their derivatives [180]
2015	Soy, sugarcane, tea	Soy sauce residues, sugarcane bagasse and tea dregs	Hemicelluloses	China	Ionic liquid Solvents: ionic liquids Extraction time: 1–5 h Temperature: 70–100 °C	Quantitative industrial analysis of lignocellulosic composition in typical agro-residues and extraction of inner hemicelluloses with ionic liquid [134]
2015	Tomatoes	Processing tomato	Nutritional bioactive compounds, lycopene	Italy	Biocompatible technology extraction	Recovery of tomato bioactive compounds through a biocompatible and eco-sustainable new technology for the production of enriched “nutraceutical tomato products” [181]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2015	<i>Citrus sinensis</i> (Hamlin, Valencia, Pera riu and Pera Natal)	Albedo and flavedo	Flavanone	Brazil	Enzymatic process tannase, pectinase and cellulase Extraction time: 30 h Temperature: 40 °C pH 5	Simultaneous extraction and biotransformation process to obtain high bioactivity phenolic compounds from Brazilian citrus residues [110]
2015	Sunflower	Seeds	Oil- (fatty acids and their antioxidant capacities) and water-soluble phase (proteins, carbohydrates and phenolics)	Slovenia	Subcritical water extraction Extraction time: 5–120 min Temperature: 60–160 °C Pressure: 30 bar	Simultaneous extraction of oil- and water-soluble phase from sunflower seeds with subcritical water [103]
2015	Cereals, root crops, fruits, vegetables, oilseeds, meat, dairy products	Food waste	Nutritionally interesting compounds, chemicals and biofuels	Brazil	Review Sub- and supercritical technologies	Sub- and supercritical fluid technology applied to food waste processing [89]
2015	Agricultural biomass	By-products such as durian peel, mango peel, corn straw, rice bran, corn shell and potato peel	Bio-fuel, water soluble sugars and phenolic compounds	Malaysia and Nigeria	Review Sub-critical water	Sub-critical water as a green solvent for production of valuable materials from agricultural waste biomass: a review of recent work [182]
2015	Sugarcane	Sugarcane waste (rind, leaf and bagasse)	Wax/long-chain aldehydes and <i>n</i> -policosanols (nutraceutical compounds) triterpenoids	UK and Brazil	Supercritical CO ₂ (scCO ₂) Extraction time: 4 h Temperature: 50 °C Pressure: 350 bar Flow rate: 40 g/min	Sugarcane waste as a valuable source of lipophilic molecules [183]
2015	Mangoes	Peel	Pectin	Germany and Saudi Arabia	Hot-acid extraction Extraction time: 90 min pH 1.5	The arabinogalactan of dried mango exudate and its co-extraction during pectin recovery from mango peel [184]
2015	Coffee	Spent coffee grounds	Tannin compounds	Malaysia	Alkaline extraction Solvent: NaOH Extraction time: 30–90 min Temperature: 60–100 °C	The influence of extraction parameters on spent coffee grounds as a renewable tannin resource [185]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2014	<i>Eucalyptus globulus</i> wood	Trimmings of <i>Eucalyptus globulus</i> wood veneers	Phenolic compounds	Spain	Aqueous two-phase extraction PEG 2000 and ammonium sulphate Extraction time: 30–390 min Temperature: 25–65 °C	Aqueous two-phase systems for the extraction of phenolic compounds from <i>eucalyptus</i> (<i>Eucalyptus globulus</i>) wood industrial wastes [124]
2014	Pomegranates	By-products after winemaking of pomegranate	(poly)phenolic compounds	Spain, Mexico and Italy	Extraction with MeOH 70% (v/v) and sonication	Assessment of pomegranate wine lees as a valuable source for the recovery of (poly)phenolic compounds [186]
2014	Citrus	Peel, pulp and seeds	Several value-added products, such as essential oils, pectin, enzymes, single cell protein, natural antioxidants, ethanol, organic acids, and prebiotics	Greece and Sweden	Review	Biotransformation of citrus by-products into value added products [187]
2014	Olives	Olive solid waste	Natural dye	Tunisia	Aqueous extraction in closed flasks Solvent: NaOH Extraction time: 15–120 min Temperature: 30–90 °C	Development and optimisation of a non-conventional extraction process of natural dye from olive solid waste using response surface methodology (RSM) [125]
2014	Coffee	Waste coffee grounds	Biodiesel production	United Kingdom	Suspended in fresh heptane room temperature	Effect of the type of bean, processing, and geographical location on the biodiesel produced from waste coffee grounds [188]
2014	Grapevine and hazelnut	Grapevine waste and hazelnut skins	Polyphenols content	Italy and France	UAE and MAE Solvents: ethanol, methanol, acetone, butanone, β -cyclodextrin Extraction time: 5–40 min Temperature: 20–60 °C	Efficient green extraction of polyphenols from post-harvested agro-industry vegetal sources in Piedmont [58]
2014	Bamboo	Raw bamboo culm	Lignin	Malaysia	Review Chemical and steam explosion methods	Extraction and preparation of bamboo fibre-reinforced composites [189]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2014	Spruce	Spruce sawdust	Carboxylic acids	Finland	Alkaline extraction Solvents: Na_2CO_3 or $\text{Na}_2\text{S}_2\text{O}_8$ Extraction time: 30 min + 30 min; Temperature: 80 °C up to 160 °C and 210 °C	Production of carboxylic acids from alkaline pretreatment byproduct of softwood [120]
2014	Variety of biomass sources (rapeseed, soybean, palm oil and nonedible feedstocks)	Preferably 2nd–4th generation feedstock (non-edible materials as bagasse, oil waste, microalgae, cyanobacteria and microbes)	Biodiesel	Malaysia	Review Supercritical fluid process and catalytic in situ or reactive extraction process	Integration of reactive extraction with supercritical fluids for process intensification of biodiesel production: prospects and recent advances [90]
2014	Cherries	Cherry seeds	Total phenolic content	Brazil and France	Pressurized fluid extraction (PFE) Solvent: anhydrous ethanol Extraction time: 2–10 min Temperature: 40–80 °C	Isolation by pressurized fluid extraction (PFE) and identification using CPC and HPLC/ESI/MS of phenolic compounds from Brazilian cherry seeds (<i>Eugenia uniflora</i> L.) [190]
2014	Corn	Corn stover	Lignin	USA	Protic ionic liquid (PIL) Extraction time: 24 h Temperature: 90 °C	Lignin extraction from biomass with protic ionic liquids [135]
2014	Oranges	Peel	D-limonene	United Kingdom	Microwave-assisted extraction 200 W, closed vessel Solvent: hexane Temperature: 70–110 °C	Microwave-assisted extraction as an important technology for valorising orange waste [59]
2014	Sweet Limes	Peel	Antioxidant phenolics	Pakistan	Enzymatic treatment Incubation time: 30–120 min Temperature: 30–75 °C pH 5 to 8	Optimization of enzyme-assisted revalorization of sweet lime (<i>Citrus limetta</i> Risso) peel into phenolic antioxidants [111]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2014	Artichoke	Artichoke scraps	Phenolic compounds	Italy	Ultrasound-assisted extraction (UAE) Time: 60 min Solvent: water	Phenols and antioxidant activity in vitro and in vivo of aqueous extracts obtained by ultrasound-assisted extraction from artichoke by-products [79]
2014	<i>Cachrys pungens</i> Jan (Umbelliferae)	Aerial parts of <i>Cachrys pungens</i> Jan (Umbelliferae)	Bioactive compounds	Italy	Solvent extraction Solvents: methanol Extraction time: 72 h room temperature dark conditions	Phytotoxic activity of <i>Cachrys pungens</i> Jan, a Mediterranean species: separation, identification and quantification of potential allelochemicals [191]
2014	Wheat	Wheat straw	Major organic components (e.g., <i>N</i> -heterocycles, fatty acids, phenols and lignins)	Canada	Fast pyrolysis steel shots 475 °C	Wheat straw biomass: a resource for high-value chemicals [192]
2013	Cranberries	Cranberry juice and pomace	Polyphenolics	Canada and Mexico	Pilot scale methods Solvents: ethanol Extraction time: 24 h	Bioactivities of pilot-scale extracted cranberry juice and pomace [48]
2013	Fruits, vegetables, eggs, shrimp	Plant residues, industrial and post-harvest materials	Carotenoids	Mexico	Review Novel environmentally friendly solvents (e.g., ethyl lactate, bioethanol, vegetal oil, commercial enzymes)	Carotenoids extraction and quantification: a review [193]
2013	Tomatoes	Peels	Lycopene	Italy	Enzymatic-assisted extraction Temperature: 45 and 60 °C pH 4–5 and 9–10.5	Environmentally friendly lycopene purification from tomato peel waste: enzymatic-assisted aqueous extraction [112]
2013	Coffee	Coffee residue left after the preparation of the brew (spent coffee grounds—SCG)	Polysaccharides	Portugal	Alkali extraction Solvent: H ₂ O and 4 M NaOH Extraction time: 3 h Temperature: 20–120 °C	Extractability and structure of spent coffee ground polysaccharides by roasting pre-treatments [194]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2013	Coffee	Spent coffee grounds	Lipids, oil	Iran	Soxhlet, UAE, MAE, SFE Solvents: petroleum benzene and <i>n</i> -hexane Soxhlet: 6 h, boiling temperature UAE: 45 min, ambient conditions MAE: 30 s, 200 and 800 W SFE: 200–250 bar, 40–60 °C, modifier (water, ethanol, hexane)	Extraction of lipids from spent coffee grounds using organic solvents and supercritical carbon dioxide [60]
2013	Forest Industry	Forest residues, including bark	Bioactive molecules	Canada	Review Green alternatives for the design, formulation, and manufacture of new products with applications in various markets (cosmetics, natural health products, biocides, adhesives, coatings)	Forest extracts, the 4th pathway of the forest biorefinery concept [195]
2013	Coffee	Spent coffee grounds (SCG)	Lipid fraction	Portugal and Brazil	Supercritical carbon dioxide Extraction time: 1 h Temperature: 55 °C Pressure: 250 bar CO ₂ flow rate: 15 kg/h	From coffee industry waste materials to skin-friendly products with improved skin fat levels [91]
2013	Walnuts	Green husk	Natural compounds with antioxidant and antimicrobial properties	Spain and Portugal	Solvent extraction Solvents: water, methanol, ethanol Extraction time: 45 min room temperature	Influence of solvent on the antioxidant and antimicrobial properties of walnut (<i>Juglans regia</i> L.) green husk extracts [49]
2013	Coffee	Spent coffee	Antioxidants	Spain	Soxhlet, SPE, filter coffeemaker Solvents: water, ethanol, methanol Extraction time: 6–165 min Temperature: 80–100 °C	Influence of extraction process on antioxidant capacity of spent coffee [50]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2013	Tomatoes	Peel	Fatty acids	France	Depolymerization 1.5 M KOMe overnight treatment at room temperature	Interfacial properties of functionalized assemblies of hydroxy-fatty acid salts isolated from fruit tomato peels [196]
2013	Coffee	Spent coffee grounds (SCG)	Polysaccharides	Portugal	Microwave superheated water extraction Extraction time: 5 min Temperature: 200 °C	Microwave superheated water extraction of polysaccharides from spent coffee grounds [61]
2013	Turkish red pine timber	Waste barks	Natural dye	Turkey	Natural dyestuff extraction machine Solvents: water and ethanol Extraction time: 24 h (osmosis)	Natural dye extraction from waste barks of Turkish red pine (<i>Pinus brutia</i> Ten.) Timber and eco-friendly natural dyeing of various textile fibers [126]
2013	Cotton, jute, flax, hemp, ramie and natural colorants	Wastes and manufacturing by-products	Fibres, polysaccharides, dyes and pigments, polyphenols, oils and other biologically active compounds	India	Review Conventional maceration, soxhlet, MAE, SFE, ultrasonic extraction	Perspectives for natural product based agents derived from industrial plants in textile applications: a review [197]
2013	Coffee	Spent coffee grounds	Natural antioxidants	Italy	Solvent extraction Solvents: H ₂ O, ethanol, Extraction time: 30 min Temperature: 60 °C	Recovery of natural antioxidants from spent coffee grounds [198]
2013	Feijoa fruits	Primarily skin and some flesh	Total soluble solids (TSS), pectin fibre content, total extractable PP content (TEPC) and total antioxidant activity	New Zealand	Accelerated solvent extraction Solvents: (acidified) water, ethanol Temperature: 20 or 50 °C	Utilisation potential of feijoa fruit wastes as ingredients for functional foods [127]
2012	Green tea	Green tea waste	Noncaffeine tea polyphenols	China	Water bath 20 min 90 °C	A novel way of separation and preparation non-caffeine tea polyphenols from green tea waste [199]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2012	Larch	Larch wood-derived lignocellulosic residue	Arabinogalactan, pectin, and crystalline glucose	Russia	Water extraction Extraction time: 2–3 h Temperature: 60–80 °C	An eco-friendly technology for polysaccharide production from logging and sawing waste [128]
2012	Olives	Olive leaves	Oleuropein	Greece	SFE and PLE SFE: 30 MPa, 50 °C, 9.6 kg/h PLE: 10.34 MPa, 10 min, 40–150 °C Solvents: H ₂ O and EtOH	Development of a green extraction procedure with super/subcritical fluids to produce extracts enriched in oleuropein from olive leaves [92]
2012	Wood	Wood barks, obtained from pulp mills as industrial wastes	Natural phenolic polymers of tannins and lignin	France	Aqueous extraction urea and sulfite used as water-additives Extraction time: 1 h under reflux Temperature: 75 °C	Development of green adhesives for fibboard manufacturing, using tannins and lignin from pulp mill residues [129]
2012	Wheat	Wheat milling by-products	High quality oil and vitamin E	Italy	Review Solvent extraction, mechanical pressing or the eco-friendly supercritical carbon dioxide (SC-CO ₂) extraction technology	Durum wheat by-products as natural sources of valuable nutrients [200]
2012	Tree bark	Waste product from paper pulp industries	Antioxidants	Sweden	SFE, PFE, SLE Solvents: scCO ₂ , ethanol, H ₂ O Extraction time: 30 min–24 h Temperature: 70–180 °C	Extraction of antioxidants from spruce (<i>Picea abies</i>) bark using eco-friendly solvents [93]
2012	Timber	Empty fruit bunches	Fiber	Malaysia	Perspective paper	Fiber resin matrix composites: nature's gift [201]
2012	Oranges	Peel	Essential oil	United Kingdom	Steam distillation and microwave irradiation SD: water, 1 h MW: 12.5 min, 200 °C, power gradient from 400 to 1200 W	<i>p</i> -cymenesulphonic acid: an organic acid synthesized from citrus waste [202]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2012	Black tea	Black tea wastes	Pancreatic lipase-inhibiting polyphenols	Japan	Hot-compressed water (HCW) ion-exchange water extraction temperature: 100–200 °C	Polyphenols extracted from black tea (<i>Camellia sinensis</i>) residue by hot-compressed water and their inhibitory effect on pancreatic lipase in vitro [203]
2012	Green tea	Green tea waste	Polyphenols	China	Liquid–liquid extraction Solvents: H ₂ O, glyceryl, triacetate, <i>n</i> -butanol, ethyl acetate Extraction time: 12 h + 2 h	Recovery of tea polyphenols from green tea waste by liquid–liquid extraction [204]
2012	Citrus	Peels	Polymethoxy flavonoids	China	Solvent extraction Solvents: methanol and ethanol Extraction time: 1–3 h Temperature: 65–85 °C	Study on the extraction technique of poly-methoxyflavonoids from citrus peels by using response surface methodology [205]
2011	Coffee	Husks	Caffeine	Spain	Supercritical CO ₂ Extraction time: 20 min Temperature: 323 K Pressure: 60 bar CO ₂ flow rate: 2–3 g/min	Extraction of caffeine from Robusta coffee (<i>Coffea canephora</i> var. Robusta) husks using supercritical carbon dioxide [94]
2011	Oranges	Peel	Essential oils	France and Tunisia	Microwave steam diffusion (MSDf) Extraction time: 12 min Temperature: 100 °C	Microwave steam diffusion for extraction of essential oil from orange peel: kinetic data, extract's global yield and mechanism [62]
2011	Grape	Skins	Anthocyanins	Spain	Microwave-assisted extraction Solvents: H ₂ O, methanol Extraction time: 5–20 min Temperature: 50–100 °C	Microwave-assisted extraction of anthocyanins from grape skins [63]
2011	Tea (green, oolong and black)	Tea residues (green, oolong and black tea residues)	Phenolic compounds	Japan	Microwave-assisted extraction water under autohydrolytic conditions Extraction time: 2 min Temperature: 110–230 °C	Microwave-assisted extraction of phenolic compounds from tea residues under autohydrolytic conditions [64]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2011	Sea Buckthorn (Hippophae rhamnoides)	By-Products of juice production	Flavonoids	France	Solvent-free microwave hydrodiffusion and gravity (MHG) without addition of solvent or water atmospheric pressure	Solvent free microwave-assisted extraction of antioxidants from sea buckthorn (<i>Hippophae rhamnoides</i>) food by-products [206]
2011	Wheat	Wheat straw	Energy and CO ₂ secondary metabolites including fatty acids, wax esters and fatty alcohols	England	Supercritical CO ₂ extraction Temperature: 40–100 °C Pressure: 100–300 bar CO ₂ flow rate: 40 g/min	Use of green chemical technologies in an integrated biorefinery [95]
2011	Olives	By-products generated during storage of extra virgin olive oil	Phenolic compounds, hydroxytyrosol, tyrosol, decarboxymethyl oleuropein aglycone, and luteolin	Italy and Spain	Solid-liquid and liquid-liquid extraction Solvents: n-hexane, methanol, H ₂ O Extraction time: 1 h	Wastes generated during the storage of extra virgin olive oil as a natural source of phenolic compounds [207]
2010	Tomatoes	Ground tomatoes without seeds	Lycopene	France and Algeria	Solvent extraction Solvent: D-limonene	Carotenoid extraction from tomato using a green solvent resulting from orange processing waste [208]
2010	Tea plant	Tea stalk and fiber wastes	Caffeine	Turkey	Supercritical CO ₂ ethanol as co-solvent Extraction time: 1–5 h Temperature: 50–70 °C Pressure: 250 bar semi-continuous flow	Effect of ethanol content on supercritical carbon dioxide extraction of caffeine from tea stalk and fiber wastes [96]
2010	Portuguese elderberry	Pomace	Anthocyanins	Portugal	Supercritical CO ₂ extraction Solvents: CO ₂ , water, ethanol Extraction time: 40 min Temperature: 313 K	Effect of solvent (CO ₂ /ethanol/H ₂ O) on the fractionated enhanced solvent extraction of anthocyanins from elderberry pomace [97]
2010	Green tea	Green tea waste	Polyphenols, total catechins, and reducing sugars	South Korea and USA	Solvents: cold water (25 °C), hot water (90 °C), sulfuric acid, hydrochloric acid and methanol Extraction time: 20 min 250 rpm	Effects of cellulase from <i>Aspergillus niger</i> and solvent pretreatments on the extractability of organic green tea waste [130]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2010	Tea	Tea waste	Caffeine	Iran	Subcritical water extraction Temperature: 100–200 °C Pressure: 20–40 bar water flow rate: 1–4 g/min	Isolation of caffeine from tea waste using subcritical water extraction [104]
2010	<i>Citrus sudachi</i>	Peels	Flavones	Japan	Microwave-assisted extraction Solvents: methanol extraction time: 10 to 12 min	Microwave-assisted extraction and methylation of useful flavones from waste peels of <i>Citrus sudachi</i> [209]
2010	Mate (<i>Ilex paraguayensis</i>)	Mate residue	Compounds with anti-oxidant properties, such as phenolic acids and methylxanthines, such as caffeine	Brazil	Solvent extraction Solvent: methanol, H ₂ O, ethanol sonication for 15 min room temperature	Phenolic acids and methylxanthines composition and antioxidant properties of mate (<i>Ilex paraguayensis</i>) residue [210]
2010	Rice	Rice bran	Phenolic compounds as well as other valuable materials	Japan	Subcritical water Preheated oil: 100–180 °C, 10 min Preheated water bath: 180–360 °C, 10 min and 220 °C for 2–30 min	Production of phenolic compounds from rice bran biomass under subcritical water conditions [105]
2009	<i>Citrus</i>	Peels	Essential oil	France and Algeria	Microwave hydrodiffusion gravity Extraction time: 15 min atmospheric pressure 500 W	A new process for extraction of essential oil from citrus peels: microwave hydrodiffusion and gravity [65]
2009	Kiwifruit	By-products derived from kiwifruit processing	Phenolics and pectin polysaccharides	New Zealand	Solvent extraction Solvents: water, ethanol Extraction time: 1 h room temperature	Evaluation of the extraction efficiency for polyphenol extracts from by-products of green kiwifruit juicing [211]
2009	Palm	Black liquor of oil palm waste	Lignin	Malaysia	Solvent extraction Chemical extractions: di-ethyl ether, alcohol-benzene mixture treatment with H ₂ SO ₄ for 30–45 min	Exploring the antioxidant potential of lignin isolated from black liquor of oil palm waste [212]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2009	Turkish tea plants	Tea stalk and fiber wastes	Caffeine	Turkey	Supercritical carbon dioxide Extraction time: 1–10 h Temperature: 55–75 °C increasing pressure up to 250 bar semi-continuous flow	Extraction of caffeine from tea stalk and fiber wastes using supercritical carbon dioxide [99]
2009	Rice	Rice bran	Oil (value-added materials such as amino acids, organic acids, and water-soluble saccharides)	Japan	Subcritical water preheated oil bath: 100–180 °C Preheated salt bath: 200–360 °C Reaction time: 5 min	Sub-critical water treatment of rice bran to produce valuable materials [106]
2009	Several biomass	Residues rich in ligno-celluloses	Bio-based chemicals (e.g., succinic, lactic, fumaric, L-malic, L-aspartic acids)	England	Review Focus on green chemical conversion of lignin into higher value chemicals	The integration of green chemistry into future biorefineries [21]
2009	Apple	Industrially generated apple pomace	Antioxidants and polyphenols	Ireland	Pressurized liquid extraction accelerated solvent extractor static extraction of 5 min Temperature: 75–193 °C	The optimization of extraction of antioxidants from apple pomace by pressurized liquids [213]
2008	Chicory, citrus, cauliflower, endive, and sugar beet	Plant by-products (chicory roots, citrus peel, cauliflower florets and leaves, endive, and sugar beet pulps)	Pectins	France and Finland	Enzymatic extraction Extraction time: 4 h Temperature: 50 °C	Extraction of green labeled pectins and pectic oligosaccharides from plant by-products [113]
2008	Tea (green, oolong, and black)	Green, oolong, and black tea residues	Polysaccharides, polyphenols, arabinose, galactose, xylose, catechins	Japan	Microwave heating Solvent: water Temperature: 110–230 °C	Microwave heating of tea residue yields polysaccharides, polyphenols, and plant biopolyester [66]
2008	Plant lipids	Plant oils and other natural lipidic phases	Phytosterols, vitamins	Czech Republic	Review Enzymes as efficient natural catalysts	Plant products for pharmacology: application of enzymes in their transformations [114]

Table 1 (continued)

Year	Crop	Waste stream	Target compounds	Geographical location	Green or sustainable separation approach	References
2007	Broccoli	Broccoli seeds	Natural sulforaphane	China and Australia	Liquid–liquid and solid-phase extraction Solvents: ethanol, hexane, ethyl acetate	Separation and purification of sulforaphane from broccoli seeds by solid phase extraction and preparative high-performance liquid chromatography [214]
2006	Tea	Tea waste	Caffeine	Turkey	Solid–liquid extraction solvents: hot water and chloroform Temperature: 370 K and 293 K	Solid–liquid extraction of caffeine from tea waste using battery type extractor; process optimization [215]

components in these matrices, such as water or high molecular weight compounds [39].

The decision concerning the best method to separate the compounds of interest from the raw material is dependent on several aspects, such as the characteristics of the target extracts and raw material (physical–chemical properties), available technology, required purity, selectivity, stability and, more importantly here, the greenness of the whole process. As can be seen in Fig. 5, the most cited techniques in these research papers were based on solvent/maceration (25% of the total), microwave (19%), ultrasonication (14.7%) and supercritical fluid processing (13%), followed by methods using ionic liquids (7%), enzymatic and subcritical fluid treatment (6%), as well as the association of two or more techniques.

According to the literature, the most widespread approaches for separating natural products from a number of matrices are based on liquid–liquid or solid–liquid extraction (LLE and SLE). Several greener alternatives have been proposed by replacing toxic or non-renewable organic solvents, as well as the extraction times. In some cases, solid-phase extractions (SPE) were also carried out and decreased both the amount of solvent and the number of extraction cycles, offering high enrichment factors [39, 40]. Actually, the mass transfer enhancement for SLE has been largely studied and applied, contributing to technology innovation, process intensification and integration, and energy saving, especially important for microwave, ultrasound, and high-pressure processing, for instance [41]. An overview of these techniques and related examples will be discussed in this section.

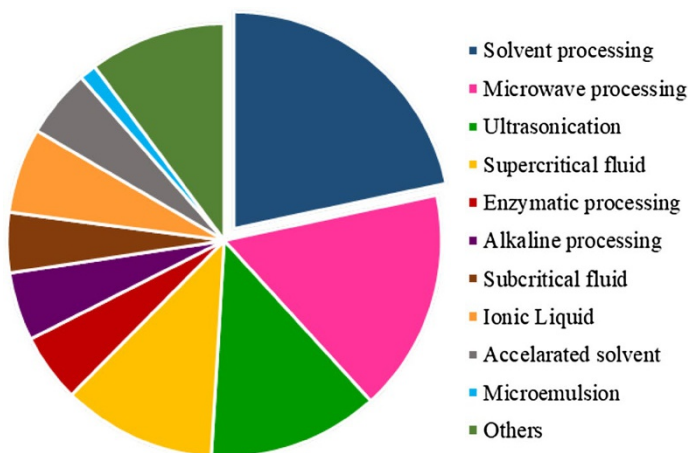


Fig. 5 Main green and sustainable techniques used to separate natural products from waste described in research papers (ISIS Web of Knowledge, January 2006 to December 2017)

3.1 From Conventional Solvent Separation to Enhancement Processing Approaches Over the Last 10 Years

Solvent processing is one of the most traditional methods to remove natural products from bio-derived materials. In this extraction approach, the raw material in adequate size is exposed to different solvents, mostly organic, which remove soluble components of interest. The samples are then usually centrifuged and filtered to separate the solid residue, and the extract is used in this way (as a food supplement or for preparing functional foods, for example) or treated after this step. Solvent extraction is attractive compared to other methods due to low cost and simplicity. However, this method does not always use benign solvents; it frequently requires an evaporation/concentration step for recovery, it usually demands large amounts of solvent and needs a long time to be carried out. Additionally, the possibility of thermal degradation of natural bioactive components is also possible due to the high temperatures used during the extraction process [42]. Despite this, it is largely used in industries, where solvent reuse is of great economic importance. In general, the raw material (in its liquid or solid form) is mixed with a solvent, and the separation kinetic of the target compounds is influenced by parameters such as the solvent ratio, pH, and temperature and, for SLE, the particle size. The solvent should be atoxic, non-flammable and stable at working conditions, ideally renewable and cheap, with low viscosity and an adequate boiling point, allowing for easier solvent removal from the extract/fraction [43]. Recently, several models have been proposed to predict the best solvents to be used in a specific case, which do not only take into account physical descriptors, such as enthalpy of vaporization, dielectric constant, refractive index, boiling point, etc., but also empirical descriptors to evaluate, for instance, intermolecular forces (specific and non-specific solute–solvent interactions, e.g., hydrogen bond donor and/or hydrogen bond acceptor, Van der Waals and ion/dipole forces). Purely theoretical descriptors have been also introduced, offering the most important advantage of not requiring any experiments, as is the case of the model known as quantitative structure property relationship (QSPR), able to predict 127 polarity scales for more than 700 solvents [44].

The solvent selection also depends on the physical–chemical proprieties of the compounds of interest, considering principally the selectivity and greenness degree of the process, aiming at obtaining high recoveries and the integrity of the target compounds. In general, the raw material stays in contact with the solvent for a certain period (from minutes to days), when the soluble compounds are transferred from the matrix to the extractor phase, usually by shaking the system. For SLE, the dispersion of the particles in the solvent is facilitated agitating them, optimizing their contact and accelerating the separation process. Traditionally, solvent treatment is performed at room temperature, although heating can promote higher recoveries to these compounds that are not thermosensitive. In some cases, LLE and SLE can be time-consuming, demanding further purification and concentration steps, which are their main drawbacks [41, 45].

Maceration using green and non-toxic solvents for the separation of natural products from plant-derived waste has been described over the last years (e.g., to remove dyes from quince leaves or catechins, theaflavins, gallic acid, and antioxidants in

general from walnut green husk, cranberry pomace, black tea and banana processing waste). According to these studies, using water, methanol, ethanol or a mixture of them at 70–100 °C can be a low-cost, benign alternative for the recovery of high added-value compounds derived from residual biomass [46–49]. Scaling-up was also studied, whose results showed to be useful in determining industrial process feasibility and the economic value of polyphenols for commercial use, increasing the overall profitability of the cranberry industry [48].

Whenever possible, higher temperatures allow for higher mass transfer in a shorter time with lower energy consumption in general, resulting in better recovery efficiency than conventional systems [50]. As observed in Fig. 5, the second most cited green and sustainable separation process is based on microwave heating and can be considered a non-conventional technique nowadays. Heating is based on non-ionizing electromagnetic waves. Those between 0.915 and 2.45 GHz are used for industrial, scientific and medical applications. The overall principle of heating is rooted in its direct impact with polar materials/solvents and is dependent on ionic conduction and dipole rotation, occurring simultaneously in most cases. The increased temperature can overcome the natural product-matrix interaction caused by Van der Waals forces, dipole attraction, hydrogen bonding of the compounds of interest and active sites in the matrix. Therefore, thermal energy can disrupt both solute–solute and solute–matrix interactions, providing the activation energy required for the desorption process. The mass transfer of the compounds from the raw material to the solvent is also accomplished by convection and diffusion mechanisms, causing the explosion of plant cells and releasing their content into the liquid phase [51].

The eco-friendly removal of essential oils, pectin and polyphenols from a number of plant raw materials mediated by microwave irradiation has been described over the last years, paying special attention to citrus waste [52–66]. In fact, the orange juice processing industry can be considered more than a good case study. This sector is highly wasteful, generating 50% of waste from the total fruit/starting material (e.g., peel, bagasse, seeds and yellow water). Around 20 million tonnes of orange peel per year are produced worldwide, which consist of water (80%) and sugars, cellulose, hemicellulose, pectin and D-limonene (20%). Recently, it was shown using a mathematical model that D-limonene extraction consisted of a two stage diffusion process for a microwave (MW) heating approach: initial extraction from the exterior of cells followed by trans-membrane diffusion. Compared to other conventional extraction methods, it was found that the microwave treatment was more efficient, resulting in a higher overall yield due to the access to a higher amount of D-limonene [59].

The successful microwave-assisted solvent-free modification of pectin derived from citrus waste has also been reported [53]. These approaches not only allow for the separation of the major components of citrus peel, but they also add further value through the production of other high value-added products, such as pectin, D-limonene and a rare form of mesoporous cellulose which are produced in a single step, without added acid [67]. Along these lines, the concept of dry-biorefinery is gaining momentum, since valuable products can be recovered from plant by-products without adding solvents or water, using green processes such as MW [56].

Innovation relies on the separation of the target compounds from raw materials, which are rich in water, achieved without adding solvents or water, illustrating a circular systemic process; i.e., all materials and resources could be reintegrated into the integrated and zero-waste biorefinery [19]. Although very attractive, as expected, the design and use of real MW industrial scale equipment requires additional studies related to safety, corrosion and maintenance intervals [68].

The combination of two or more extraction/concentration methods is quite common in the literature (Table 1). As described by Boukroufa et al. [56], the removal of essential oil, polyphenols and pectin from orange waste was conducted using microwave and ultrasound technology, without adding any solvents. Essential oil separation was performed by Microwave Hydrodiffusion and Gravity (MHG), and thereafter the remaining water of this process was used as a solvent for the subsequent extraction of flavonoids and pectin. For polyphenol separation, ultrasound-assisted extraction (UAE) was used, and response surface methodology (RSM) using the central composite design (CCD) approach was used to investigate the influence of some variables. The CCD revealed that the optimized conditions of ultrasound power and temperature were 0.956 W/cm² and 59.83 °C giving a polyphenol yield of 50.02 mg GA/100 g dm, which, compared to conventional extraction, promoted an increase of 30% in the yield. Pectin was extracted by microwave-assisted extraction, resulting in a maximal yield of 24.2% for microwave power of 500 W (3 min), whereas traditional extraction provides 18.32% (120 min). As can be seen, the combination of microwave, ultrasound and recycled water resulted in higher recoveries of the compounds of interest in a shorter time, so that a systemic loop/cycle could be closed using only the resources generated in the plant. This makes the whole process optimized in terms of time, energy savings, cleanliness and reduced amount of waste.

As can be noted, ultrasound has been widely utilized for helping to extract target components from waste plant-derived sources, reducing separation time, solvents, energy consumption and improving the product quality. The effectiveness of ultrasound is attributed to the cavitation phenomenon, assisting the solubilization of the compounds of interest into the solvent, enhancing their removal from the bulk raw material [69]. According to Chemat [70], the ultrasound waves (from 20 kHz to 10 MHz) pass through an elastic medium, inducing a longitudinal displacement of particles resulting in a succession of compression and rarefaction phases in this medium. Every medium has a critical molecular distance and, below this critical point, the liquid remains intact. However, above this distance, the liquid would break down, creating voids (cavitation bubbles) in the liquid. When the size of these bubbles reaches a critical point they collapse, releasing a large amount of energy. The estimated temperature and pressure at this time are estimated at 5000 and 2000 K atmospheres. This creates hotspots that accelerate the chemical reactivity into the medium, generating microjets directed towards the solid surface, also responsible for the general higher effectiveness of this technique, as the high pressure and temperature involved in the process destroy the cell walls of the plant matrices and their content can be released into the medium more easily.

Some new process aiming at agro-industrial waste application in food industries based on ultrasound-assisted extraction of natural products have been reported

[71–79], as is the case of carotenoid separation from pomegranate peels using different vegetable oils as solvents [72]. Sunflower and soybean oils were used as solvents and parameters such as time, temperature, solid/oil ratio used were analyzed considering the yield. It was found that the optimum mild operating conditions were: extraction temperature, 51.5 °C; peel/solvent ratio, 0.10; amplitude level, 58.8%; solvent, sunflower oil. Additionally, a subsequent separation of oil and carotenoids was not necessary, since the pigmented oil can be used as a carotenoid source in different commercial products in this format.

The green recovery of cellulose from oil palm bunches by autoclave-based and ultrasonication pre-treatments were successfully developed to replace the non-green chlorite method [73]. An ultrasonic process with hydrogen peroxide yielded 49% cellulose with 9.13% alpha-cellulose content and 68.7% crystallinity, as compared to 64% cellulose with an autoclave treatment. The cellulose/polypropylene composites generated with high tensile strength, high thermal stability, and low water and diesel sorption showed great potentials for conversion into eco-composite products such as polymeric material insulated cables for high voltage engineering, automotive parts, sports tools and other household or office items.

Another highly cited green and sustainable technique to isolate organic compounds from bio-based waste is based on supercritical fluid processing (Fig. 5). It is widely known that substances at temperatures and pressures near or above their critical points have exceptional solvent characteristics for analytical purposes. These supercritical fluids possess liquid-like solvating and gas-like diffusivity power, and other tuneable properties that can be adjusted varying temperature, pressure and the addition of other components acting as a modifier. Due to its gas-like low viscosity and high diffusivity, the supercritical fluid can easily penetrate into plant materials with a fast mass transfer rate. Possibly, the most important property of supercritical fluids for separation processes is diffusion, obtaining solubility and diffusion good enough to provide quantitative extraction yield [80, 81]. Carbon dioxide (scCO₂) is the fluid most widely used for extractions, with critical parameters of 31.1 °C and 73 atm (7.39 MPa), at relatively low operating conditions. It behaves as a nonpolar or polarizable solvent and low molar mass alcohols (co-solvents) are often added in small quantities to modify the solvent polarity. Because carbon dioxide can be depressurized to the gaseous state, the solvent is easily removed and supercritical fluid-based separation methods are easily coupled with subsequent analysis. Therefore, scCO₂ provides miscibility to the majority of natural products, availability and low cost, reliably high purity, negligible toxicity, facility for removal and reuse, resulting in many advantages for downstream processing in terms of product purification and/or catalyst recycling [80].

The approach using scCO₂ has been widely used for isolation and purification of chlorophylls, carotenoids, lipids, alkaloids, antioxidants from matrices such as filter tea, spruce bark, tomato and elderberry pomace, grape, passiflora, coffee and cupuassu seed waste [82–99]. In addition to the optimization of the separation process, some studies also aim to evaluate the techno-economic viability of large-scale commercial production, for example, to obtain cupuassu butter from cold-pressed seed residues, also evaluating the influence of thermodynamic and kinetic variables of yield, chemical composition and production costs of the extracts [86]. Optimal

conditions related to extraction kinetics, chemical composition and production costs were 30–35 MPa and 50 °C. It was shown that the phenolic content (0.47–2.82 mg/g) was lower than those commonly found using other methods (20–23 mg/g). The high contents of tocopherols, as well as the unsaturated fatty acids (48%) compared to the saturated fatty acids (52%) present in the butter obtained by scCO_2 demonstrated its great potential as an ingredient in food, pharmaceutical and cosmetic industries. In addition, process intensification for biodiesel production involving supercritical fluids has been reported [84, 90]. Such approaches can allow biodiesel production without any addition of catalyst, or via catalytic in situ or reactive extraction process, combining the extraction and reaction phase together in a single operation unit. These studies also discuss both processes towards the future bio-refinery setup and more efficient use of all waste produced.

The use of fluids different to CO_2 has been described in the literature, but as they are usually organic solvents, they do not show any distinct advantages and often have high critical temperatures. Despite having a very high critical temperature, water shows unique properties in the subcritical region (200–300 °C), as a reduction in dielectric constant (20–30) and density (0.7–0.8 g/cm³) compared to water at room temperature, improving its ability to dissolve nonpolar organic and inorganic compounds. Under these conditions, the water dissociation constant into hydroxide and hydrogen ions are more than three orders of magnitude higher, so that near-critical water acts as a self-neutralizing acid or base catalyst, avoiding salt waste generation. Moreover, using subcritical and supercritical water conditions greatly simplifies the product purification step in some cases, since nonpolar products are insoluble in water in lower temperatures [80, 100–106].

Other potential scalable approaches have been described, such as enzymatic [107–114], alkaline [115–120] and based on different types of aqueous media (e.g., cyclodextrins, montmorillonite K-10/LiOH, green liquor) [121–130]; ionic liquids [131–135], deep eutectic solvents [136–138], constituting alternative methods for the recovery of high added-value compounds from agro-industrial waste aiming at obtaining the best analytical, economical and socio-environmental compromise [139–142].

Based on the investigated literature [143], Table 2 summarizes the advantages and disadvantages of the four most cited green and sustainable techniques.

4 Conclusions

The establishment of vanguard biorefineries for bioeconomy and circular economy urgently demands innovation in green and sustainable separation for the recovery of natural products from agro-industrial by-products all over the world. Sustainable separation includes the idea of integrated valorization not only in an economic sense, but also strengthens other social and environmental dimensions, from small to large producing scales. According to the literature over the last decade, the number of studies in this field has grown significantly in recent years. New approaches incorporating holistic extraction and/or purification techniques, also integrating systemic chemical transformation through the design and use of renewable materials

Table 2 Advantages and disadvantages of different technologies that were most cited as green and sustainable techniques over the last 10 years

Advantages		Disadvantages
Solvent processing	Inexpensive and simplicity; allows for solvent reuse	Does not always uses benign solvents; frequently requires an evaporation/concentration step for recovery; usually demands large amounts of solvent and long extraction time; possibility of thermal degradation
Microwave processing	Reduced extraction time; reduced solvent usage; improved extraction yield; simple and inexpensive	Not good when either target compounds or solvents are non-polar or volatiles
Ultrasonication	Inexpensive, simple and efficient; can reduce the operating temperature (good for thermolabile compounds); can be used with any solvent	Its efficiency may be linked to the nature of plant matrix; the active part of ultrasound inside the extractor is restricted to a zone located in the vicinity of the ultrasonic emitter
Supercritical fluid	Moderate extraction temperature (good for thermolabile compounds); rapid mass transfer (larger extraction rate); solubility of a chemical in a supercritical fluid can be manipulated; can eliminate concentration process; the solutes can be separated from supercritical fluids without losing volatiles due to its extreme volatility; additional filtration or centrifugation to remove solid residue is not necessary	Onerous operating conditions

and optimized processes should combine the best green analytical figures of merit with online evaluation of the whole production chain. These approaches should generate healthier and more efficient products, methods and processes at an affordable and fair cost.

Overall, solvent processing and its modification towards the enhancement of mass transfer to remove the compounds of interest from selected waste have been widely used (25%), also on industrial scales. Alternative extraction or purification methods have shown increasingly more applications, such as for microwave, ultrasonication and supercritical fluid processing. It was shown that a wide range of natural products and their derivatives are used mainly in food (as dyes, aromas, flavors) in medicines or green formulations in agriculture. According to the data available, one paradigmatic case largely studied is the valorization of citrus waste, representing more than 10% of all residues considered in the research papers.

Moreover, an emergent challenging topic is to evaluate biorefinery processing alternatives, i.e., sustainability assessment tools, for example LCA, which include parameters such as feedstock supply (to verify the suitability and adequacy of a potential biomass feedstock for the separation or transformation treatment), process performance (to assess the input–output balance of material and energy flows) and bio-based chemical production [144]. Therefore, the decision about the best separation approach takes into account various fundamental aspects and is based on green and sustainable assessment tools, considering the type of agro-industrial waste (e.g., quantity, periodicity, chemical variability, water amount, distance to the processing unit), the natural target products (chemical quality, purity, humidity, costs etc.) and available technologies.

Using sustainability indicators and tools will be increasingly demanded in this field, contributing to the greenness or sustainability of the whole processing system. The development of a sustainable separation method which provides better recovery efficiency will not only add value to the agro-industrial waste, reducing the overall manufacturing costs and the use of synthetic chemicals, but will also aggregate value to the whole production chain, including its final products. The emergence of bio-based industries is changing the current status of the producing systems, contributing to the current biomass residual losses. Based on the literature, the scenario for future research and innovation in green and sustainable separation for the recovery of agro-industrial waste is truly beginning, bringing together various areas and sectors towards more efficient and circular systems.

Acknowledgements The authors wish to thank FAPESP (13/12052-5, 14/50827-1), Capes (2032/2014-07), EPSRC-UK (EP/M028763/1) and Mateus Segatto.

Open Access This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

References

1. Liu J, Mooney H, Hull V, Davis SJ, Gaskell J, Hertel T, Lubchenco J, Seto KC, Gleick P, Kremen C, Li S (2015) Systems integration for global sustainability. *Science* 347:12588320–12588329
2. Kiser B (2016) Circular economy: getting the circulation going. *Nature* 53:443–446
3. Food and Agriculture Organization of the United Nations. World hunger on the rise again, reversing years of progress. <http://www.fao.org/news/story/en/item/902489/icode/>. Accessed 03 Jul 2017
4. Godfray HCJ, Beddington JR, Crute IR, Haddad L, Lawrence D, Muir JF, Pretty J, Robinson S, Thomas SM, Toulmin C (2010) Food security: the challenge of feeding 9 billion people. *Science* 327(5967):812–818
5. United Nations (2015) World Population prospects: the 2015 revision and key findings and advance tables. United Nations, New York. https://esa.un.org/unpd/wpp/publications/files/key_findings_wpp_2015.pdf. Accessed 20 Oct 2016
6. Xia H, Houghton JA, Clark JH, Matharu AS (2016) Potential utilization of unavoidable food supply chain wastes—valorization of pea vine wastes. *ACS Sustain Chem Eng* 4(11):6002–6009
7. Aschemann-Witzel J (2016) Waste not, want not, emit less. *Science* 297(6284):408–409
8. Perlatti B, Forim MR, Zuin VG (2014) Green chemistry, sustainable agriculture and processing systems: a Brazilian overview. *Chem Biol Technol Agric* 1:5–9
9. Foster-Carneiro L, Berni MD, Dorileo IL, Rostagno MA (2013) Biorefinery study of availability of agriculture residues and wastes for integrated biorefineries in Brazil. *Resour Conserv Recycl* 77:78–88
10. Tuck CO, Perez E, Horvath IT, Sheldon RA, Poliakov M (2012) Valorization of biomass: deriving more value from waste. *Science* 337:695–699
11. Lin CSK, Pfaltzgraff LA, Herrero-Davila L, Mubofu EB, Abderrahim S, Clark JH, Koutinas AA, Kopsahelis N, Stamatelatos K, Dickson F, Thankappan S, Mohamed Z, Brocklesby R, Luque R (2013) Food waste as a valuable resource for the production of chemicals, materials and fuels. Current situation and global perspective. *Energy Environ Sci* 6(2):426–464
12. Lin CSK, Koutinas AA, Stamatelatos K, Mubofu EB, Matharu AS, Kopsahelis N, Pfaltzgraff LA, Clark JH, Papanikolaou S, Kwan TH, Luque R (2014) Current and future trends in food waste valorization for the production of chemicals, materials and fuels: a global perspective. *Bioprod Biorefin Biofuels* 8(5):686–715
13. Lin CSK, Luque R (2014) Renewable resources and biorefineries. Royal Society of Chemistry, Cambridge
14. Papargyropoulou E, Lozano R, Steinberger J, Wright N, Zb Ujang (2014) The food waste hierarchy as a framework for the management of food surplus and food waste. *J Clean Prod* 76:106–115
15. European Parliament Council. Directive 2008/1/EC of the European Parliament and of the council of 15 January 2008 concerning integrated pollution prevention and control
16. Ragauskas AJ, Williams CK, Davison BH, Britovsek G, Cairney J, Eckert CA, Frederick WJ, Hallett JP, Leak DJ, Liotta CL, Mielenz JR, Murphy R, Templar R, Tschaplinski T (2006) The path forward for biofuels and biomaterials. *Science* 311:484–489
17. Mohan SV, Nikhil GN, Chiranjeevi P, Reddy CN, Rohit MV, Kumar AN, Sarkar O (2016) Waste biorefinery models towards sustainable circular bioeconomy: critical review and future perspectives. *Bioresour Technol* 215:2–12
18. Clark JH, Deswarte F (2015) Introduction to chemicals from biomass, 2nd edn. John Wiley and Sons Ltd., Chichester
19. Zuin VG (2016) Circularity in green chemical products, processes and services: innovative routes based on integrated eco-design and solution systems. *Curr Opin Green Sustain Chem* 2:40–44
20. Anastas PT (1999) Green chemistry and the role of analytical methodology development. *Crit Rev Anal Chem* 29:167–175
21. Clark JH, Deswarte FEI, Farmer TJ (2009) The integration of green chemistry into future biorefineries. *Biofuels Bioprod Biorefin* 3:72–90
22. Chemat F, Avian M, Cravotto G (2012) Green extraction of natural products: concept and principles. *Int J Mol Sci* 13:8615–8627
23. Clark JH, Budarin V, Deswarte FEI, Hardy JJE, Kerton FM, Hunt AJ, Luque R, Macquarrie DJ, Milkowski K, Rodriguez A, Samuel O, Tavener SJ, White RJ, Wilson AJ (2006) Green chemistry and the biorefinery: a partnership for a sustainable future. *Green Chem* 8:853–860

24. Sustainable Chemistry (2017) The Organisation for Economic Co-operation and Development (OECD). Paris. <http://www.oecd.org/chemicalsafety/risk-management/sustainablechemistry.htm> Accessed 07 Jul 2017
25. Sustainable chemistry (2017) Umweltbundesamt, Dessau-Roßlau Germany. <http://www.umweltbundesamt.de/en/topics/chemicals/chemicals-management/sustainable-chemistry#textpart-1>. Accessed 07 Jul 2017
26. Campbell SD (2016) The planner's triangle revisited: sustainability And the evolution of a planning ideal that can't stand still. *JAPA* 82(4):388–397
27. Hanson JR (2003) Natural products: the secondary metabolites. RSC, Cambridge
28. Armenta S, Garrigues S, de la Guardia M (2015) The role of green extraction techniques in Green Analytical Chemistry. *TrAC Trends Anal Chem* 71:2–8
29. Zuin VG (2016) Green sample preparation of complex matrices: towards sustainable separations of organic compounds based on the biorefinery concept. *Pure Appl Chem* 88:29–36
30. Zuin VG, Budarin VL, De Bruyn M, Shuttleworth PS, Hunt AJ, Pluciennik C, Borisova A, Dodson JR, Parker H, Clark J (2017) Polysaccharide-derived mesoporous materials (Starbon®) for sustainable separation of complex mixtures. *Faraday Discuss* 196:1–9
31. Jessop PG (2016) The use of auxiliary substances (e.g. solvents, separation agents) should be made unnecessary wherever possible and innocuous when used. *Green Chem* 18:2577–2578
32. Kiss AA, Lange J-P, Schuur B, Brilman DWF, van der Ham AGJ, Kersten SRA (2016) Separation technology: making a difference in biorefineries. *Biomass Bioenergy* 95:296–309
33. Long Z, Budarin V, Jiajun F, Sloan R, MacQuarrie DJ (2017) Efficient method of lignin isolation using microwave-assisted acidolysis and characterisation of the residual lignin. *ACS Sustain Chem Eng* 5:3768–3774
34. Abou-Shehada S, Clark JH, Paggola G, Sherwood J (2016) Tunable solvents: shades of green. *Chem Eng Process* 99:88–96
35. Lachos-Perez D, Brown AB, Mudhoo A, Martinez J, Timko MT, Rostagno MA, Forster-Carneiro T (2017) Applications of subcritical and supercritical water conditions for extraction, hydrolysis, gasification, and carbonization of biomass: a critical review. *Biofuels* 14:611–626
36. Filly A, Fabiano-Tixier AS, Louis C, Fernandez X, Chemat F (2016) Water as a green solvent combined with different techniques for extraction of essential oil from lavender flowers. *C R Chim* 19:707–717
37. Chemat F, Strube J (2015) Green extraction of natural products. Wiley, Weinheim
38. Costa ES, Perlatti B, Silva EM, Matos AP, Silva MFGF, Fernandes JB, Zuin VG, Silva CMP, Forim MR (2017) Use of lignins from sugarcane bagasse for assembling microparticles loaded with *Azadirachta indica* extracts for use as neem-based organic insecticides. *J Braz Chem Soc* 28:126–135
39. Guardia M, Garrides S (2012) Handbook of green analytical chemistry. Wiley, New York
40. Braga EM, Seabra IJ, Dias AMA, Sousa HC (2013) Recent trends and perspectives for the extraction of natural products. In: Rostagno M, Prado J (eds) Natural product extraction. RSC, Cambridge
41. Both S, Strube J, Cravatto G (2015) Mass transfer enhancement for solid–liquid extractions. In: Chemat F, Strube J (eds) Green extraction of natural products: theory and practice. Wiley, Weinheim
42. Kumar K, Yadav AN, Kumar V, Vyas P, Dhaliwal HS (2017) Food waste: a potential bioresource for extraction of nutraceuticals and bioactive compounds. *Bioresour Bioprocess* 4(1):18
43. Regulation (EC) No 1907/2006 (2006) European Parliament and of the council concerning the registration, evaluation, authorisation and restriction of chemicals (REACH). European Commission, Luxembourg. <http://eur-lex.europa.eu/legal-content/EN/TEXT/?uri=CELEX%3A02006R1907-20140410> Accessed 21 Jul 2017
44. Chemat F, Vian MA (2014) Alternative solvents for natural products extraction. Springer, Heidelberg
45. Ibanez E, Cifuentes A (2017) Green extraction techniques: principles, advances and applications. Elsevier, Amsterdam
46. Güçlü Üstündağ Ö, Erşan S, Özcan E, Özcan G, Kayra N, Ekinci FY (2016) Black tea processing waste as a source of antioxidant and antimicrobial phenolic compounds. *Eur Food Res Technol* 242:1523–1532
47. Toh PY, Leong FS, Chang SK, Khoo HE, Yim HS (2016) Optimization of extraction parameters on the antioxidant properties of banana waste. *Acta Sci Pol Technol Aliment* 15:65–78

48. Harrison JE, Oomah BD, Diarra MS, Ibarra-Alvarado C (2013) Bioactivities of pilot-scale extracted cranberry juice and pomace. *J Food Process Preserv* 37:356–365
49. Fernández-Agulló A, Pereira E, Freire MS, Valentao P, Andrade PB, González-Álvarez J, Pereira JA (2013) Influence of solvent on the antioxidant and antimicrobial properties of walnut (*Juglans regia* L.) green husk extracts. *Ind Crops Prod* 42:126–132
50. Bravo J, Monente C, Juárez I, De Peña MP, Cid C (2013) Influence of extraction process on antioxidant capacity of spent coffee. *Food Res Int* 50:610–616
51. Clodoveo ML, Dipalmo T, Rizzello CG, Corbo F, Crupi P (2016) Emerging technology to develop novel red winemaking practices: an overview. *Innov Food Sci Emerg Technol* 38:41–56
52. Liu Z, Zu Y, Yang L (2017) A process to preserve valuable compounds and acquire essential oils from pomelo flavedo using a microwave irradiation treatment. *Food Chem* 224:172–180
53. Fidalgo A, Ciriminna R, Carnaroglio D, Tamburino A, Cravotto G, Grillo G, Ilharco L, Pagliaro M (2016) Eco-friendly extraction of pectin and essential oils from orange and lemon peels. *ACS Sustain Chem Eng* 4:2243–2251
54. Zainab H, Nurfatirah N, Norfaezah A, Othman H (2016) Green bio-oil extraction for oil crops. *IOP Conf Ser Mater Sci Eng* 133:12053
55. González-Rivera J, Spepi A, Ferrari C, Duce C, Longo I, Falconieri D, Piras A, Tinè MR (2016) Novel configurations for a citrus waste based biorefinery: from solventless to simultaneous ultrasound and microwave-assisted extraction. *Green Chem* 18:6482–6492
56. Jacotet-Navarro M, Rombaut N, Deslis S, Fabiano-Tixier AS, Pierre FX, Bily A, Chemat F (2016) Towards a “dry” bio-refinery without solvents or added water using microwaves and ultrasound for total valorization of fruit and vegetable by-products. *Green Chem* 18:3106–3115
57. Boukroufa M, Boutekedjiret C, Petigny L, Rakotomanomana N, Chemat F (2015) Bio-refinery of orange peels waste: a new concept based on integrated green and solvent free extraction processes using ultrasound and microwave techniques to obtain essential oil, polyphenols and pectin. *Ultrason Sonochem* 24:72–79
58. Alexandru L, Binello A, Mantegna S, Boffa L, Chemat F, Cravotto G (2014) Efficient green extraction of polyphenols from post-harvested agro-industry vegetal sources in Piedmont. *C R Chim* 17:212–217
59. Attard TM, Watterson B, Budarin VL, Clark JH, Hunt AJ (2014) Microwave-assisted extraction as an important technology for valorising orange waste. *N J Chem* 38:2278–2283
60. Ahangari B, Sargolzaei J (2013) Extraction of lipids from spent coffee grounds using organic solvents and supercritical carbon dioxide. *J Food Process Preserv* 37:1014–1021
61. Passos CP, Coimbra MA (2013) Microwave superheated water extraction of polysaccharides from spent coffee grounds. *Carbohydr Polym* 94:626–633
62. Farhat A, Fabiano-Tixier A-S, El Maataoui M, Maingonnat JF, Romdhane M, Chemat F (2011) Microwave steam diffusion for extraction of essential oil from orange peel: kinetic data, extract’s global yield and mechanism. *Food Chem* 125:255–261
63. Liazid A, Guerrero RF, Cantos E, Palma M, Barroso CG (2011) Microwave-assisted extraction of anthocyanins from grape skins. *Food Chem* 124:1238–1243
64. Tsubaki S, Sakamoto M, Azuma J (2010) Microwave-assisted extraction of phenolic compounds from tea residues under autohydrolytic conditions. *Food Chem* 123:1255–1258
65. Bousbia N, Vian MA, Ferhat MA, Meklati BY, Chemat F (2009) A new process for extraction of essential oil from Citrus peels: microwave hydrodiffusion and gravity. *J Food Eng* 90:409–413
66. Tsubaki S, Iida H, Sakamoto M, Azuma J (2008) Microwave heating of tea residue yields polysaccharides, polyphenols, and plant biopolyester. *J Agric Food Chem* 56:11293–11299
67. Balu AM, Budarin V, Shuttleworth PS, Pfaltzgraff LA, Waldron K, Luque R, Clark JH (2012) Valorisation of orange peel residues: waste to biochemicals and nanoporous materials. *Chemsuschem* 5:1694–1697
68. Chemat F, Cravotto G (2013) Microwave-assisted extraction for bioactive compounds: theory and practice. Springer, Heidelberg
69. Preece KE, Hooshyar N, Krijgsman AJ, Fryer PJ, Zuidam NJ (2017) Pilot-scale ultrasound-assisted extraction of protein from soybean processing materials. *J Food Eng* 206:1–12
70. Chemat F, Huma Z, Khan MK (2011) Applications of ultrasound in food technology: processing, preservation and extraction. *Ultrason Sonochem* 18:813–835
71. Bibi I, Sultan A, Kamal S, Nouren S, Safa Y, Jalani K, Sultan M, Atta S, Rehman F (2017) Extraction and quantification of phenolic compounds from *Prunus armeniaca* seed and their role in bio-transformation of xenobiotic compounds. *Korean J Chem Eng* 34(2):392–399

72. Goula AM, Ververi M, Adamopoulou A, Kaderides K (2017) Green ultrasound-assisted extraction of carotenoids from pomegranate wastes using vegetable oils. *Ultrason Sonochem* 34:821–830
73. Abdullah MA, Nazir MS, Raza MR, Wahjoedi BA, Yussof AW (2016) Autoclave and ultra-sonication treatments of oil palm empty fruit bunch fibers for cellulose extraction and its polypropylene composite properties. *J Clean Prod* 126:686–697
74. Trasanidou D, Apostolakis A, Makris DP (2016) Development of a green process for the preparation of antioxidant and pigment-enriched extracts from winery solid wastes using response surface methodology and kinetics. *Chem Eng Commun* 203:1317–1325
75. Mouratoglou E, Malliou V, Makris DP (2016) Novel glycerol-based natural eutectic mixtures and their efficiency in the ultrasound-assisted extraction of antioxidant polyphenols from agri-food waste biomass. *Waste Biomass Valoriz* 7:1377–1387
76. Paleologou I, Vasiliou A, Grigorakis S, Makris DP (2016) Optimisation of a green ultrasound-assisted extraction process for potato peel (*Solanum tuberosum*) polyphenols using bio-solvents and response surface methodology. *Biomass Convers Biorefin* 6:289–299
77. Li A-N, Li S, Xu D-P, Xu X-R, Chen Y-M, Ling W-H, Chen F, Li H-B (2015) Optimization of ultrasound-assisted extraction of lycopene from papaya processing waste by response surface methodology. *Food Anal Methods* 8:1207–1214
78. Geerkens CH, Matejka AE, Carle R, Schweiggert RM (2015) Development and validation of an HPLC method for the determination of alk(en)ylresorcinols using rapid ultrasound-assisted extraction of mango peels and rye grains. *Food Chem* 169:261–269
79. Punzi R, Paradiso A, Fasciano C, Trani A, Faccia M, de Pinto MC, Gambacorta G (2014) Phenols and antioxidant activity in vitro and in vivo of aqueous extracts obtained by ultrasound-assisted extraction from artichoke by-products. *Nat Prod Commun* 9:1315–1318
80. Guardia M, Garrides S (2011) Challenges in green analytical chemistry. RSC, Cambridge
81. Khaw K-Y, Parat M-O, Shaw PN, Falconer JR (2017) Solvent supercritical fluid technologies to extract bioactive compounds from natural sources: a review. *Molecules* 22:1186–1208
82. Kehili M, Schmidt LM, Reynolds W, Zammel A, Zetzl C, Smirnova I, Allouche N, Sayadi S (2016) Biorefinery cascade processing for creating added value on tomato industrial by-products from Tunisia. *Biotechnol Biofuels* 9:261
83. Pavlić B, Đurković AV, Vladić J, Gavarić A, Zeković Z, Tepić A, Vidović S (2016) Extraction of minor compounds (chlorophylls and carotenoids) from yarrow-rose hip mixtures by traditional versus green technique. *J Food Process Eng* 39:418–424
84. Gumba RE, Saallah S, Misson M, Ongkudon CM, Anton A (2016) Green biodiesel production: a review on feedstock, catalyst, monolithic reactor, and supercritical fluid technology. *Biofuel Res J* 3:431–447
85. Jokić S, Bijuk M, Aladić K, Bilić M, Molnar M (2016) Optimisation of supercritical CO₂ extraction of grape seed oil using response surface methodology. *Int J Food Sci Technol* 51:403–410
86. Cavalcanti RN, Albuquerque CLC, Meireles MAA (2016) Supercritical CO₂ extraction of cupuassu butter from defatted seed residue: experimental data, mathematical modeling and cost of manufacturing. *Food Bioprod Process* 97:48–62
87. Marto J, Gouveia LF, Chiari BG, Paiva A, Isaac V, Pinto P, Simões P, Almeida AJ, Ribeiro HM (2016) The green generation of sunscreens: using coffee industrial sub-products. *Ind Crops Prod* 80:93–100
88. Oliveira DA, Angonese M, Gomes C, Ferreira SRS (2016) Valorization of passion fruit (*Passiflora edulis* sp.) by-products: sustainable recovery and biological activities. *J Supercrit Fluids* 111:55–62
89. Viganó J, da Machado APF, Martínez J (2015) Sub- and supercritical fluid technology applied to food waste processing. *J Supercrit Fluids* 96:272–286
90. Lee KT, Lim S, Pang YL, Ong HC, Chong WT (2014) Integration of reactive extraction with supercritical fluids for process intensification of biodiesel production: prospects and recent advances. *Prog Energy Combust Sci* 45:54–78
91. Ribeiro H, Marto J, Raposo S, Agapito M, Isaac V, Chiari BG, Lisboa PF, Paiva A, Barreiros S, Simões P (2013) From coffee industry waste materials to skin-friendly products with improved skin fat levels. *Eur J Lipid Sci Technol* 115:330–336
92. Xynos N, Papaefstathiou G, Psychis M, Argyropoulou A, Aliogiannis N, Skaltsounis AL (2012) Development of a green extraction procedure with super/subcritical fluids to produce extracts enriched in oleuropein from olive leaves. *J Supercrit Fluids* 67:89–93
93. Co M, Fagerlund A, Engman L, Sunnerheim K, Sjöberg PJ, Turner C (2012) Extraction of antioxidants from Spruce (*Picea abies*) bark using eco-friendly solvents. *Phytochem Anal* 23:1–11

94. Tello J, Viguera M, Calvo L (2011) Extraction of caffeine from Robusta coffee (*Coffea canephora* var. Robusta) husks using supercritical carbon dioxide. *J Supercrit Fluids* 59:53–60
95. Budarin VL, Shuttleworth PS, Dodson JR, Hunt AJ, Lanigan B, Marriott R, Milkowski KJ, Wilson AJ, Breeden SW, Fan J, Sin EHK, Clark JH (2011) Use of green chemical technologies in an integrated biorefinery. *Energy Environ Sci* 4:471–479
96. İçen H, Gürü M (2010) Effect of ethanol content on supercritical carbon dioxide extraction of caffeine from tea stalk and fiber wastes. *J Supercrit Fluids* 55:156–160
97. Seabra IJ, Braga MEM, Batista MT, de Sousa HC (2010) Effect of solvent (CO₂/ethanol/H₂O) on the fractionated enhanced solvent extraction of anthocyanins from elderberry pomace. *J Supercrit Fluids* 54:145–152
98. Wu H, Hu W, Zhang Y, Huang L, Zhang J, Tan S, Cai X, Xal Liao (2016) Effect of oil extraction on properties of spent coffee ground–plastic composites. *J Mater Sci* 51:10205–10214
99. İçen H, Gürü M (2009) Extraction of caffeine from tea stalk and fiber wastes using supercritical carbon dioxide. *J Supercrit Fluids* 50:225–228
100. Tian Y, Wang Y, Ma Y, Zhu P, He J, Lei J (2017) Optimization of subcritical water extraction of resveratrol from grape seeds by response surface methodology. *Appl Sci* 7(4):321
101. Ahmadian-Kouchaksaraie Z, Niazmand R, Najafi MN (2016) Optimization of the subcritical water extraction of phenolic antioxidants from *Crocus sativus* petals of saffron industry residues: Box–Behnken design and principal component analysis. *Innov Food Sci Emerg Technol* 36:234–244
102. Abdelmoez W, Ashour E, Naguib SM (2015) A review on green trend for oil extraction using subcritical water technology and biodiesel production. *J Oleo Sci* 64:467–478
103. Ravber M, Knez Ž, Škerget M (2015) Simultaneous extraction of oil- and water-soluble phase from sunflower seeds with subcritical water. *Food Chem* 166:316–323
104. Shalmashi A, Abedi M, Golmohammad F, Eikani MH (2009) Isolation of caffeine from tea waste using subcritical water extraction. *J Food Process Eng* 33:701–711
105. Pourali O, Asghari FS, Yoshida H (2010) Production of phenolic compounds from rice bran biomass under subcritical water conditions. *Chem Eng J* 160:259–266
106. Pourali O, Asghari FS, Yoshida H (2009) Sub-critical water treatment of rice bran to produce valuable materials. *Food Chem* 115:1–7
107. Liew SQ, Chin NL, Yusof YA, Sowndhararajan K (2016) Comparison of acidic and enzymatic pectin extraction from passion fruit peels and its gel properties. *J Food Process Eng* 39:501–511
108. Nath P, Kaur C, Rudra SG, Varghese E (2016) Enzyme-assisted extraction of carotenoid-rich extract from red capsicum (*Capsicum annuum*). *Agric Res* 5:193–204
109. Patil PD, Rao CR, Wasif AI, Anekar SV, Nagla JR (2015) Cashew-nut husk natural dye extraction using Taguchi optimization: green chemistry approach. *J Sci Ind Res (India)* 74:512–517
110. Madeira JV, Macedo GA (2015) Simultaneous extraction and biotransformation process to obtain high bioactivity phenolic compounds from Brazilian citrus residues. *Biotechnol Prog* 31:1273–1279
111. Mushtaq M, Sultana B, Bhatti HN, Asgher M (2014) Optimization of enzyme-assisted revalorization of sweet lime (*Citrus limetta* Risso) peel into phenolic antioxidants. *BioResources* 9:6153–6165
112. Cuccolini S, Aldini A, Visai L, Daglia M, Ferrari D (2013) Environmentally friendly lycopene purification from tomato peel waste: enzymatic-assisted aqueous extraction. *J Agric Food Chem* 61:1646–1651
113. Zykwinska A, Boiffard MH, Kontkanen H, Buchert J, Thibault JF, Bonnin E (2008) Extraction of green labeled pectins and pectic oligosaccharides from plant byproducts. *J Agric Food Chem* 56:8926–8935
114. Zarevúcka M, Wimmer Z (2008) Plant products for pharmacology: application of enzymes in their transformations. *Int J Mol Sci* 9:2447–2473
115. Manzato L, Rabelo LCA, de Souza SM, da Silva CG, Sanches EA, Rabelo D, Mariuba LAM, Simonsen J (2017) New approach for extraction of cellulose from tucumã's endocarp and its structural characterization. *J Mol Struct* 1143:229–234
116. Dhamole PB, Chavan S, Patil RG, Feng H, Bule M, Kinninge P (2016) Extraction of p-coumaric acid from agricultural residues and separation using “sugaring out”. *Korean J Chem Eng* 33:1860–1864
117. Zhang C, Van Krimpen MM, Sanders JPM, Bruins ME (2016) Improving yield and composition of protein concentrates from green tea residue in an agri-food supply chain: effect of pre-treatment. *Food Bioprod Process* 100:92–101

118. Rahman MM, Ho K, Netravali AN (2015) Bio-based polymeric resin from agricultural waste, neem (*Azadirachta indica*) seed cake, for green composites. *J Appl Polym Sci* 132:1–11
119. Zhang C, Sanders JPM, Xiao TT, Bruins ME (2015) How does alkali aid protein extraction in green tea leaf residue: a basis for integrated biorefinery of leaves. *PLoS One* 10:e0133046
120. Mudassar HR, Melin K, Koskinen J (2014) Production of carboxylic acids from alkaline pretreatment byproduct of softwood. *Cellul Chem Technol* 48:835–842
121. Diamanti AC, Igoumenidis PE, Mourtzinou I, Yannakopoulou K, Karathanos VT (2017) Green extraction of polyphenols from whole pomegranate fruit using cyclodextrins. *Food Chem* 214:61–66
122. Das AM, Hazarika MP, Goswami M, Yadav A, Khound P (2016) Extraction of cellulose from agricultural waste using Montmorillonite K-10/LiOH and its conversion to renewable energy: biofuel by using *Myrothecium gramineum*. *Carbohydr Polym* 141:20–27
123. Cabrera MN, Arrosbide MF, Franzoni P, Cassella N (2016) Integrated forest biorefineries: green liquor extraction in eucalyptus wood prior to kraft pulping. *Biomass Convers Biorefin* 6:465–474
124. Xavier L, Freire MS, Vidal-Tato I, González-Álvarez J (2014) Aqueous two-phase systems for the extraction of phenolic compounds from eucalyptus (*Eucalyptus globulus*) wood industrial wastes. *J Chem Technol Biotechnol* 89:1772–1778
125. Elksibi I, Haddar W, Ticha MB, Gharbi R, Mhenni MF (2014) Development and optimisation of a non conventional extraction process of natural dye from olive solid waste using response surface methodology (RSM). *Food Chem* 161:345–352
126. Avinc O, Celik A, Gedik G, Yavas A (2013) Natural dye extraction from waste barks of Turkish red pine (*Pinus brutia* Ten.) timber and eco-friendly natural dyeing of various textile fibers. *Fibers Polym* 14:866–873
127. Sun-Waterhouse D, Wang W, Waterhouse GIN, Wadhwa SS (2013) Utilisation potential of feijoa fruit wastes as ingredients for functional foods. *Food Bioprocess Technol* 6:3441–3455
128. Babkin VA, Malkov YA, Medvedeva EN, Trofimova NN, Ivanova NV (2012) An eco-friendly technology for polysaccharide production from logging and sawing waste. *Russ J Gen Chem* 82:955–962
129. Bertaud F, Tapin-Lingua S, Pizzi A, Navarrete P, Petit-Conil M (2012) Development of green adhesives for fibreboard manufacturing, using tannins and lignin from pulp mill residues. *Cellul Chem Technol* 46:7–8
130. Kim JH, Pan JH, Heo W, Lee H, Kwon EG, Lee H-G, Shin DH, Liu RH, Kim YJ (2010) Effects of cellulase from *Aspergillus niger* and solvent pretreatments on the extractability of organic green tea waste. *J Agric Food Chem* 58:10747–10751
131. Feng X, Song H, Dong B, Yang Y, Yao S (2017) Sequential extraction and separation using ionic liquids for stilbene glycoside and anthraquinones in *Polygonum multiflorum*. *J Mol Liq* 241:27–36
132. Li D, Qian Y, Tian YJ, Yuan SM, Wei W, Wang G (2017) Optimization of ionic liquid-assisted extraction of biflavonoids from *Selaginella doederleinii* and evaluation of its antioxidant and anti-tumor activity. *Molecules* 22(4):586
133. Larriba M, Omar S, Navarro P, García J, Rodríguez F, Gonzalez-Miquel M (2016) Recovery of tyrosol from aqueous streams using hydrophobic ionic liquids: a first step towards developing sustainable processes for olive mill wastewater (OMW) management. *RSC Adv* 6:18751–18762
134. Yao S, Yang Y-Y, Song H, Wang Y, Wan H-Q (2015) Quantitative industrial analysis of lignocellulosic composition in typical agro-residues and extraction of inner hemicelluloses with ionic liquid. *J Sci Ind Res (India)* 74:58–63
135. Achiniwu EC, Howard RM, Li G, Gracz H, Henderson WA (2014) Lignin extraction from biomass with protic ionic liquids. *Green Chem* 16:1114–1119
136. Wang T, Jiao J, Gai QY, Wang P, Guo N, Niu LL, Fu YJ (2017) Enhanced and green extraction polyphenols and furanocoumarins from Fig (*Ficus carica* L.) leaves using deep eutectic solvents. *J Pharm Biomed Anal* 145:339–345
137. Liu Y, Chen W, Xia Q, Guo B, Wang Q, Liu S, Liu Y, Li J, Yu H (2017) Efficient cleavage of lignin-carbohydrate complexes and ultrafast extraction of lignin oligomers from wood biomass by microwave-assisted treatment with deep eutectic solvent. *Chemoschem* 10(8):1692–1700
138. Jeong KM, Zhao J, Jin Y, Heo SR, Han SY, Yoo DE, Lee J (2015) Highly efficient extraction of anthocyanins from grape skin using deep eutectic solvents as green and tunable media. *Arch Pharm Res* 38:2143–2152

139. Basset C, Kedidi S, Barakat A (2016) Chemical—and solvent-free mechanophysical fractionation of biomass induced by tribo—electrostatic charging: separation of proteins and lignin. *ACS Sustain Chem Eng* 4:4166–4173
140. Oliveira CS, Gomes FS, Constant LS, Silva LF, Godoy RL, Tonon RV, Cabral LM (2016) Integrated membrane separation processes aiming to concentrate and purify lycopene from watermelon juice. *Innov Food Sci Emerg Technol* 38:149–154
141. Ward DP, Cárdenas-Fernández M, Hewitson P, Ignatova S, Lye GJ (2015) Centrifugal partition chromatography in a biorefinery context: separation of monosaccharides from hydrolysed sugar beet pulp. *J Chromatogr A* 1411:84–91
142. Roselló-Soto E, Koubaa M, Moubarik A, Lopes RP, Saraiva JA, Boussetta N, Grimi N, Barba FJ (2015) Emerging opportunities for the effective valorization of wastes and by-products generated during olive oil production process: non-conventional methods for the recovery of high-added value compounds. *Trends Food Sci Technol* 45:296–310
143. Wang L, Weller CL (2006) Recent advances in extraction of nutraceuticals from plants. *Trends Food Sci Technol* 17(6):300–312
144. Parajuli R, Dalgaard T, Jørgensen U, Adamsen APS, Knudsen MT, Birkved M, Gylling M, Schjørring JK (2015) Biorefining in the prevailing energy and materials crisis: a review of sustainable pathways for biorefinery value chains and sustainability assessment methodologies. *Renew Sustain Energy Rev* 43:244–263
145. Koubaa M, Lepreux L, Barba FJ, Mhemdi H, Vorobiev E (2017) Gas-assisted mechanical expression (GAME) for the selective recovery of lipophilic and hydrophilic compounds from olive kernel. *J Clean Prod* 166:387–394
146. Castro-Puyana M, Marina ML, Plaza M (2017) Water as green extraction solvent: principles and reasons for its use. *Curr Opin Green Sustain Chem* 5:31–36
147. Kusuma HS, Mahfud M (2017) Comparison of conventional and microwave-assisted distillation of essential oil from *Pogostemon cablin* leaves: analysis and modelling of heat and mass transfer. *J Appl Res Med Aromat Plants* 4:55–65
148. Rosa R, Tassi L, Orteca G, Saladini M, Villa C, Veronesi P, Leonelli C, Ferrari E (2017) Process intensification by experimental design application to microwave-assisted extraction of phenolic compounds from *Juglans regia* L. *Food Anal Methods* 10(3):575–586
149. Zhu Y, Song H, Zhang X, Chen C, Zhao S, Ge F, Liu D (2017) Recovery of flavonoids from walnuts de-pellicle wastewater with macroporous resins and evaluation of antioxidant activities in vitro. *J Food Process Eng* 40:1
150. Vardanega R, Carvalho PI, Albarelli JQ, Santos DT, Meireles MAA (2017) Techno-economic evaluation of obtaining Brazilian ginseng extracts in potential production scenarios. *Food Bioprod Process* 101:45–55
151. Chemat F, Rombaut N, Sicaire AG, Meullemiestre A, Fabiano-Tixier AS, Abert-Vian M (2017) Ultrasound-assisted extraction of food and natural products. Mechanisms, techniques, combinations, protocols and applications. A review. *Ultrason Sonochem* 34:540–560
152. Puga H, Alves RC, Costa AS, Vinha AF, Oliveira MBP (2017) Multi-frequency multimode modulated technology as a clean, fast, and sustainable process to recover antioxidants from a coffee by-product. *J Clean Prod* 168:14–21
153. Pavlić B, Naffati A, Hojan T, Vladić J, Zeković Z, Vidović S (2017) Microwave-assisted extraction of wild apple fruit dust—production of polyphenol-rich extracts from filter tea factory by-products. *J Food Process Eng* 40:4
154. Alañón ME, Alarcón M, Marchante L, Díaz-Maroto MC, Pérez-Coello MS (2017) Extraction of natural flavorings with antioxidant capacity from cooperage by-products by green extraction procedure with subcritical fluids. *Ind Crops Prod* 103:222–232
155. Arevalo-Gallegos A, Ahmad Z, Asgher M, Parra-Saldivar R, Iqbal HM (2017) Lignocellulose: a sustainable material to produce value-added products with a zero waste approach—a review. *Int J Biol Macromol* 99:308–318
156. Lozano-Sánchez J, Bendini A, Di Lecce G, Valli E, Gallina Toschi T, Segura-Carretero A (2017) Macro and micro functional components of a spreadable olive by-product (pâté) generated by new concept of two-phase decanter. *Eur J Lipid Sci Technol* 119:1
157. Klinjapo R, Klinjapo R, Areerat K, Areerat K, Sutthirak P, Sutthirak P (2017) Study effect of natural extracts on the antioxidant activity in pork balls. *Br Food J* 119(10):2217–2228

158. Pinela J, Prieto MA, Barreiro MF, Carvalho AM, Oliveira MBP, Curran TP, Ferreira IC (2017) Valorisation of tomato wastes for development of nutrient-rich antioxidant ingredients: a sustainable approach towards the needs of the today's society. *Innov Food Sci Emerg Technol* 41:160–171
159. García-Pérez JS, Robledo-Padilla F, Cuellar-Bermudez SP, Arévalo-Gallegos A, Parra-Saldivar R, Zavala-Yoe R, Ramirez-Mendoza RA, Iqbal HMN (2017) Thermodynamics and statistical correlation between supercritical-CO₂ fluid extraction and bioactivity profile of locally available Mexican plants extracts. *J Supercrit Fluids* 122:27–34
160. Cerempei A, Mureşan EI, Cimpoeşu N, Carp-Cărare C, Rimbu C (2016) Dyeing and antibacterial properties of aqueous extracts from quince (*Cydonia oblonga*) leaves. *Ind Crops Prod* 94:216–225
161. Rodríguez-López L, Vecino X, Barbosa-Pereira L, Moldes AB, Cruz JM (2016) A multifunctional extract from corn steep liquor: antioxidant and surfactant activities. *Food Funct* 7:3724–3732
162. Wildermuth SR, Young EE, Were LM (2016) Chlorogenic acid oxidation and its reaction with sunflower proteins to form green-colored complexes. *Compr Rev Food Sci Food Saf* 15:829–843
163. Amiri-Rigi A, Abbasi S, Scanlon MG (2016) Enhanced lycopene extraction from tomato industrial waste using microemulsion technique: optimization of enzymatic and ultrasound pre-treatments. *Innov Food Sci Emerg Technol* 35:160–167
164. Barba FJ, Zhu Z, Koubaa M, Sant'Ana AS, Orlie V (2016) Green alternative methods for the extraction of antioxidant bioactive compounds from winery wastes and by-products: a review. *Trends Food Sci Technol* 49:96–109
165. Ravber M, Knez Ž, Škerget M (2015) Isolation of phenolic compounds from larch wood waste using pressurized hot water: extraction, analysis and economic evaluation. *Cellulose* 22:3359–3375
166. Amiri-Rigi A, Abbasi S (2016) Microemulsion-based lycopene extraction: effect of surfactants, co-surfactants and pretreatments. *Food Chem* 197:1002–1007
167. Lucas-Torres C, Lorente A, Cabañas B, Moreno A (2016) Microwave heating for the catalytic conversion of melon rind waste into biofuel precursors. *J Clean Prod* 138:59–69
168. Papaioannou EH, Liakopoulou-Kyriakides M, Karabelas AJ (2016) Natural origin lycopene and its “green” downstream processing. *Crit Rev Food Sci Nutr* 56:686–709
169. Rajabinejad H, Bucişcanu I-I, Maier S-S (2016) Practical ways of extracting keratin from keratinous wastes and by-products: a review. *Environ Eng Manag J* 15:1131–1147
170. Sixt M, Koudous I, Strube J (2016) Process design for integration of extraction, purification and formulation with alternative solvent concepts. *C R Chim* 19:733–748
171. Delisi R, Saiano F, Pagliaro M, Ciriminna R (2016) Quick assessment of the economic value of olive mill waste water. *Chem Cent J* 10:63
172. Suteu D, Zaharia C, Popovici C, Malutan T, Rusu L, Tabacaru L (2016) Wood waste as a renewable source of energy. *Environ Eng Manag J* 15:665–673
173. Talmaciu AI, Volf I, Popa VI (2015) A comparative analysis of the “green” techniques applied for polyphenols extraction from bioresources. *Chem Biodivers* 12:1635–1651
174. Katsampa P, Valsamedou E, Grigorakis S, Makris DP (2015) A green ultrasound-assisted extraction process for the recovery of antioxidant polyphenols and pigments from onion solid wastes using Box–Behnken experimental design and kinetics. *Ind Crops Prod* 77:535–543
175. Ramamoorthy SK, Skrifvars M, Persson A (2015) A review of natural fibers used in biocomposites: plant, animal and regenerated cellulose fibers. *Polym Rev* 55:107–162
176. Madeira Junior JV, Teixeira CB, Macedo GA (2015) Biotransformation and bioconversion of phenolic compounds obtainment: an overview. *Crit Rev Biotechnol* 35:75–81
177. Fan R, Yuan F, Wang N, Gao Y, Huang Y (2015) Extraction and analysis of antioxidant compounds from the residues of *Asparagus officinalis* L. *J Food Sci Technol* 52:2690–2700
178. Christiaens S, Uwibambe D, Uytendaele M, Van Droogenbroeck B, Van Loey AM, Hendrickx ME (2015) Pectin characterisation in vegetable waste streams: a starting point for waste valorisation in the food industry. *LWT Food Sci Technol* 61:275–282
179. Vauchel P, Galván D'Alessandro L, Dhulster P, Nikov I, Dimitrov K (2015) Pilot scale demonstration of integrated extraction–adsorption eco-process for selective recovery of antioxidants from berries wastes. *J Food Eng* 158:1–7
180. Hamad F, Mubofu E (2015) Potential biological applications of bio-based anacardic acids and their derivatives. *Int J Mol Sci* 16:8569–8590
181. Sandei L, Bandini M, Del Rio D (2015) Recovery of tomato bioactive compounds through a biocompatible and eco-sustainable new technology for the production of enriched “nutraceutical tomato products”. *Acta Hort* 1081:345–351

182. Shitu A, Izhar S, Tahir TM (2015) Sub-critical water as a green solvent for production of valuable materials from agricultural waste biomass: a review of recent work. *Glob J Environ Sci Manag* 1:255–264
183. Attard TM, McElroy CR, Rezende CA, Polikarpov I, Clark JH, Hunt AJ (2015) Sugarcane waste as a valuable source of lipophilic molecules. *Ind Crops Prod* 76:95–103
184. Nagel A, Mix K, Kuebler S, Bogner H, Kienzle S, Elstner P, Carle R, Neidhart S (2015) The arabinogalactan of dried mango exudate and its co-extraction during pectin recovery from mango peel. *Food Hydrocoll* 46:134–143
185. Low JH, Rahman WAWA, Jamaluddin J (2015) The influence of extraction parameters on spent coffee grounds as a renewable tannin resource. *J Clean Prod* 101:222–228
186. Mena P, Ascacio-Valdés JA, Gironés-Vilaplana A, Del Rio D, Moreno DA, García-Viguera C (2014) Assessment of pomegranate wine lees as a valuable source for the recovery of (poly) phenolic compounds. *Food Chem* 145:327–334
187. Mamma D, Christakopoulos P (2014) Biotransformation of citrus by-products into value added products. *Waste Biomass Valoriz* 5:529–549
188. Jenkins RW, Stageman NE, Fortune CM, Chuck CJ (2014) Effect of the type of bean, processing, and geographical location on the biodiesel produced from waste coffee grounds. *Energy Fuels* 28:1166–1174
189. Zakikhani P, Zahari R, Sultan MTH, Majid DL (2014) Extraction and preparation of bamboo fibre-reinforced composites. *Mater Des* 63:820–828
190. Oliveira AL, Destandau E, Fougère L, Lafosse M (2014) Isolation by pressurised fluid extraction (PFE) and identification using CPC and HPLC/ESI/MS of phenolic compounds from Brazilian cherry seeds (*Eugenia uniflora* L.). *Food Chem* 145:522–529
191. Araniti F, Marrelli M, Lupini A, Mercati F, Statti GA, Abenavoli MR (2014) Phytotoxic activity of *Cachrys pungens* Jan, a Mediterranean species: separation, identification and quantification of potential allelochemicals. *Acta Physiol Plant* 36:1071–1083
192. Schnitzer M, Monreal CM, Powell EE (2014) Wheat straw biomass: a resource for high-value chemicals. *J Environ Sci Heal Part B* 49:51–67
193. Arvayo-Enríquez H, Mondaca-Fernández I, Gortáez-Moroyoqui P, López-Cervantes J, Rodríguez-Ramírez R (2013) Carotenoids extraction and quantification: a review. *Anal Methods* 5:2916
194. Simões J, Nunes FM, Domingues MR, Coimbra MA (2013) Extractability and structure of spent coffee ground polysaccharides by roasting pre-treatments. *Carbohydr Polym* 97:81–89
195. Royer M, Kinuani N, Diouf PN (2013) Forest extractives, the 4th pathway of the Forest biorefinery concept. *J FOR* 3:32–41
196. Fameau A-L, Gaillard C, Marion D, Bakan B (2013) Interfacial properties of functionalized assemblies of hydroxy-fatty acid salts isolated from fruit tomato peels. *Green Chem* 15:341–346
197. Shahid-ul-Islam Shahid M, Mohammad F (2013) Perspectives for natural product based agents derived from industrial plants in textile applications—a review. *J Clean Prod* 57:2–18
198. Panusa A, Zuorro A, Lavecchia R, Marrosu G, Petrucci R (2013) Recovery of natural antioxidants from spent coffee grounds. *J Agric Food Chem* 61:4162–4168
199. Tan HP, Li HP, Song H, Xu WP, Guan C, Ran LP (2012) A novel way of separation and preparation noncaffeine tea polyphenols from green tea waste. *Adv Mater Res* 550–553:1875–1880
200. Durante M, Lenucci MS, Rescio L, Mita G, Caretto S (2012) Durum wheat by-products as natural sources of valuable nutrients. *Phytochem Rev* 11:255–262
201. Liew MS, Shamsuddin AH, Yew GZ (2011) Fiber resin matrix composites: nature's gift. *WIT Trans Ecol Environ* 148:131–140
202. Clark JH, Fitzpatrick EM, Macquarrie DJ, Pfaltzgraff LA, Sherwood J (2012) *p*-Cymenesulphonic acid: an organic acid synthesised from citrus waste. *Catal Today* 190:144–149
203. Yuda N, Tanaka M, Suzuki M, Asano Y, Ochi H, Iwatsuki K (2012) Polyphenols extracted from black tea (*Camellia sinensis*) residue by hot-compressed water and their inhibitory effect on pancreatic lipase in vitro. *J Food Sci* 77:H254–H261
204. Li ZJ, Wei Z, Xiao W, Wang J, Wu FA (2012) Recovery of tea polyphenols from green tea waste by liquid–liquid extraction. *Adv Mater Res* 396–398:1592–1595
205. Li CP, Wang LL, Jin ZS, Tang L (2012) Study on the extraction technique of poly-methoxyflavonoids from citrus peels by using response surface methodology. *Adv Mater Res* 560–561:544–549
206. Périno-Issartier S, Zill-e-Huma Abert-Vian M, Chemat F (2011) Solvent free microwave-assisted extraction of antioxidants from sea buckthorn (*Hippophae rhamnoides*) food by-products. *Food Bioprocess Technol* 4:1020–1028

207. Lozano-Sánchez J, Giambanelli E, Quirantes-Piné R, Cerretani L, Bendini A, Segura-Carretero A, Fernández-Gutiérrez A (2011) Wastes generated during the storage of extra virgin olive oil as a natural source of phenolic compounds. *J Agric Food Chem* 59:11491–11500
208. Chemat-Djenni Z, Ferhat MA, Tomao V, Chemat F (2010) Carotenoid extraction from tomato using a green solvent resulting from orange processing waste. *J Essent Oil Bear Plants* 13:139–147
209. Tsukayama M, Sasaki T, Yamamoto K, Kawamura Y, Ichikawa R (2010) Microwave-assisted extraction and methylation of useful flavones from waste peels of citrus sudachi. *Nippon Shokuhin Kagaku Kogaku Kaishi* 57:427–433
210. Vieira MA, Maraschin M, Pagliosa CM, Podestá R, De Simas KN, Rockenbach II, Amboni RDMC, Amante ER (2010) Phenolic acids and methylxanthines composition and antioxidant properties of mate (*Ilex paraguariensis*) residue. *J Food Sci* 75:C280–C285
211. Sun-Waterhouse D, Wen I, Wibisono R, Melton LD, Wadhwa S (2009) Evaluation of the extraction efficiency for polyphenol extracts from by-products of green kiwifruit juicing. *Int J Food Sci Technol* 44:2644–2652
212. Bhat R, Khalil HPSA, Karim AA (2009) Exploring the antioxidant potential of lignin isolated from black liquor of oil palm waste. *C R Biol* 332:827–831
213. Wijngaard H, Brunton N (2009) The optimization of extraction of antioxidants from apple pomace by pressurized liquids. *J Agric Food Chem* 57:10625–10631
214. Liang H, Li C, Yuan Q, Vriesekoop F (2007) Separation and purification of sulforaphane from broccoli seeds by solid phase extraction and preparative high-performance liquid chromatography. *J Agric Food Chem* 55:8047–8053
215. Senol A, Aydin A (2006) Solid-liquid extraction of caffeine from tea waste using battery type extractor: process optimization. *J Food Eng* 75:565–573



ERRATUM

**Erratum to: Valorization of Proteins from
Co- and By-Products from the Fish and Meat Industry**

**Tone Aspevik¹ · Åge Oterhals¹ · Sissel Beate Rønning² ·
Themistoklis Altintzoglou³ · Sileshi Gizachew Wubshet² ·
Asbjørn Gildberg^{3,4} · Nils Kristian Afseth² ·
Ragnhild Dragøy Whitaker³ · Diana Lindberg² **

Published online: 16 May 2017

© Springer International Publishing Switzerland 2017

**Erratum to: Top Curr Chem (Z) (2017) 375:53
DOI 10.1007/s41061-017-0143-6**

The original version of this article unfortunately contained a mistake. The spelling of the fourth author was incorrect. The correct name is Themistoklis Altintzoglou. The original article was corrected.

The online version of the original article can be found under doi:10.1007/s41061-017-0143-6.

Chapter 9 was originally published as Aspevik, T., Oterhals, A., Rønning, S. B., Altintzoglou, T., Wubshet, S. G., Gildberg, A., Afseth, N. K., Whitaker, R. D. & Lindberg, D. Top Curr Chem (Z) (2017) 375: 57. DOI 10.1007/s41061-017-0146-3.

✉ Diana Lindberg
diana.lindberg@nofima.no

¹ Nofima AS, P.B. 1425 Oasen, 5828 Bergen, Norway

² Nofima AS, P.B. 210, 1431 Ås, Norway

³ Nofima AS, P.B. 6122 Langnes, 9291 Tromsø, Norway

⁴ Ildervegen 27, 9017 Tromsø, Norway